


- 1 PROTECCIÓN CONTRA TIPOS VENENOSOS DE **POLVO, HUMOS, AEROSOLES**
- 2 CONTRA **VIRUS, BACTERIAS Y HONGOS**
- 3 EVITAN LA **IRRITACIÓN** DE LAS VÍAS RESPIRATORIAS



Descripción

- ▶ Mascarilla FFP3 preformada sin válvula de exhalación, desechable.
- ▶ Certificada contra polvos dolomita.
- ▶ Clip nasal ajustable.
- ▶ Tacto muy suave.
- ▶ Estructura muy ligera para una fácil respiración y un uso cómodo durante largos periodos de uso.
- ▶ Cintas elásticas ajustables sobre la cabeza, soldadas.
- ▶ Sin partes metálicas.
- ▶ Libre de látex para evitar irritaciones.
- ▶ Construcción ultra resistente, diseñada para soportar situaciones de calor o humedad.
- ▶ Sello facial que evita la apertura de los bordes: la espuma de sellado de media cara y las cintas ajustables refuerzan el sellado con menor fuga.
- ▶ Su forma anatómica se adapta a todas las tallas.

STANDARDS

EN 149+A1

Materiales

- ▶ Polipropileno

Aplicaciones

- ▶ Indicada para polvos tóxicos, humos y polvos con base acuosa. Para trabajos con fibras o partículas molestas. Contra asbestos, plomo, humos de acero y zinc, sulfuro de cromo y aceite, limpieza de tubos de refrigeración, etc.

D - Indicada para polvos muy finos llamados **DOLOMITA**: ideal para exposición a polvos de maderas.


Embalaje

20 uds (caja pequeña) / 400 uds (caja grande)



WWW.SAFETOP.NET



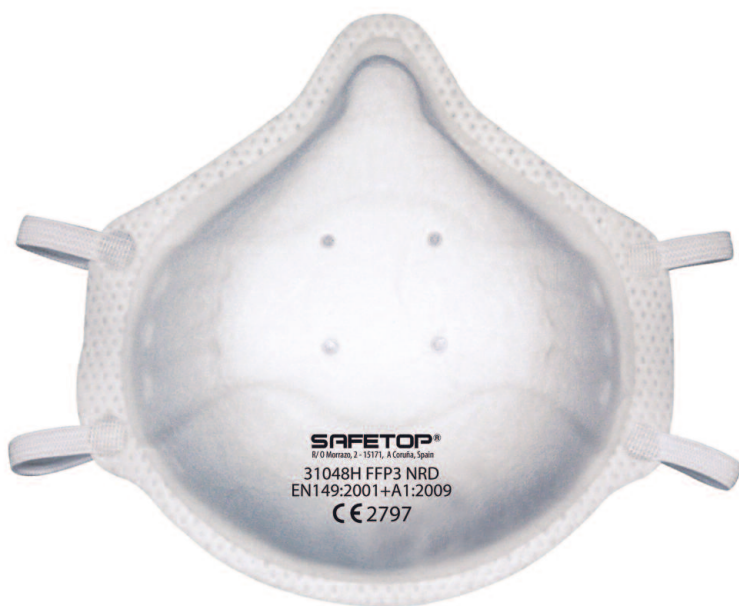


FFP3 NR
50 TLV

CE

D DOLOMITE
CLOGGING

metal
free

- 1 PROTECTION AGAINST
POISONOUS TYPES
OF DUST, SMOKE, SPRAY
- 2 AGAINST VIRUSES,
BACTERIA AND FUNGI
- 3 AVOID IRRITATION
OF THE RESPIRATORY TRACT

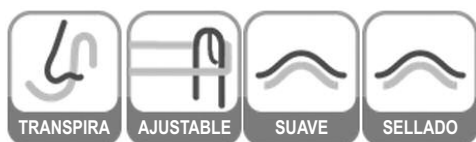

Description

- ▶ FFP3 disposable mask without exhalation valve.
- ▶ Certificate for dolomite clogging.
- ▶ Adjustable nose clip.
- ▶ Very soft touch.
- ▶ Lightweight structure results in easy breathing and comfortable wear.
- ▶ Ergonomic mask shape provides custom seal for different facial sizes.
- ▶ No metal material is used for the masks with welding elastic strap.
- ▶ Apply latex free material to avoid irritation.
- ▶ Half face seal foam and adjustable strap reinforces the seal with lowest leakage.
- ▶ Welding elastic straps.

STANDARDS

EN 149+A1

Materials

- ▶ Polypropylene

Applications

- ▶ Indicated for toxic dusts, fumes and aqueous based powders. For work with annoying fibers or particles. Against asbestos, lead, steel and zinc fumes, chrome sulphide and oil, cleaning of cooling pipes, etc.
- D - Indicated for very fine dusts called DOLOMITE: ideal for exposure to dust of woods.

Packaging

20 pcs (small box) / 400 pcs (big box)



WWW.SAFETOP.NET

