SAFETOP®

SAFETOP INNOVATIVE PROTECTION SL.

GENERAL CATALOGUE 2023

981 649 811

info@safetop.net

pedidos@logasl.com

www.safetop.net

Rúa O Morrazo, 2
15171, Iñás, Oleiros
A Coruña, España
Tel. 981 64 98 11
info@safetop.net



www.safetop.net

Safetop develops, innovates and manufactures its own products in different factories around the world.

Founded in 1990

The company has just celebrated its 33rd anniversary, achieving the Ardan awards as a highly productive and wealth-generating company.


Agents in more than 15 countries

We have agents and distributors in more than 15 countries, with a growth of more than 20% in recent years.

www.safetop.net

From 1990

We have facilities of more than
of more than 4500 square metres.

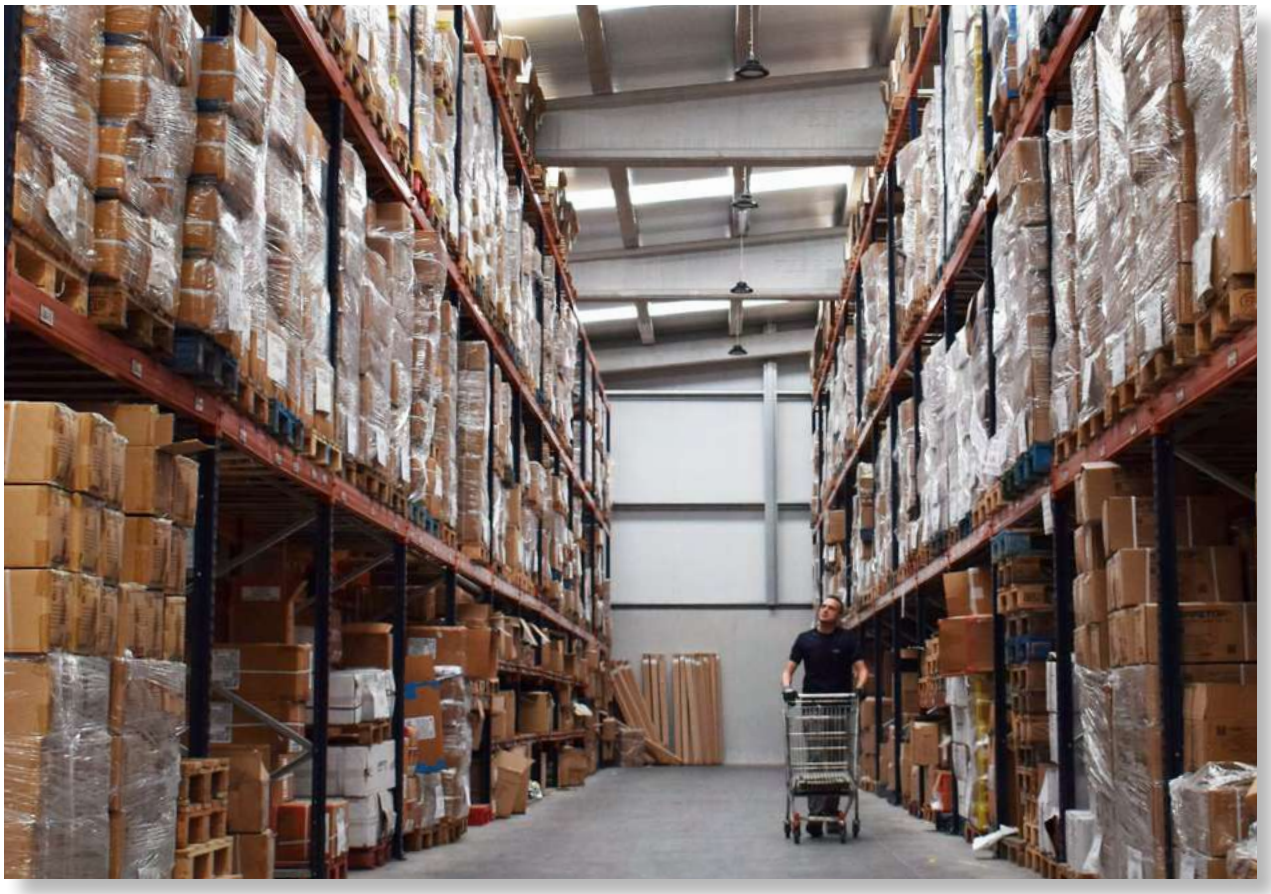

Ecommerce

We offer online shopping in a private shop for customers of our brand.

- Stocks
- Online ordering
- Access to invoices
- Many more advantages

Dispatch in 24/48 hours

Optimised transport service, with dePAIRtures within 24/48 hours to any point in Spain and Europe.

GENERAL CATALOGUE / 2023

CONTENT

Since 1990
Dispatch in 24/48 hours
Agents in more than 15 countries
Warehouse of more than 4500 m2

SAFETOP®

SAFETOP
Catalogue 2023
Copyright © 2023

All rights reserved


06

Eyewear

Glasses, eyewash, first aid, plasters and creams, prescription safety glasses. Accessories, filters and lenses


106

Head

Helmets and visors


40

Facial

Face shields, helmet shields, forestry kits and face shields


118

Workwear

Sets, T-shirts, technical clothing, knee pads, overalls or accessories


54

Welding

Welding screens, under helmets, attachable, automatic. Filters and filter covers


154

Footwear

Leather footwear, sport series, without metal PAIRts, water-resistant series


66

Respiratory

Masks, half masks and full face masks. Breathing equipment


166

Gloves

Complete range for all applications. Digitx® Series


92

Hearing Protection

Hearing protectors, earplugs, bands and dispensers


222

Fall arrest

Harnesses, ropes, carabiners, anchors, reels, tripods

EYE PROTECTION





Eye protection

LABOUR PROTECTION : CATALOGUE 2023



CE

CE LOGO
MANUFACTURER CODE
OPTICAL CLASS

1. Continuous work
2. Intermittent work
3. Occasional work

Impact resistance

S. Reinforced robustness
F. Low energy impacts 45ms
B. Medium energy impacts 120 ms
A. High energy impacts 190 ms
T. High velocity Particles at extreme of temperature (-5º / +55ºC)

Optical class

UV radiation 2 or 3
Infrared radiation 4
Solar radiation 5 or 6
Welding DIN 5-9

More information here

Optional requirements

K. Fine PAIRticle resistance
N. Anti-fogging resistance
H. Eye protection of small heads small

F. Maximum impact protection for universal glasses. **B.** Maximum impact protection for full-face spectacles. **A.** Maximum anti-impact protection for face shields. **CE.** All our equipment is duly certified according to EU Regulation 2016/425 on Personal Protective Equipment.

CE

CE LOGO

MANUFACTURER CODE

EN166 (harmonised standard)



Frame marking

Impact resistance

S. Reinforced robustness
F. Low energy impacts 45ms
B. Medium energy impacts 120 ms
A. High energy impacts 190 ms
T. High velocity Particles at extreme of temperature (-5º / +55ºC)
- No symbol: minimum robustness

Field of use

- No symbol: undefined risks
3. Liquids (droplets or splashes)
4. Dust with Particles larger than 5 microns
5. Dust with PAIRticle size less than 5 microns
8. Electrical arcing short-circuit
9. Molten metal splashes

Product standards

Standards

EN166: Specifications.
EN167: Optical test methods.
EN168: Other test methods

Rules by type of use

EN169: Filters for welding and related techniques
EN171: Infrared filters
EN172: Solar protection filters for industrial use
EN175: Equipment for welding work and related techniques
EN207: Laser safety goggles. EN208: Laser control goggles
EN379: active welding filters

Integral frame

Full frame spectacles are designed for all-round eye protection.

Applications and possible uses

+ Dust
+ Splashes of liquids
+ Particle projection
+ Long term use
+ Molten metal
+ Hot solids



>> All of our full-face goggles achieved a high level of impact protection.

>> Glasses of high technical level and extreme robustness.

>> Certified according to EN166 standard and EU Regulation 2016/425

10446. Scion.

Impact and chemical resistant.
Suitable for use over prescription lenses.







10510. Panavista

PVC goggle and polycarbonate lens with UV protection. Includes protected ventilation slots.

- Anti-fogging
- Anti-impact
- UV protection
- Material: PC, PVC and polyester
- Eyepiece thickness: 2.1 mm
- Wide viewing angle

EN166 1B 2C-1,2, EN170

10 UDS
100 UDS



10455. Gengis

Vinyl and PVC goggles with 180º perimetral 180º perimeter vision.
Ventilated

- Anti-impact
- Anti-fogging
- Anti-splash
- Anti-dust
- Material: PVC and polycarbonate
- Eyepiece thickness: 1.7 mm

EN166 1B 3 4

12 UDS
120 UDS

10500. Pextrem

Integral impact resistant chemical resistant goggle.
Valid for use over prescription lenses.
Double injection polycarbonate frame.
Panoramic vision 180º.

- Anti-fogging
- Anti-impact
- Anti-splash
- Anti-dust
- Anti-scratch
- High temperatures
- Material: PC, polyester and HTPR
- Eyepiece thickness: 1'5mm

EN166 1B T 3 4 K N

5 UDS
100 UDS



	Model	Reference	Frame marking	Lens marking
	**CLEAR**	**10500**	EN166 BT34	1 BTKN 2C-1,2
	**SMOKED**	**10508**	EN166 EN172 1 BT34	1BTKN 5-3,1



10445. Scion

Impact and chemical resistant.
Valid for use over prescription lenses.

- Vinyl face frame and polycarbonate ocular PVC frame
- Anti-fogging
- Anti-impact
- Valid for work with chemicals
- Anti-dust
- UV protection
- Material: PC, PP and TPE
- Eye thickness: 2,6 mm

EN166 1B 3 4

1 UDS
10 UDS

	Model	Reference	Frame marking	Lens marking	Packaging
	**CLEAR**	**10445**	EN166 1 B 3 4	1 B 2-3,1	1 ud / 10 uds
	**SMOKED**	**10446**	EN166 1 B 3 4, EN172	1 B 5-2,5	1 ud / 120 uds



10461. Duramaxx

Impact and chemical resistant.
Ideal in hot or humid conditions.

- Anti-shock
- Anti-fogging
- Anti-splash
- Anti-dust
- Anti UV
- Anti-scratch
- High temperatures
- Material: PP and TPE

EN166 1B T 3 4 K N

1 UDS
10 UDS

	Model	Reference	Frame marking	Lens marking	Packaging
	**CLEAR**	**10461**	EN166 1BT34	1BTKN 2C-1,2	1 ud / 10 uds
	**REPUESTO LENTE CLEAR**	**10462**	EN166 1BT34	1BTKN 2C-1,2	Pack de 10 uds



10410. Novel

PVC full frame spectacles. Perforated. Polycarbonate visor.

- Anti-shock
- Made of PC, PP and PVC

EN166 1B

6 UDS
150 UDS



10420. Jolly

PVC full frame goggle with 4 ventilation valves. Polycarbonate visor.

- Anti-shock
- Ventilated
- Made of PP and PVC

EN166 1B

6 UDS
150 UDS



11290. Cryo

Goggles certified for liquid nitrogen (prolonged contact).

- Anti-fogging
- Anti-impact
- Anti-scratch
- High temperatures
- Molten metal
- UV protection

EN166 1 B 9 K N 2C-1,2

1 UD
6 UDS



10490. Phoenix CLEAR

Polycarbonate and polypropylene goggle with UV filter.
Elastic face band.

- Anti-shock
- Anti-fogging
- Anti-splash
- Anti-dust
- Anti UV
- Made of PC, PP, POM and TPE
- Thickness: 2,8 mm

EN166 1 B 3 4

6 UDS
150 UDS



Different eyepieces



10490. CLEAR



10498. SMOKED



10492. AMBER

Flippa

Welding goggles
with hinged front
DIN5



10115. SPACER-ONE DIN5

Welding goggle with DIN5 eyepiece, adjustable in length

- Anti-shock
- DIN5 protection
- Holes for cord insSIZEtion
- Mafe of PC and nylon
- Eye thickness: 2 mm

EN166 1F EN170

12 UDS
300 UDS



10860. Europe

Universal type welding goggles for welding, perforated guards and DIN5 lenses.

- Anti-shock
- CRYSTALes intercambiables
- Material: PP y CRYSTAL
- Eye thickness: 1,2 mm
- Diameter 50 mm

EN166 1F EN169

12 UDS
240 UDS



10810. Soplet

Model welding goggles with cup and elastic band.
DIN5 lenses.

- Anti-shock
- Interchangeable lenses
- Material: PC, CRYSTAL and PVC
- Eyepiece diameter: 50 mm

EN 166 EN 169 EN 175 F

20 UDS
200 UDS



10910. Fippa

Integral flip-up welding goggles
with elastic strap.
DIN5 and clear lenses.

- Anti-shock
- Interchangeable lenses
- Material: PC, CRYSTAL and PVC
- Eyepiece diameter: 50 mm

EN 166 EN 175 F

12 uds
120 UDS



	SPARE PARTS	Reference	Packaging
	**50 mm DIN 4/5/6**	**7145(0)**	10 uds / 50 uds
	**50 mm Transparent**	**71400**	10 uds / 50 uds


TROMSØ

Pristina

Anti-shock glasses with bi-component frame.
Sporty and innovative design.

- Anti-impact
- High temperature
- UV protection
- Anti-fogging
- Material: PC and thermoplastic

EN166 1FTN EN170 2C-1

12 UDS
300 UDS



	Model	Reference	Temple marking	Lens marking	Packaging
	**CLEAR**	**10240**	EN166 1FTN	1FTN 2C-1,2	12 uds / 300 uds
	**SMOKED**	**10245**	EN166 1FTN EN172	1FTN 5-3,1	12 uds / 300 uds

Pompeia

Black-green contrast anti-shock sports goggles.
TPR polycarbonate and PVC frame.
Polycarbonate lens.

- Anti-impact
- High temperature
- UV protection
- Anti-fogging
- Material: PC, TPR, TPE, PVC and EVA

EN166 1FT EN170 2C-1,2

12 UDS
300 UDS



	Model	Reference	Temple marking	Lens marking	Packaging
	**CLEAR**	**10001**	EN166 1FT	1FT 2C-1,2	12 uds / 300 uds
	**SMOKED**	**10002**	EN166 1FT EN172	1FT 5-3,1	12 uds / 300 uds





+ Anti-Particles
+ Anti-fogging (N)
+ Anti-impact
+ Anti-scratch (K)
+ High temperature (T)
+ Ultraviolet filter

EVA Band
INTERIOR

Ventilation via
micro-holes

Phervey

Lightweight, compact spectacle with anti-dust inner band.
Extra durable, good colour recognition.
Polycarbonate lens.
TPE TPR EVA frame.

- Anti-impact
- High temperature
- UV protection
- Dustproof
- Anti-scratch (K)
- Anti-fogging (N)
- Material: PC, TPE, TPR and EVA
- Eye thickness: 1'8mm

EN166 1F T K N

12 UDS
300 UDS



	Model	Reference	Temple marking	Lens marking	Packaging
	**CLEAR**	**11200**	EN166FT EN170	1FTKN 2C-1,2	12 uds / 300 uds
	**SMOKED**	**11205**	EN166FT EN172	1FT 5-3,1	12 uds / 300 uds

Praetorius

Detachable goggle with temple and elastic strap.
Waterproof EVA inner band.

- Anti-impact
- High temperature
- UV protection
- Dustproof
- Material: PC, poliéster and HTPR
- Eye thickness: 1'8mm

EN166 1F T EN170 2C-1,2

12 UDS
300 UDS



INTERCHANGEABLE
TEMPLE AND STRAP



	Model	Reference	Temple marking	Lens marking	Packaging
	**CLEAR**	**10170**	EN166 1FT EN170	1FT 2C-1,2	12 uds / 300 uds
	**SMOKED**	**10175**	EN166 1FT EN172	1FT 5-3,1	12 uds / 300 uds

Portobello

Anti-shock goggle with wrap-around design.
Ideal for wearing around the neck when not in use.
Extremely lightweight. 21 gr.
Polycarbonate lens and temple.

- Anti-impact
- High temperature
- UV protection
- Anti-fogging
- PVC nose bridge
- Eye thickness: 2 mm

EN166 1FT EN170 2C-1,2

12 UDS
300 UDS



	Model	Reference	Temple marking	Lens marking	Packaging
	**CLEAR**	**10060**	EN166 1FT	1FT 2C-1,2	12 uds / 300 uds
	**SMOKED**	**10065**	EN166 1FT EN172	1FT 5-3,1	12 uds / 300 uds

Pinthega

POLYCARBONATE spectacles with interchangeable strap and temple.
EVA inner band.
Height ADJUSTABLE eyepiece.

- Anti-shock
- Anti-fogging
- Anti-dust
- Anti UV
- Material: PC, EVA and TPE
- Eye thickness: 2mm

EN166 1F EN170 2C-1,2

8 UDS
200 UDS





INTERCHANGEABLE
TEMPLE AND STRAP

	Model	Reference	Temple marking	Lens marking	Packaging
	**CLEAR**	**10130**	EN166 1F EN170	1F 2C-1,2	8 uds / 200 uds
	**SMOKED**	**10135**	EN166 1F EN172	1F 5-3,1	8 uds / 200 uds



Phoebe

Polycarbonate goggle with increased robustness.
Comfortable and lightweight.
Adjustable temples in extension.

- Anti-fogging
- Anti-impact
- UV protection
- Material: PC and nylon

EN166 1F S



	Model	Reference	Temple marking	Lens marking	Packaging
	CLEAR	10220	EN166 1F EN170	1F 2C-1,2	12 uds / 300 uds
	AMBER	10225	EN166 1F EN170	1F 2C-1,2	12 uds / 300 uds
	SMOKED	10228	EN166 1F EN172	1F 5-3,1	12 uds / 300 uds



10234. PAIRthia

Wide vision spectacle with curved eyepiece and extra lateral protection.

- Anti-impact
- Anti-fogging
- UV protection
- Made of PC and TPR

EN166 1F

12 UDS
300 UDS



10050. Puuwai

SMOKED goggles with extra resistant nylon frame. Multi-purpose use for work and leisure.

- Anti-shock
- High temperatures
- UV protection
- Material: PC and nylon

EN166 1F T EN 172 5-3,1

10 UDS
300 UDS



10355. Pambre

High quality glasses with advanced optics. Soft cushions.

- Anti-shock
- Anti-fogging
- UV protection
- Material: PC and TPR

EN166 1F EN 170

10 UDS
200 UDS



Arty

Lightweight, compact and very wrap-around spectacle. Eyepiece 2.4 mm thick.

- Anti-shock
- Anti-fogging
- UV protection
- Made of PC, TPE, TPR, EVA

EN166 1F EN 170

12 UDS
300 UDS



Phaeton

Glasses with a curved line that perfectly adapts to the facial contour. In one piece. Nylon temples adjustable in height and extension.

- Anti-shock
- Anti-fogging
- UV protection
- Possible cordon laying
- Material: PC and nylon
- Eye thickness: 2,8 mm

EN166 1F

12 UDS
300 UDS

Different eyepieces



11100. CLEAR



11120. AMBER



11185. SMOKED

Different eyepieces



11300. CLEAR



11340. MIRRORED



11320. AMBER



11385. SMOKED



11113. PAIRty

Indoor/Outdoor glasses made of polycarbonate. Slightly smoked.

- Anti-flashing and blackout
- Against Particles
- Certified for long periods of use

5 – 1,7 1 FT EN 166 FT

12 UDS
240 UDS



10460. Cencom

Aviator style spectacles with inner foam, Ventilated and adjustable strap.

- Anti-shock
- Ventilated
- Material: PC, nylon, PVC and TPR

EN166 1F

12 UDS
120 UDS



10360. Penfro

Exceptionally wide spectacle with flexible nylon frame.

- Anti-shock
- Anti-fogging
- UV protection
- De PC, nylon and TPR

EN166 1F EN 170

12 UDS
300 UDS



Spacer One

Economical version of the Spacer, adjustable in length.

- Anti-shock
- UV protection
- Holes for cord insSIZEtion
- Made of PC and nylon

EN166 1F EN170

12 UDS
300 UDS



Visitor

Full polycarbonate goggle with triangular side shields.

- Anti-shock
- UV protection
- Holes for cord insSIZEtion
- Made of PC

EN166 1F 2C-1,2 EN170

10 UDS
250 UDS

Different eyepieces	
	10110. CLEAR
	10122. SMOKED

Different eyepieces	
	10300. CLEAR
	10320. AMBER





Argo

Goggle with curved eyepiece extended on the side for greater protection. Flexible nylon temples.

- Anti-fogging
- Increased robustness
- Anti-impact
- UV protection
- Material: PC, nylon, PVC and TPR

EN166 1 F 2C-1,2

12 UDS
300 UDS

	Model	Reference	Temple marking	Lens marking	Packaging
	**CLEAR**	**10630**	EN166 1FS	1F 2C-1,2	12 uds / 300 uds
	**AMBER**	**10632**	EN166 1FS EN170	1F 2-1,2	12 uds / 300 uds
	**SMOKED**	**10635**	EN166 1FS EN172	1F 5-3,1	12 uds / 300 uds



Phibes

Goggles with a wide field of vision and high optical quality.

- Anti-impact
- Anti-fogging
- High temperature
- UV protection
- Mafe of PC and TPR

EN 166 1F T EN 170

10 UDS
200 UDS



	Model	Reference	Temple marking	Lens marking	Packaging
	**CLEAR**	**10260**	EN166 1FT EN170	1FT 2C-1,2	10 uds / 200 uds
	**SMOKED**	**10265**	EN166 1FT EN172	1FT 5-3,1	10 uds / 200 uds

Spacer

Goggle with side shields adjustable in length and height (5 positions).
High quality polycarbonate lenses.
Nylon frame.

- Anti-shock
- Anti-fogging
- UV protection
- Holes for cord insSIZEtion
- Made of PC and nylon
- Eye thickness: 2,3 mm

EN 166 1F

12 UDS
300 UDS



Different eyepieces


10100. CLEAR


10120. AMBER

Pandora

Goggle with removable inner seal made of very soft foam to prevent dust intrusion

- Anti-impact
- Anti-fogging
- High temperature
- UV protection
- Made of PC, TPR and NBR/PVC

EN166 1 2C-1,2 FT

10 UDS
200 UDS



	Model	Reference	Temple marking	Lens marking	Packaging
	**CLEAR**	**10270**	EN166 1FT EN170	1FT 2C-1,2	10 uds / 200 uds
	**SMOKED**	**10275**	EN166 1FT EN172	1FT 5-3,1	10 uds / 200 uds
	**POLARISED**	**10278**	EN166 1FT EN172	1FT 5-3,1	1 ud / 200 uds



Patriot

Goggles adjustable in height and length.
High corrosion resistance

- Anti-impact
- Anti-fogging
- UV protection
- High temperatures
- Made of PC and nylon

EN166 1FT 2C-1,2 EN170

12 UDS
300 UDS

	Model	Reference	Temple marking	Lens marking	Packaging
	**CLEAR**	**11400**	EN166 1FT	1FT 2C-1,2	12 uds / 300 uds
	**MIRRORED**	**11440**	EN166 1FT EN172	1FT 5-3,1	12 uds / 300 uds
	**SMOKED**	**11485**	EN166 1FT EN172	1FT 5-3,1	12 uds / 300 uds



Perth

Advanced optical quality spectacle
with Hard Coating treatment

- Anti-impact
- UV protection
- Anti-fogging
- High temperatures
- Made of PC, nylon and TPR

EN 166 1 2C-1,2 FT EN 170

10 UDS
200 UDS

	Model	Reference	Temple marking	Lens marking	Packaging
	**CLEAR**	**10370**	EN166 1FT EN170	1FT 2C-1,2	10 uds / 200 uds
	**SMOKED**	**10375**	EN166 1FT EN172	1FT 5-2,5	10 uds / 200 uds

Pyros

Lightweight, compact spectacle with very soft nose bridge.

- Anti-impact
- UV protection
- Made of PC, TPE and TPR

EN166 1F

12 UDS
300 UDS



	Model	Reference	Temple marking	Lens marking	Packaging
	**CLEAR**	**10214**	EN166 1F	1F	12 uds / 300 uds
	**GRADUATED**	**10215**	EN166 1F	1F	1 ud ON REQUEST
	**WITH BINOCLE**	**10210**	EN166 1F	1F	12 uds / 300 uds

Graduated Pyros

> Optical prescription required
> Graduation for near, far or progressive vision

10215. Pyros RX System

Under budget according to optical prescription. Deadline 1 month from order.

- Anti-impact
- UV protection
- Made of PC, TPE and TPR

EN166 1F

1 UD
ON REQUEST



Pacific

REMOVABLE SIDE GUARDS

Blue mirrored eyepiece.
Goggle with folding and detachable lenses.
Available POLARISED. For multipurpose use at work and leisure.

- Anti-impact
- UV protection
- DMade of PC
- Blue mirrored eyepiece

EN166 1F 5,3-1

12 UDS
300 UDS



	Model	Reference	Temple marking	Lens marking	Packaging
	**Blue MIRRORED**	**10388**	EN166 1F EN172	1F 5-3,1	12 uds / 300 uds
	**POLARISED**	**10389**	EN166 1F EN172	1F 5-3,1	1 ud / 300 uds



* Presentation Pacific Polaris

Accessories

10010 Polyamide cord with silicone fasteners.**10016** Wide foam band sports cord. **10031** Flexible polyester cover with zip. **10037** Semi-hard case for curved and sporty models. **10022** Flip-up DIN5 adaptable to prescription spectacles.

10010



10016



10037



10022



10031



10025 100 wipes and cleaning fluid with anti-fogging properties, for cleaning glass or polycarbonate glasses. **11701 Filled with 45 strips distributed in two refills, waterproof. Size 23x13,5 cm. 11700** Dispenser of 45 waterproof plasters. Size 23x13,5 cm. **11720** Dispenser set for plasters and single-dose ampoules with eyewash solution.

10025




11701



11700



11720



Eyewash solutions





Saline solution

Sterile sodium chloride 0.9% for cleaning and rinsing of the eyes. Suitable for Particles and dust

500 ml	200 ml
11020	11019



11710. Duo 500 ml

Saline solution equipped with Duo eye cup for flushing both eyes simultaneously.

500 ml



11711. PH Duo 500 ml

Sterile 4.9% phosphate solution that neutralises acids and alkalis, equipped with Duo eye cup.

500 ml



11712. PH Neutro 200 ml

Sterile 4.9% phosphate solution that neutralises acids and alkalis. Rapidly neutralises the pH level of the eye.

200 ml



11025. Saline spray

Sterile 0.9% sodium chloride saline spray for rinsing and cleansing of eyes or superficial wounds.

50 ml



Plutect Dual

Skin care cream for before and after work. Ideal for water-based and non-aqueous substances.

100 ml	700 ml
11041	11042

First Aid Kits

For easy access to first aid in case of minor accidents. All-in-one solution ideal for almost any workspace.



11705. Quicksafe

Wall mounted first aid cupboard. Includes eye wash, neutral PH, burn gel, wipes, bandages, plasters and single-dose ampoules.



11715. Transport kit

30x19x6 cm. Carrying kit with 200 ml bottle of saline solution with 0.9% sterile sodium chloride for rinsing and cleaning the eyes; suitable for both nuisance Particles and dust.



11023. Double station

Wall cabinet with mirror and two 500 ml eyewash solutions: 0.9% sterile sodium chloride saline solution, for cleaning and rinsing the eyes.



23010. Wall-mounted first aid kit

31X31 cm. 7 compartments and security lock with key. Includes bandages, cotton wool, scissors, tweezers, hydrogen peroxide, dressings, povidone, saline solution, adhesive tape, gauze, latex gloves.




23020. Portable first aid kit

30x19x6 cm. First aid kit for first aid. Contains adhesive tape, tourniquet tape, dressings, alcohol tampons, alcohol pads, scissors, tweezers, cotton wool, plasters.



23015. First Aid Kit For automobile

Portable first aid kit. Contains adhesive tape, bandages, burn compresses, bandages, gauze, scissors, dressings, an insulated blanket, bandages, latex gloves and first aid sheet.

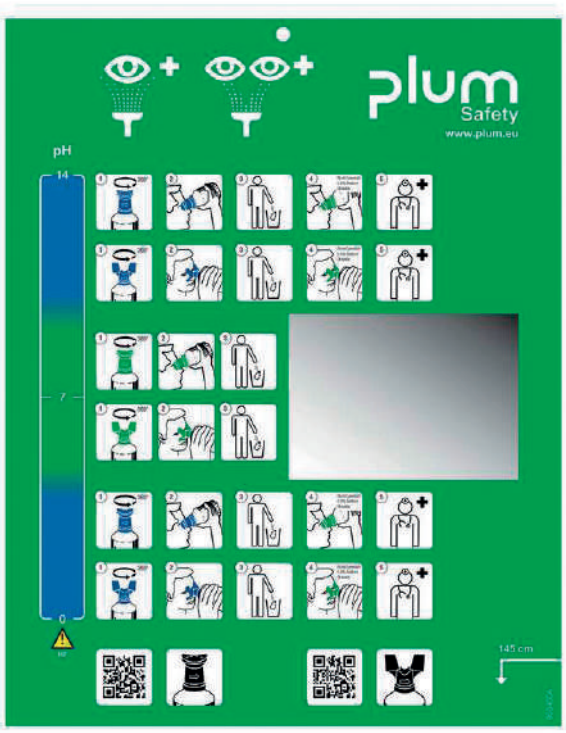



11024. Plum combi

Wall cabinet with two eyewash solutions: 500 ml saline solution and 200 ml PH Neutral. Intended for rinsing and cleaning eyes.

✔ Including use table with mirror



EYE WASHER

Showers

Eyewash showers, available
for free-standing or wall-mounted
insSIZEtion



11012. Steel wall shower

Wall mounted safety shower. Activated by handle. Operated by a handle.



11014. Floor-standing steel eyewash

Independently mounted eyewash basin. Internal flow control. Activated by handle or foot.



11016. Wall-mounted pool

Wall mounted eyewash basin made of ABS plastic. Includes two spray heads. Each head has a Dustproof cover. Activated by handle.



11027. PVC eyewashes

Free-standing pedestal mounted eyewash. With two spray heads, each with a Dustproof cover, internal flow control and filter to remove impurities from the water flow.

SPARE PARTS Showers



11010. Steel standing shower

Combination eyewash and safety shower. 76 litres of water per minute in the shower and 11.5 litres in the basin.



11026. PVC shower

PVC shower with eyewash and handle, two spray shower heads. 76 litres of water per minute in the shower and 11.5 litres in the basin.



11013. Portable shower

Portable emergency eyewash shower with 1.5 metre hose. Suitable for use with a half inch water supply.



11011. Stainless steel standing shower

Combination eyewash and safety shower in stainless steel. 76 litres of water per minute in the shower and 11.5 litres in the basin.

FACE PROTECTION







FaceGuard

Wrap-around face shield adjustable in length and height. Extra curved visor 2 mm.



- 180º vision
- UV protection
- Soft front sweatband
- Colour recognition
- Articulated multiple positions
- Adaptable to any contour, with roulette
- Replacement visors available
- Folding

EN 166 1B 2C-1,2

Available versions

B Impact protection visor B

A Impact protection visor A

1 UDS
10 UDS

205x395 mm
Thickness 2 mm

		Model	Reference	Temple marking	Lens marking	Packaging
B		FaceGuard	79000	EN166 1 B	1 B 2C-3,1	1 ud / 10 uds
A		FaceGuard-A	79003	EN166 1 A	1 A 2C-3,1	1 ud / 10 uds
		SPARE PARTS	**Reference**	**Temple marking**	**Lens marking**	**Packaging**
B		Visor Class B	79001	-	1 B 2C-3,1	1 ud / 10 uds
A		Visor Class A	79005	-	1 A 2C-3,1	1 ud / 10 uds
		Suspension	79002	-	-	1 ud / 10 uds



305 x 267 mm
Thickness 2 mm



A

THERMAL

79060. TurboShield

Face shield CLASS A High impact.
Interchangeable visors

- Improved protection
- Superior comfort
- Possibility to replace the visor

EN166 1 AT39

79066
Head harness



79068
Transparent visor

79069
Visor DIN5



79067
Helmet adapter



205x230 mm
Thickness 1.5 mm



THERMAL

79050. Bionic

Interchangeable visors

- Anti-impact
- High temperatures
- Anti-splash and molten metals
- UV protection

EN166 1 BT39

79052
Suspension



79051
Clear viewfinder



79056
Acetate viewfinder

79055
Visor DIN5




Honeywell

395x240 mm
Thickness 1.5 mm



79045. CryoClear

- Face shield against liquid nitrogen.
- Polycarbonate visor 395 x 240 x 2
- Against Class A PAIRticle impacts
- Against electric arc
- Against molten metal splashes

EN166 1 AT89 EN170

Transparent visor 79046

200x390 mm
Thickness 1 mm



79207. FacyPlus

Face shield with side guards

- Adjustable width and height
- Side folds for increased safety

EN166 1 BT39

Suspension 79306
Transparent hinged visor 79208

200x395 mm
Thickness 1 mm



79400. Facy

Face shield with extra wide 200x395 mm visor.

EN166 1 B3

Suspension 79406
Transparent hinged visor 79405

205 x 400 mm
Thickness 1 mm



THERMAL

79300. Superface

Anti-splash face shield and cast metal.
High temperature protection

EN166 1 BT39

Suspension 79306
Transparent hinged visor 79305
Screw + nut + ring kit 79301



THERMAL

79350. Superface Green

DIN5. anti-splash and molten metal.
High temperature protection

EN 166 1B T 3

Suspension 79306
DIN5 tilting viewfinder 79355
Screw + nut + ring kit 79301

220 X 260 mm
Thickness 1,4 mm



CHEMICAL

79100. Perforama-AC

Acetate face shield, ideal for chemicals, acids, sprays and solvents.

EN 166 1F

Transparent visor 79115
Chin piece 79608

180 x 390 mm
Thickness 1,3 mm



THERMAL

79200. Facemaster

Face shield with chinstrap cover piece, hinged. With stripping strip.

180 x 390 viewfinder 180º viewing angle
Easily replaceable
Various height adjustments and textile harness

EN166 1 BT3

Suspension 79306
Transparent visor 79205
Chin piece 79206

Accessories

79174B Universal bracket for attaching visors to helmets **79745** Safetop bracket for attaching Safetop visors to Safetop helmets. **79746** Bracket for attaching Safetop brackets to Safetop helmets. **79746-CL** Climber helmet bracket.

79174B



- Universal bracket for attaching screens to helmets with visors by means of an elastic band

79745



- Safetop Carrier for Safetop helmets with visor, with a secure fit clip

79746-CL



- Safetop brackets for Climber helmets. 2 are required per user

79746



- Safetop "Brackets" to attach the "Carrier" Brackets are placed in the slots of the helmet. 2 are needed per user.

HELMETS COMPATIBLES

79746



79746-CL





Superface Green

With DIN5 indicator.
Adjustable in length and height

Dockable displays



200x400 mm
Thickness 1 mm



THERMAL

79710. Superface Combi

Foldable face shield attachable to helmet with aluminium rim.

EN166 1B T 9 3

Carrier bracket 79745
Brackets 79745
Transparent visor 79305
Screw + nut + ring kit 79301

THERMAL

79715. Superface Combi Green

DIN5 flip-up face shield, attachable to helmet, with aluminium rim

EN 166 1B T 3

Carrier bracket 79745
Brackets 79745
Sight glass DIN5 79355
Screw + nut + ring kit 79301



400x180 mm
Thickness 1 mm

THERMAL

79209. Facemaster Combi

Fascia visor can be attached to helmet, with chin piece

EN166 1 BT3

Transparent visor 79115
Chin piece 79608



200x390 mm
Thickness 1 mm



200x395 mm
Thickness 1 mm

THERMAL

79712. Facy Plus Combi

Foldable face shield attachable to helmet with side shields.

EN 166 1B T 9 3

Carrier bracket 79745
Brackets 79745
Transparent visor 79208

79713. Facy Combi

Folding face shield with visor extra wide

EN166 1 B3

Carrier bracket 79745
Brackets 79745
Transparent visor 79405



COMPATIBLE HELMETS

79710. 79715. 79209. 79712. 79713 FIT
THE FOLLOWING HELMETS:

Available in different colours



80610. SP



80520. SR



80540. AR



80530. ER

CLIMBER

* For CLIMBER range helmets, the screens are supplied with bracket 79745-CL, with the following References



79710-CL



79715-CL



79209-CL



79712-CL



79713-CL

Kits with helmet



81540. Ecap electricians



High-impact class A hinged arc flash shield and helmet, against molten metal.

EN 166 1A EN 170 EN 397 EN 50365

- Transparent visor 79046 395x240 mm y Grosor 2 mm
- Helmet A79R-E 80540
- Carrier support 79745
- Bracket 79746



81560. Kit Climber Superface

Kit with Climber helmet and flip-up face shield splash shield 79710.

EN 166 1B T 9 3 EN 397 EN 50365

- Superface Combi Climber 79710-CL
- Interchangeable visors
- Image: Viewfinder 79710-CL
- 200x400 mm y Thickness 1 mm
- Helmet Climber 80660



79150. Kit forestal SR

Forestry ensemble with helmet, SNR 25.9 DB hearing protector and flip-up mesh visor.

EN173 EN397 EN352

- Mesh visor 79505 200x390mm y Thickness 2 mm
- SR Helmet 80520
- Auditory 82305N
- Viewfinder support 79745



79705. Kit Superface SR

Face shield kit with flip-up visor and ear protection with SR helmet.

EN166 1 B EN397 EN352-3

- Transparent visor 79305 200x390 mm y Thickness 1 mm
- Suspension 79745
- Brackets 79746
- SR Helmet 80520
- Auditory 82305N



79510. Set forestal

Forestry set with folding mesh visor and integrated SNR 27.5 DB hearing protector.

EN1731 1F EN352

- Mesh visor 79505

200x390mm y Thickness 2 mm



79500. Facy Metal

Folding face shield with steel mesh visor. Various positions.

EN1731 1F

- Suspension 79406
- Mesh visor 79505

200x390mm and Thickness 2 mm

WELDING PROTECTION





Welding shields

70430. Protashell

Vulcanised fibre screen

EN175



108x51 mm

70410. Protashell Baby

Vulcanised fibre screen

EN175



108x51 mm



108x51 mm

70405. Weldmaster

Thermoplastic with hinged window and filters

EN175



108x51 mm

70920. Wedlman

Made of thermoplastic, with inner handle

EN175

Hoods and hoods



20570. Monkshood

Flame retardant cotton hood
62 cm

EN ISO 11612
EN ISO 13688



20571. Noonshood

Flame retardant cotton hood
44 cm
Rounded model

EN ISO 11612
EN ISO 13688

FILTER

20600 - 20700

REF. 716 (00)





20600. Safecap Flor

Foal leather screen with inner lens to fit welding filters

EN166 EN169



20700. Hoodcap

Croupon hood of split cowhide leather cowhide with thermal lining

EN169 (FILTER)



20550. Capyweld Plus

Leather mask with welding goggle

EN175

Attachable to helmet

70740. Weldmaster Combi

Hull mounted screen 108x51

EN175



108x51 mm

70700. Lamador Ultra Combi

Hull mounted screen 108x51

EN175



108x51 mm



1/1/1/2

70691. Shock Shell

Automatic welding kit with helmet DIN 4-9/13 Filter 1/1/1/2 . With clamping thread and chinstrap

EN175 EN397 EN50365



108x51 mm

81595. Kit de soldar Climber

Includes Climber helmet and Weldmaster screen

EN175 EN397 EN50365

(1) Consisting of: Dielectric helmet, hinged welding shield with automatic filter DIN 4-9/13 1112 and Transparent inner shield.

FILTERS

SPARE PARTS for standard welding screens

FILTERS

716(00) 110x55
DIN 9/14



717(00) 108X51
DIN 9/14



718(00) 110x90
DIN 9/14



CRYSTALS

71300 110x55
CRYSTAL



71320 110x90
CRYSTAL



71310 108X51
CRYSTAL



POLYCARBONATES

71500 110x55
POLYCARBONATE



71521 110x98
POLYCARBONATE



71510 108x51
POLYCARBONATE



POLYCARBONATES

71522 120x100
POLYCARBONATE



71520 110x90
POLYCARBONATE




71523 136x120
POLYCARBONATE




MIRRORS


711(11) 108x51
Gold Coated DIN 11



712(10) 110x90
Gold Coated DIN 10



712(11) 110x90
Gold Coated DIN 11





Material selector table

Applications	Material	Heat resistance Radiant heat	Contact heat	Weight
Made of high quality flame-resistant material, they are perfectly suited for hot welding tasks and with high brightness intensity. They are water resistant and fit all European sizes.	Fibre vulcanised	+++	++	Under
When additional neck and head protection is required, especially for welding tasks at heights.	Thermoplastic	+++	+++	Under
Suitable for welding in very confined spaces and short welding times	Leather	++	++	Under

+++ = Particularly suitable ++ = Very suitable + = Adequate

Filters

Welding filters: manufactured in accordance with EN169. Identified by their grade number from 9 to 14 and by their size. They are made of CRYSTAL mineral fused and smoked in the mass and protect the eyes against welding rays. Laser cut polished.	Certification: EN 169 Packaging: 10 pcs / 100 pcs	
REF. 716 (00)	REF. 717 (00)	REF. 718 (00)
C. Mineral 110x55 mm - DIN 9/14	C. Mineral 108x51 mm - DIN 9/14	C. Mineral 110x90 mm - DIN 9/14

Filter covers

They protect the inactinic CRYSTAL from welding projections and extend its life. They are available in mineral CRYSTAL or POLYCARBONATE in different sizes. Laser cut polished.	Certification: EN 166	
REF. 71300 CRYSTAL	REF. 71320 CRYSTAL	REF. 71310 CRYSTAL
C. Mineral 110x55x2 mm / 100 uds	C. Mineral 110x90x2 mm / 100 uds	C. Mineral 108x51x2 mm / 100 uds
REF. 71500 POLYCARBONATE	REF. 71521 POLYCARBONATE	REF. 71510 POLYCARBONATE
110x55x1 mm / 50 uds	110x98x1 mm / 50 uds	108x51x1 mm / 50 uds
REF. 71522 POLYCARBONATE	REF. 71520 POLYCARBONATE	REF. 71523 POLYCARBONATE
120x100x1 mm. / 50 uds	110x90x1 mm / 50 uds	136x120x1 mm / 50 uds

** Other POLYCARBONATE sizes are available on request.
** The numbers in brackets indicate the shade of the filter.

GOLD COATED Filters

CRYSTALs are mirrored welding lenses for mounting on any type of screen. In contrast to the conventional ones, they offer a greater rest to the vision in long periods of work and reflect 80% of the heat. They are supplied in two sizes and only one shade for each of them.	Certification: EN 169 Packaging: 10 uds	
REF. 711 (11)	REF. 712(10)	REF. 712(11)
Gold Coated 108x51 mm - DIN 11	Gold Coated 110x90 mm - DIN 10	Gold Coated 110x90 mm - DIN 11

Automatic


- SENSITIVITY
- DIMMING SCALE
- DELAY
- TIG WELDING
- AUTOMATIC ON-OFF
- GRIND FUNCTION
- AUTOMATIC AUTO-DARKENING
- PAIRTICLE PROTECTION
- OPTIMAL AND ECONOMICAL

For more information about the items or their SPARE PARTS, please scan the qr codes at the bottom of the page.

70563-N. PROFILIGHT

DIN 5-8/9-13. 1/1/1/1

EN175F EN379

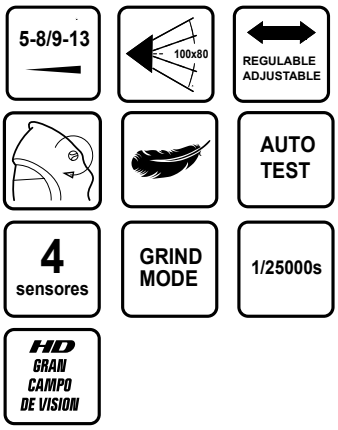




70567-N. AUTOSHELL PLUS

DIN 5-8/9-13. 1/1/1/2

EN166 EN175F EN379






70561-N. PROFI-ONE

DIN 9-13. 1/1/1/2

EN175F EN379








HD



70560. ProfiMax alta definición

Automatic welding screen with filter of highest quality

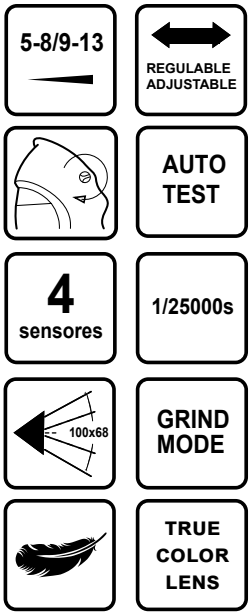

- Robust and ergonomic housing
- High definition filter 1/1/1/1
- High definition colour vision
- 4 solar cells
- Viewing area 100x68 mm
- DIN 5-8/9-13
- Soft front sweatband
- Grinding function
- Variable sensitivity
- Changeover time 1/25000 s
- UV protection/IR: DIN 16 (permanent)

EN175F EN379 EN166



1 Optical class excellent

-

1 Quality vision from any angle

-

1 Homogeneity

-

1 Good filter colour

RESPIRATORY PROTECTION




EUR
FILTRO COMBINATO MULTIGAS
EN 14387:2004

When to use a disposable mask?

When the oxygen concentration is above 17%.
I know what pollutant I am exposed to
The pollutant is olfactory detectable

Level of protection	FFP1	FFP2	FFP3
	NON-TOXIC POWDERS (silica, glass wool, graphite, cement, sulphur, coal, ferrous metals, soft wood, etc.)	FINE AND TOXIC Particles (sanding metal PAIRts, resin, fungi, etc) Against dusts, fumes or aerosols.	VERY FINE AND TOXIC Particles (lead, asbestos, ceramic ceramic fibres, concrete concrete spray, etc.) Against poisonous types of dust, smoke or aerosols
	DO-IT-YOURSELF AND OTHER (cutting and sanding wood, iron, steel, CRYSTAL, textile, etc)	INFLUENZA VIRUSES (tuberculosis, avian flu, influenza A, etc) ASBESTOS FIBRES (silicones, asbestos, lead, steel/zinc fumes, chromium sulphide, and oils	ASBESTOS OR ALLERGIES VIRUSES, BACTERIA AND FUNGI Asbestos (concentration less than 1 fibre/cm3 in 1 h) or legionella (short duration). Effective in case of pollen allergy. CHEMICAL INDUSTRY (oncogenic, poisonous Particles poisonous Particles, beryllium, nickel, uranium)

C CHARCOAL ACTIVE

Activated carbon
Models with activated carbon eliminate odours and nuisances caused by low levels of organic vapours that are found along with Particulates.

D POWERS DOLOMITE

Dolomite powders
The optional Dolomite clogging test is intended to check the maintenance of the filtering capacity when a certain amount of dolomite, a very fine dust that clogs the pores and saturates the filtering surface, is passed through the filter. Masks with the letter "D" are suitable for use against this type of dust. Ideal for exposure to wood dusts.

Exhalation valve
Valved models provide greater comfort, reduce moisture condensation on the inside, prevent the CRYSTALs from fogging up, offer a less resistant feel and help you breathe in and out easily.

Pre-formada
When the user breathes in, the valve closes the diaphragm; when the user breathes out, it opens. The valve releases air downwards to prevent condensation on the goggles. If the worker wears protective goggles, this helps to ensure that they are never fogged up.

Foldable vertically or horizontally
Very easy to store or keep

Exhalation valves reduce hot air from the interior and reduce breathing stress; they also make breathing easier in hot and humid environments.

Activated charcoal is used against nuisance organic vapours.

The contour is heat-sealed, and the adjustment elastics are either sealed to the mask or attached by quick-fastening devices.

Depending on their shape, they are divided into moulded and folded. The moulded ones always have a better facial adaptation; the folding ones are individually packaged, can be easily stored when not in use and can be horizontally folded, with a wide interior cavity; or vertically folded.

They have different classifications according to the nominal protection factor.

	FFP1NR	FFP2NR	FFP3NR
Filtration inside (TIL)	<22%	<8%	<2%
Penetration			
Solid aerosols	S<20%	S<6%	S<1%
Liquid aerosols	L<20%	L<6%	L<1%
Carbon dioxide content			
carbon dioxide content in inhalation		<1%	<1%
<1%			
Inhalation resistance	<0,6%	<0,7%	<1%
30 l/min (mbar)		mb	mb mb
Inhalation resistance	<2,1%	<2,4%	<3%
95 l/min (mbar)	mb	mb	mb
Inhalation resistance			
160 l/min (mbar)	<3 mb	<3mb	<3mb
(controlled by PPE,s)			

Applications

		FFP1	FFP2	FFP3
Painting (also with spray, varnishing, coatings)	Solvent based applied by roller			●
	Water based any application			●
	Treatments on wood			●
	Powder coatings			●
Sanding, deburring grinding, drilling	Oxides, many metals, cement, stone, agglomerates	●		
	Cement, wood, steel		●	
	Stainless steel, dirt-repellent coatings			●
	Resins, reinforced plastics, carbon, glass fibres		●	●
Construction, maintenance	Roughing, cement dust	●	●	●
	Demolition	●	●	
	Earthworks, shoring		●	●
	Insulation application		●	●
Metals, foundries	Welding		●	●
	Electroplating		●	●
	Finishing, drilling, riveting		●	●
	Oxyacetylene cutting		●	●
	Cast metal, cast aluminium		●	●
Cleaning and waste collection	Cleaning, disinfection		●	●
	Waste collection		●	●
Allergens, biological	Pollen, animal ash, allergies			●
	Mould, fungi, bacteria, viruses			●
Agriculture	Animal handling, harvesters	●	●	●
	Fodder, compost, crops		●	●
	Pesticides, insecticides, aerial spraying			●
Mining, quarrying	Tunnelling, drilling, excavation		●	●
	Pumping, dredging, washing		●	●
	Filter replacement		●	●
Other industrial industrialists	Inks, dyes, solvents			●
	Powder additives, chemicals, pharmaceuticals			●
	Plastics processing, rubber		●	●
	Extraction, oil and gas processing			●
	Ceramics			●
	Paper industry		●	●

FFP1 NR D



30201. FFP1 NR D

Concave preformed face mask with foam nose bridge

EN149+A1

Dolomite

20 UDS
400 UDS



30200. FFP1 NR D

Concave preformed face mask with foam nose bridge

EN149+A1

Dolomite

20 UDS
400 UDS



30301. FFP1 NR D

Preformed face mask with double construction and valve

EN149+A1

Dolomite

12 UDS
240 UDS

FFP2 NR D



31600M. FFP2 NR D

FFP2 preformed facepiece with exhalation valve

EN149+A1

Dolomite

12 UDS
240 UDS



30220. FFP2 NR D

Concave preformed mask. Without valve

EN149+A1

Dolomite, staple-free

20 UDS
400 UDS



31052. FFP2 NR D

Vertical folding face mask without valve

EN149+A1

Dolomite

12 UDS
400 UDS



30315 FFP2 NR D

Mask with mesh
and valve. Metal free

EN149+A1

Dolomite, staple-free

10 UDS
120 UDS



30310H FFP2 NR D

Preformed mask with valve
Metal free

EN149+A1

Without staples

12 UDS
240 UDS



31600. FFP2 NR D

Vertical folding mask with valve
Single adjustable elastic

EN149+A1

Dolomite, sin grapas

12 UDS
240 UDS



31830 FFP2 NR D

Horizontal folding mask
with valve. 3 panels

EN149+A1

Dolomite, sin grapas

10 UDS
400 UDS



30330. FFP2 NR D

Foldable face mask with valve

EN149+A1

Dolomite, sin grapas

12 UDS
240 UDS



30300M. FFP2 NR

Preformed facepiece FFP2 made of
polypropylene with valve

EN149+A1

Dolomite

20 UDS
400 UDS



31053. FFP2 NR D

Vertical folding mask with valve.
Single adjustable elastic

EN149+A1

ACTIVATED CARBON

15 UDS
150 UDS



31100. FFP2 NR

Preformed metal free face mask with two
exhalation valves. Metal free

EN149+A1

Without staples

ACTIVATED CARBON

5 UDS
100 UDS



30300. FFP2 NR D

Concave preformed face mask with
exhalation valve

Not a PPE

Dolomite

12 UDS
240 UDS

FFP3 NR D



31048H. FFP3 NR D

Preformed mask
without valve

EN149+A1

Dolomite, staple-free

20 UDS
400 UDS



30340. FFP3 NR D

Foldable face mask with valve.

EN149+A1

Dolomite, staple-free

12 UDS
240 UDS



30358. FFP3 NR D

Preformed mask
with valve

EN149+A1

Dolomite
ACTIVATED CARBON

5 UDS
100 UDS



31330. FFP3 NR D

Horizontal folding mask with valve
Single adjustable elastic

EN149+A1

Dolomite, staple-free

12 UDS
240 UDS



30345. FFP3 NR D

Mask with valve and mesh.
Metal free

EN149+A1

Dolomite

5 UDS
100 UDS




31700H. FFP3 NR D

Vertical folding mask.
Single adjustable elastic

EN149+A1

Dolomite, staple-free
Inner foam

12 UDS
240 UDS

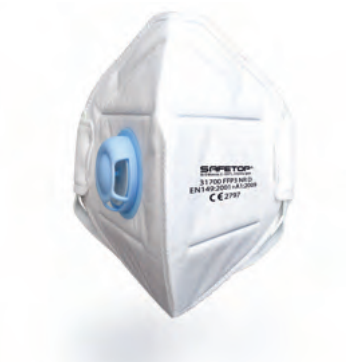

31700. FFP3 NR D

Vertical folding mask.
Single adjustable elastic.

EN149+A1

- Dolomite, staple-free

12 UDS
240 UDS



30350. FFP3 NR D

Preformed mask.
With valve

EN149+A1

- Dolomite, staple-free

5 UDS
100 UDS



31700M. FFP3 NR

FFP3 vertical folding respirator, with valve

EN149+A1

- Without staples

12 UDS
240 UDS



30350M. FFP3 NR

Polypropylene preformed face mask with valve

EN149+A1

- Without staples

5 UDS
100 UDS

FFP3 R D Reusable



30355. FFP3 R D

- Reusable mask
- Soft face seal contoured with foam for superior comfort
- The internal face seal can be cleaned for multiple uses
- Latex-free material to avoid irritation
- Exhalation valve reduces hot air build-up and eases breathing in hot/humid environments
- Dolomite

EN149+A1

5 UDS
100 UDS

SAFETOP®
SERIES



4600/4700 Series



34600. Half Mask 4600 Series

TPR half mask designed to fit 2 filters. Compatible with other EPIS

1 UDS
20 UDS

- 4-point harness
- With central exhalation valve
- Excellent field of vision
- Gentle on the skin

EN140



34700. Full face mask 4700 Series

Class 2 silicone full face mask, designed for use with 2 filters

1 UD
4 UDS


- Anti-fogging
- 180º vision
- Hardened distortion-free High Impact Visor
- Protección UV
- Hypoallergenic

EN136

FILTERs disponibles For 34600 y 34700



A1 Gas filter 34601



P3 Dust filter 34605



ABEK1P3 Combination filter 34603



ABEK1 Combination filter 34604



A2P3 Gas and dust filter 34607



36500N. Eurmask Din

Class 2 half mask to fit 1 filter.
Very light: weighs only 115 g

- Highly heat resistant
- Adequate fire or smoke
- Splash resistant

Attachable filters

CLASS 2 See page 79

EN140

1 UD





37590. Mayday

Emergency escape mask. Makes breathing easier for a few minutes

- Duration of the ventilator: 10 min
- Can only be used once
- Including ABEK filter

DIN 58647-7

1 UD



36601. Panarea

Class 2 silicone full face mask,
designed to fit 1 class 2 filter.



- Anti-impact y Anti-fogging
- 180º vision. UV protection
- Hypoallergenic
- Phonic diaphragm
- High and low temperature resistant

Attachable filters

CLASS 2 Ver página 79

EN136

EN166 1B

1 UD
12 UDS

35750. Panarea Twin

Silicone full face mask for 2 filters.
Can be fitted with VULCANO class 1 filters.



- Anti-fogging
- 180º vision
- Anti-impact
- UV protection
- Hypoallergenic
- Speech diaphragm
- High and low temperature resistant

Attachable filters

VULCANO VULCANO filters (see page 83)

EN136

EN166

1 UD
12 UDS



FILTERS

A	Organic gases and vapours with a boiling point above 65ºC
B	Acid gases and vapours, such as chlorine, hydrogen sulphide and hydrocyanic acid
E	Sulphur dioxide or hydrochloric acid
K	Ammonia and derivatives
AX	Certain organic vapours with a boiling point below 65ºC
NO-P3	Nitrogen oxide, dusts, fumes and mists
HG-P3	Mercury vapour and Particulates with mercury composition
CO	Carbon monoxide
P3	Particulates and dusts
REACTOR P3	Radioactive iodine, methyl iodine and radioactive Particles

EN141 Filters against gases and combined filters

EN143 Particulate filters

EN148 Standard threaded connector



CLASS 2 filters are available for all CLASS 2 masks.

	Plastic	Aluminium	
A2	36001 Gases and vapours	-	1 ud
B2	36002 Acid gases and vapours	-	1 ud
K2	36004 Ammonia	-	1 ud
A2B2	-	-	1 ud
B2P3	-	36009A Gases and dusts	1 ud
ABEK2	36007 Combined gases	-	1 ud
A2P3	36008 Gases and dusts	36008A Gases and dusts	1 ud
K2P3	36011 Ammonia and powders	36011A Ammonia and powders	1 ud
HGP3	36012 Mercury. Max. 50 h	36012A Mercury. Max. 50 h	1 ud
AB2P3	36013 Combined and powder	-	1 ud
ABEK2P3	36014 Combined and powder	36014A Combined and powder	1 ud
ABEK2P3HG	36015 - Mercury Combined, dust	-	1 ud
P3	36016 Powders	-	1 ud
AXP3	36019 Not reusable	-	1 ud
ABEK1HGNOP3	36020 Combined	-	ON REQUEST
ABEK1NOP3	-	36020A Combined	ON REQUEST

Filter selection guide

Selection guide

A
Acetaldehyde AX
Acetic acid A
Acetone AX
A-Butyl acetate A
Ethyl acetate/vinyl acetate A
Acetonitrile A
Acetylene Air supply
Banana oil A
Acetylsalicylic acid (aspirin) P3
Acids (concentrated fuming) E-P3
Hydrofluoric acid E
Butyric acid A-P3
Chlorosulphonic acid B-P3
Acrolein (2-propenal) AX
Acryaldehyde AX
Butyl acrylate A
Acrylic acid-esters A
Battery acid E
Boric acid E-P3
Carbolic acid A-P3
Hydrochloric acid E
Formic acid E-P3
Nitric acid NO
Picric acid P3
Perchloric acid B-P3
Sulphuric acid E-P3
Acrylonitrile A-P3
Turpentine A-P3
Alcohol A
Propyl alcohol (propanol) A
Diacetone alcohol A
Isopropyl alcohol A
Aldehydes AX
Allyl alcohol A
Ethyl alcohol (ethanol) A
Furfuryl alcohol A-P3
Butyl alcohols (butanols) A
Methyl alcohol AX
Allylamine BE
Coal tar, pitch, benzene-soluble volatiles A-P3
in benzene A-P3
A Petroleum tar A (A-P3 aerosol risks)
Aluminium, metal, oxides P3
Maleic anhydride A-P3
Acetic anhydride A
Asbestos P3
Amines B
2-Aminoethanol A
Ammonia K
Acetic ammonia A
Aqueous ammonia K
Amosite P3
Amyl acetate A
Acetic anhydride A
Aniline A-P3
Arsenic and inorganic compounds P3
Arsine B
Asbestos P3
Petroleum asphalt, fumes A-P3
Sulphur, compounds (calcining) E-P3

B
Benzene A
Benzopyrene A
Benzyl bromide A-P3
Beryllium P3
Sodium bisulphite E-P3
Borax P3
Potassium bromate P3
Bromine B
2-Bromo-2-Chloro-1,1,1-Trifluoroethane AX
Bromoform A
Bromomethane AX
Ethyl bromide Air supply
Hydrogen bromide B-P3
Vinyl bromide A
Methyl bromide AX
Butan-2-ol A
n-Butane AX
1-Butanol A
2-Butanone A
2-Butoxyethanol A
Butylglycol A
Butylamine K

C
Elemental cadmium and compounds P3
Calcium carbonate P3
Camphor A-P3
Kaolin, respirable fraction P3
Ketenes Air supply
Ketones A
Black carbon P3
Coal, anthracite P3
Cellulose P3
Acetone cyanohydrin A-P3
Potassium cyanide P3
Sodium cyanide P3
Hydrogen cyanide E
Zirconium and compounds P3
Chlorobromomethane AX
Allyl chloride (3-chloride-1 propen) AX
Chlorine B
Chlorobenzene A
Chloroethane AX
Chloromethane Air supply
Chloroform AX
Chloropicrin A
Chloroprene AX
Chlorotoluene A-P3
Ammonium chloride, fumes K-P3
Aluminium chloride B-P3
Hydrogen chloride E
Benzene chloride A-B-P3
Benzyl chloride A-P3
Benzoyl chloride A
Zinc chloride, fume P3
Sulphuryl chloride B
Ethylene chloride A
Methylene chloride AX
Vinyl chloride AX
Diesel fuel A
Chromium P3
Chromium, powdered metal A
Lead chromate P3
Chrysotile P3
Elemental cobalt and inorganic comp. P3
Copper P3
Barium compounds P3
Aluminium compounds P3
Rhodium compounds P3
Mercury compounds Hg-P3
Creosote A-P3
Cresols A
Crocidolite P3
Crotonaldehyde A
Cyanogen chloride B
Zinc chloride P3
Vinylidene chloride AX
Zinc chromates P3
Cyclohexane A
Cyclohexanol A
Cyclohexanone A
Quartz, silica CRYSTALIN Respirable fraction P3

D
DD (desmodur-desmophen) products A-P3
DDT powder P3
Decahydrate P3
Diazinon A-P3
1,2-Dibromoethane A
1,2-Dichloroethane A
1,2-Dichloroethylene AX
Ethylene dichloride A
Propylene dichloride A
Dichloromethane AX
Glycol dinitrate Air Supply
Solvents A
Sulphur dioxide B
1,2-Dichloropropane A
Diethylamine K
Diethylaminoethanol A
Diethyl ether A
Diphenyl A-P3
Sulphur dioxide E
Carbon dioxide Air supply
Diethylene Dioxide Air supply
Chlorine dioxide B
Titanium dioxide P3
Dimethylformamide (DMF) A
Dimethylhydrazine Air supply
Dimethyl aldehyde Air supply
Dimethylamine Air supply
Dimethylpropane AX
Dimethylsulphate A
1,4-Dioxane A
Carbon disulphide A

E
Endrin A-P3
Epichlorohydrin A-P3
Epoxyethane Air supply
Epoxy-butane A
Ethanol A
Ethanolamine A
Ethers AX
Diethylene ether Air supply
Ethylamine K
Ethylacetate A
Ethylacrylate A
Allyl glycidyl ether (AGE) A
Ethylbenzene A
Ethylbutylketone A
Ethylether A
Emeryl, powder P3
White spirit A
Stybin B-P3
Styrene A
Tin, organic comp. A-P3
Acid ethyl ester A
Esters AX
Styrene A

*** This selection guide includes a list of products for which adequate protection is indicated in most cases. However, it should be used as a*
However, it should be used as a complement to the risk assessment for each case.

F
Phenol A
Phenylhydrazine A
Glass fibre, powder P3
Artificial or synthetic fibres P3
Ceramic fibres P3
Plant protection products AP2
Fluorine Air supply
Formaldehyde (formalin) B-P3
Ethyl formate AX
Phosgene B
Phosphine or phosphine ABEK
Phosphorus (yellow) P3
Fuel A (or AP aerosol risks)
Furfural A
Furaldehyde A
Sodium fluoroacetate P3
Calcium fluoride P3
Inorganic fluorides P3

G
Liquefied Petroleum Gas (LPG) Air Supply
Gasoline A
Gas oil A (A-P3 Aerosol hazards)
Acid gases EB
Silica gel, amorphous silica P3
Glycerine, mist P3
Glycol Air supply

H
Halothane Air supply
Hydrogen halide B-P3
Sodium hydroxide P3
Halogenated hydrocarbons AX
Magnesium oxide fumes P3
Lead fumes P3
Iron oxide fumes P3
Metal fumes P3
Nitrous fumes NO
Welding fumes P3
Halogens B
Hexachlorocyclohexane A-P3
Heptane A
Herbicides (commonly used) B, P3
Hexane Air supply
Hexanone A
Sulphur Hexafluoride Air supply
2-Hexanone Air supply
Hexone A
Aliphatic hydrocarbons A-P3
Hydrazine K-P3
Hydrocarbons A
Calcium hydroxide P3
Caesium hydroxide P3
Lithium hydroxide P3
Potassium hydroxide P3
Sodium hydroxide P3
Sodium hypochlorite E-P3
Aluminium oxide fumes P3
General welding fumes P3
n-Heptane A

I
Insecticides A-P3
Ithrium P3
Isocyanates (organic) A-B
Isopropylether A

L
Mineral wool P3
Legionella pneumophila P3
Household bleach E-P3

M
Softwoods P3
Hardwoods P3
Wood, powder P3
Manganese, metal fume P3
Marble P3
Mercury, vapour Hg-P3
Mercaptans B
Sodium metabisulphite E-P3
Methyl methacrylate A
Methylalcohol (methanol) AX
Methyl chloroform A
Methylacetate AX
Methyl ethyl ketone (MEC) A
Methylisobutylketone (MIBK) A
Methylamine K
Methylcyclohexane Air Supply
Methylcyclohexanol Air supply
Methylcyclohexanone Air supply
Methylpropane AX
Methomyl E-P3
Methoxypropylamine K
Molybdenum P3
Monochloro-dimethyl ether AX
Carbon monoxide CO
Morpholine A

N
Naphthalene A-P3
Nicotine A-P3
Nickel (insoluble comp.) P3
Nickel carbonyl Air supply
Nickel tetracarbonyl CO-P3
Nitrobenzene A
Nitrocompounds (organic) A
Nitroglycerin Air supply
Nitromethane Air supply
Nitrotoluene Air supply
Nitrocompounds (organic) A

O
Octane A
1-Octanol A
Carbon oxysulphide B
Diethyl oxide A
Ethylene oxide (T-gas) AX
Calcium oxide P3
Chromium oxide P3
Lithium oxide P3
Zinc oxide, fume P3
Zinc oxide, dust P3
Nitrogen oxides NO
Propylene oxide AX
Ozone Reactor Hg P3

P
Paints, spray paints, vapours A-P3
Pentachloroethane A
Pentachlorophenol A-P3
Iron pentacarbonyl CO-P3
Phosphorus pentachloride E-P3
Pentanol A
Vanadium pentoxide P3
Perchloroethylene A
Perlite P3
Pesticides A-P3
Petroleum A
Powder P3
Polybiphenyl polychlorinate A-P3
Polyacrylate A-P3
Pyridine A-P3
Silver (soluble comp.) P3
Lead, metal and inorganic comp. P3

Q
Forffin A-P3

R
Resins B
Rhodium metal and smoke P3

S
Iron salts, soluble P3
Salfuran (hydrochloric acid) E
Silica, amorphous P3
Calcium silicate P3
Caustic soda P3
Hydrogen selenide B-P3
Cadmium sulphide P3
Hydrogen sulphide B

T
1,1,1,1,1-Tetrachloroethane A
Tetrachloroethylene A
Tetrachloromethane A
Carbon tetrachloride A
Tetrahydrofuran A
T-gas (ethylene oxide) AX
Toluene A
Tribomomethane A
Trichloroethane (TCA) A
Trichloroethylene (Tri) A
Trichloromethane AX
Phosphorus trichloride B-P3
Trimethylamine K
Triphenylphosphate A-P3
Trimethylbenzene A
Trimethylphosphate A-P3
Glyceryl trinitrate Air supply
Trinitrotoluene (TNT) A-P3
Arsenic trioxide P3
Sulphur trioxide P3
Turpentine A
Tungsten P3

U
Uranium, compounds P3
Urethane (INN) A-P3

V
Mercury vapour Hg-P3
Vapours, organic solvents A, AX
Venylbenzene A
Vinituloene A
Glass, fibre or powder P3

W
Warfarin P3

X
Xylene A

Y
Gypsum P3
Iodine Air supply
Iodine (radioactive) P3 Reactor
Iodomethane AX
Iodomethane (radioactive) P3 reactor

Z
Zyklon (hydrogen cyanide with irritant) B



37354. Euromask Uno

Half-mask made of rubber, polypropylene and silicone, for 1 filter.

- Very light weight: 115 g
- Extremely smooth edges
- Excellent watertightness
- Perfect fit to the face

Attachable filters

CLASS 1 See right page

EN140

1 UD
16 UDS



37400. Euromask Dos

Rubber, polypropylene and silicone half-mask, for 2 filters

- Very light weight: 120 g
- Extremely smooth edges
- Excellent watertightness
- Perfect fit to the face

Attachable filters

CLASS 1 See right page

EN140

1 UD
16 UDS



37400-P3. Euromask con FILTERs P3

Half mask with exhalation valve

- Includes 2 P3 filters
- Extremely smooth edges
- Perfect fit to the face
- Head harness

Attachable filters

CLASS 1 See right page

EN140

1 UD
16 UDS

34500-N. Vulcano

Non-allergenic elastomer half-mask CLASS 1, for two CLASS 1 filters

- Very light weight: only 90 g
- Reinforced in the middle
- Excellent field of vision
- Perfect fit to the face





Attachable filters

CLASS 1

See below

EN140

1 UD
10 UDS



34500-KIT. Kit Vulcano

Vulcan Mask Kit with two filters
A2P3 included



Available filters Vulcano Series

P3	Dust filter 34505	6 UDS 108 UDS
A1	Gas filter 34501	2 UDS 8 UDS
A1P3	Combination filter 34502 Gases and dusts	4 UDS 72 UDS
ABEK1	Combination filter 34504	6 UDS 108 UDS
ABEK1P3	Combination filter 34503	4 UDS 72 UDS
A2P3	Combination filter 34507	4 UDS 72 UDS
SOPORTE	Filter holder P2 34515	1 UDS 18 UDS
CARCASA	Filter housing P2 34516	1 UDS 18 UDS



Available filters Euromask Series

P3	Dust filter 37401	2 UDS 8 UDS
A1	Gas filter 37402	2 UDS 8 UDS
A1P2	Combination filter 37403 Gases and dusts	2 UDS 8 UDS
ABEK1	Combination filter 37404	2 UDS 8 UDS
PREFILTERS	Pre-filter kit 37409	2 UDS 8 UDS



elipse

Range of masks made of medical grade material, available with or without goggles. Certified against irritation according to ISO 10993.

The entire range includes filters.

- 99.97% maximum efficiency filters
- Of TPE
- Extremely comfortable, ultra-compact and lightweight
- Hypoallergenic
- Multiple applications

+ SERIES

Available filters ELIPSE SERIES

	P3	33316 Dust, Particulates and Asbestos	1 pack (2 uds)	Valid for 33510, 33501, 33337
	P3 CARBÓN	33336 Anti-odour, anti-dust, anti-Particulate and anti-asbestos activated carbon	1 pack (2 uds)	
	A1P3	33317 Solvents, dust and Particulates	1 pack (2 uds)	Valid for 33517, 33506, 33526, 33516
	A2P3	33313 Solvents, dust and Particulates	1 pack (2 uds)	
	ABE1P3	33314 Organic and inorganic gases and vapours, sulphur and sulphur derivatives, formaldehyde, dust and particulates.	1 pack (2 uds)	
	A2P3	33307 Solvents, dust and Particles.	1 pack (2 uds)	Compatible with each other. Valid for 33516, 33517, 33507, 33508, 33509
	ABEK1	33318 Organic and inorganic gases and vapours, sulphur, ammonia and derivatives.	1 pack (2 uds)	
	ABEK1P3	Organic and inorganic gases and vapours, sulphur, ammonia and derivatives, dust and Particulates.	1 pack (2 uds)	



33510. Integra P3

Ultra compact filter for dust, Particles and asbestos.



33516. Integra A1P3

Compact filter for solvents, dust and Particles.



33519. Integra ABEK1P3

Organic and inorganic gases and vapours, sulphur, ammonia and derivatives, dust and Particulates.



33518. Integra ABEK1

Organic and inorganic gases and vapours, sulphur, ammonia and derivatives.



33517. Integra A2P3

Compact high capacity filter for solvents, dust and Particles.



33501. Elipse P3

Ulra compact filter for dust, Particles and asbestos.



33506. Elipse A1P3

Solvents, dust and Particles.



33337. Elipse P3-Carbón

Ultra compact anti-odour filter for dust, Particles and asbestos.



33507. Elipse A2P3

High capacity filter for solvents, dust and Particles.



33508. Elipse ABEK1

Organic and inorganic gases and vapours, sulphur, ammonia and derivatives.



33509. Elipse ABEK1P3

Organic and inorganic gases and vapours, sulphur, ammonia and derivatives, dust and Particulates.



33526. Elipse ABE1P3

Compact filter for organic and inorganic gases and vapours, sulphur and sulphur derivatives, formaldehyde, dust and Particles.

Breathing equipment



30050. Commander II

CHEMICAL

Helmet with the possibility of air supply for abrasive spraying. Designed for sandblasting work. Suitable for hostile environments. Protects shoulders, back and chest against chemical hazards.

EN14594

+ SPARE PARTS





70670. Airface

Breathing apFortus and screen for grinding, with belt and charger. Autonomy 9-10 h.
Low battery alarm.

EN12941 TH2 PSL
EN166 1B

+ SPARE PARTS



* ALL EQUIPMENT INCLUDES A CARRYING BAG



70680. Airshell

Welding and breathing apFortus with welding screen, Transparent screen, belt and charger. Autonomy 9-10 h.
Low battery alarm. Automatic filter 1/1/1/2 photosensitive 4-9/13.

EN12941 TH2 PRSL
EN179
EN175 1F

+ SPARE PARTS



70693. Airface Airkube

Air supply regulator suitable for confined spaces with air flow rate adjustment: 170 l/m. With Transparent anti-shock face shield. Adjustable harness and longitudinal adjustment for welders equipped with goggles with corrective lenses.

EN14594 EN12021



70692. Airshell Airkube

Air supply regulator suitable for confined spaces with air flow rate adjustment: 170 l/m. With 5-9/13 welding shield, four arc sensors. Filter 1/1/1/2. DIN5 side filters.

EN14594 EN12021

Aeris Confort 2



70640. Aeris Confort 2

Breathing apFortus with integrated pressure gauge end-of-operation beep alarm, lifeline attachment point, flexible, ergonomic, non-metallic back plate and washable harness.

EN 137 EN 136



70641 Botella vacía 6L

Breathing apFortus cylinder AERIS CONForT 2 Ref. 70640 with capacity up to 6L for cylindrical angle valve.

EN 12245
EN 144-1
EN 144-2

Bio-s-cape



70645 Bio-s-cape

Compressed air emergency breathing apFortus, designed to provide easy donning and optimum respiratory protection. The equipment is contained in a carry bag, which when opened, automatically activates the supply of breathing air from the cylinder.

EN 1146

+



70646 Bio-s-cape armario

Storage cabinet for Bio-s-cape breathing apFortus Ref. 70645

Serie GVS

Thermal protection for heavy industry

- Lightweight product. Reduces fatigue effect
- Free range of movement
- 23% lighter than other brands
- Reduces neck pain and tension
- Ergonomic and practical
- High protection against pollutants
- Replacement visors available







70800. Kit PX5

Motorised, P3

*THE GAS FILTER MUST BE PURCHASED SEFORTELY.

70810. Kit PX5 Gases

Motorised, Combined gases

SNR 21



70840. PanSIZE soldar Z-4

Breathing apFortus with powered or supplied air supply

+Automatic flame-retardant welding screen



70850. Helmet and respirator

With Transparent visor



+ SPARE PARTS



70860. Nova 3

Sandblasting head piece



70870. Kit Astro

For sandblasting



70891. Regulador C40

Temperature regulator



70890. Radex

Filtration stage




70892. Manguera 15 m

CEJN connection

HEARING PROTECTION



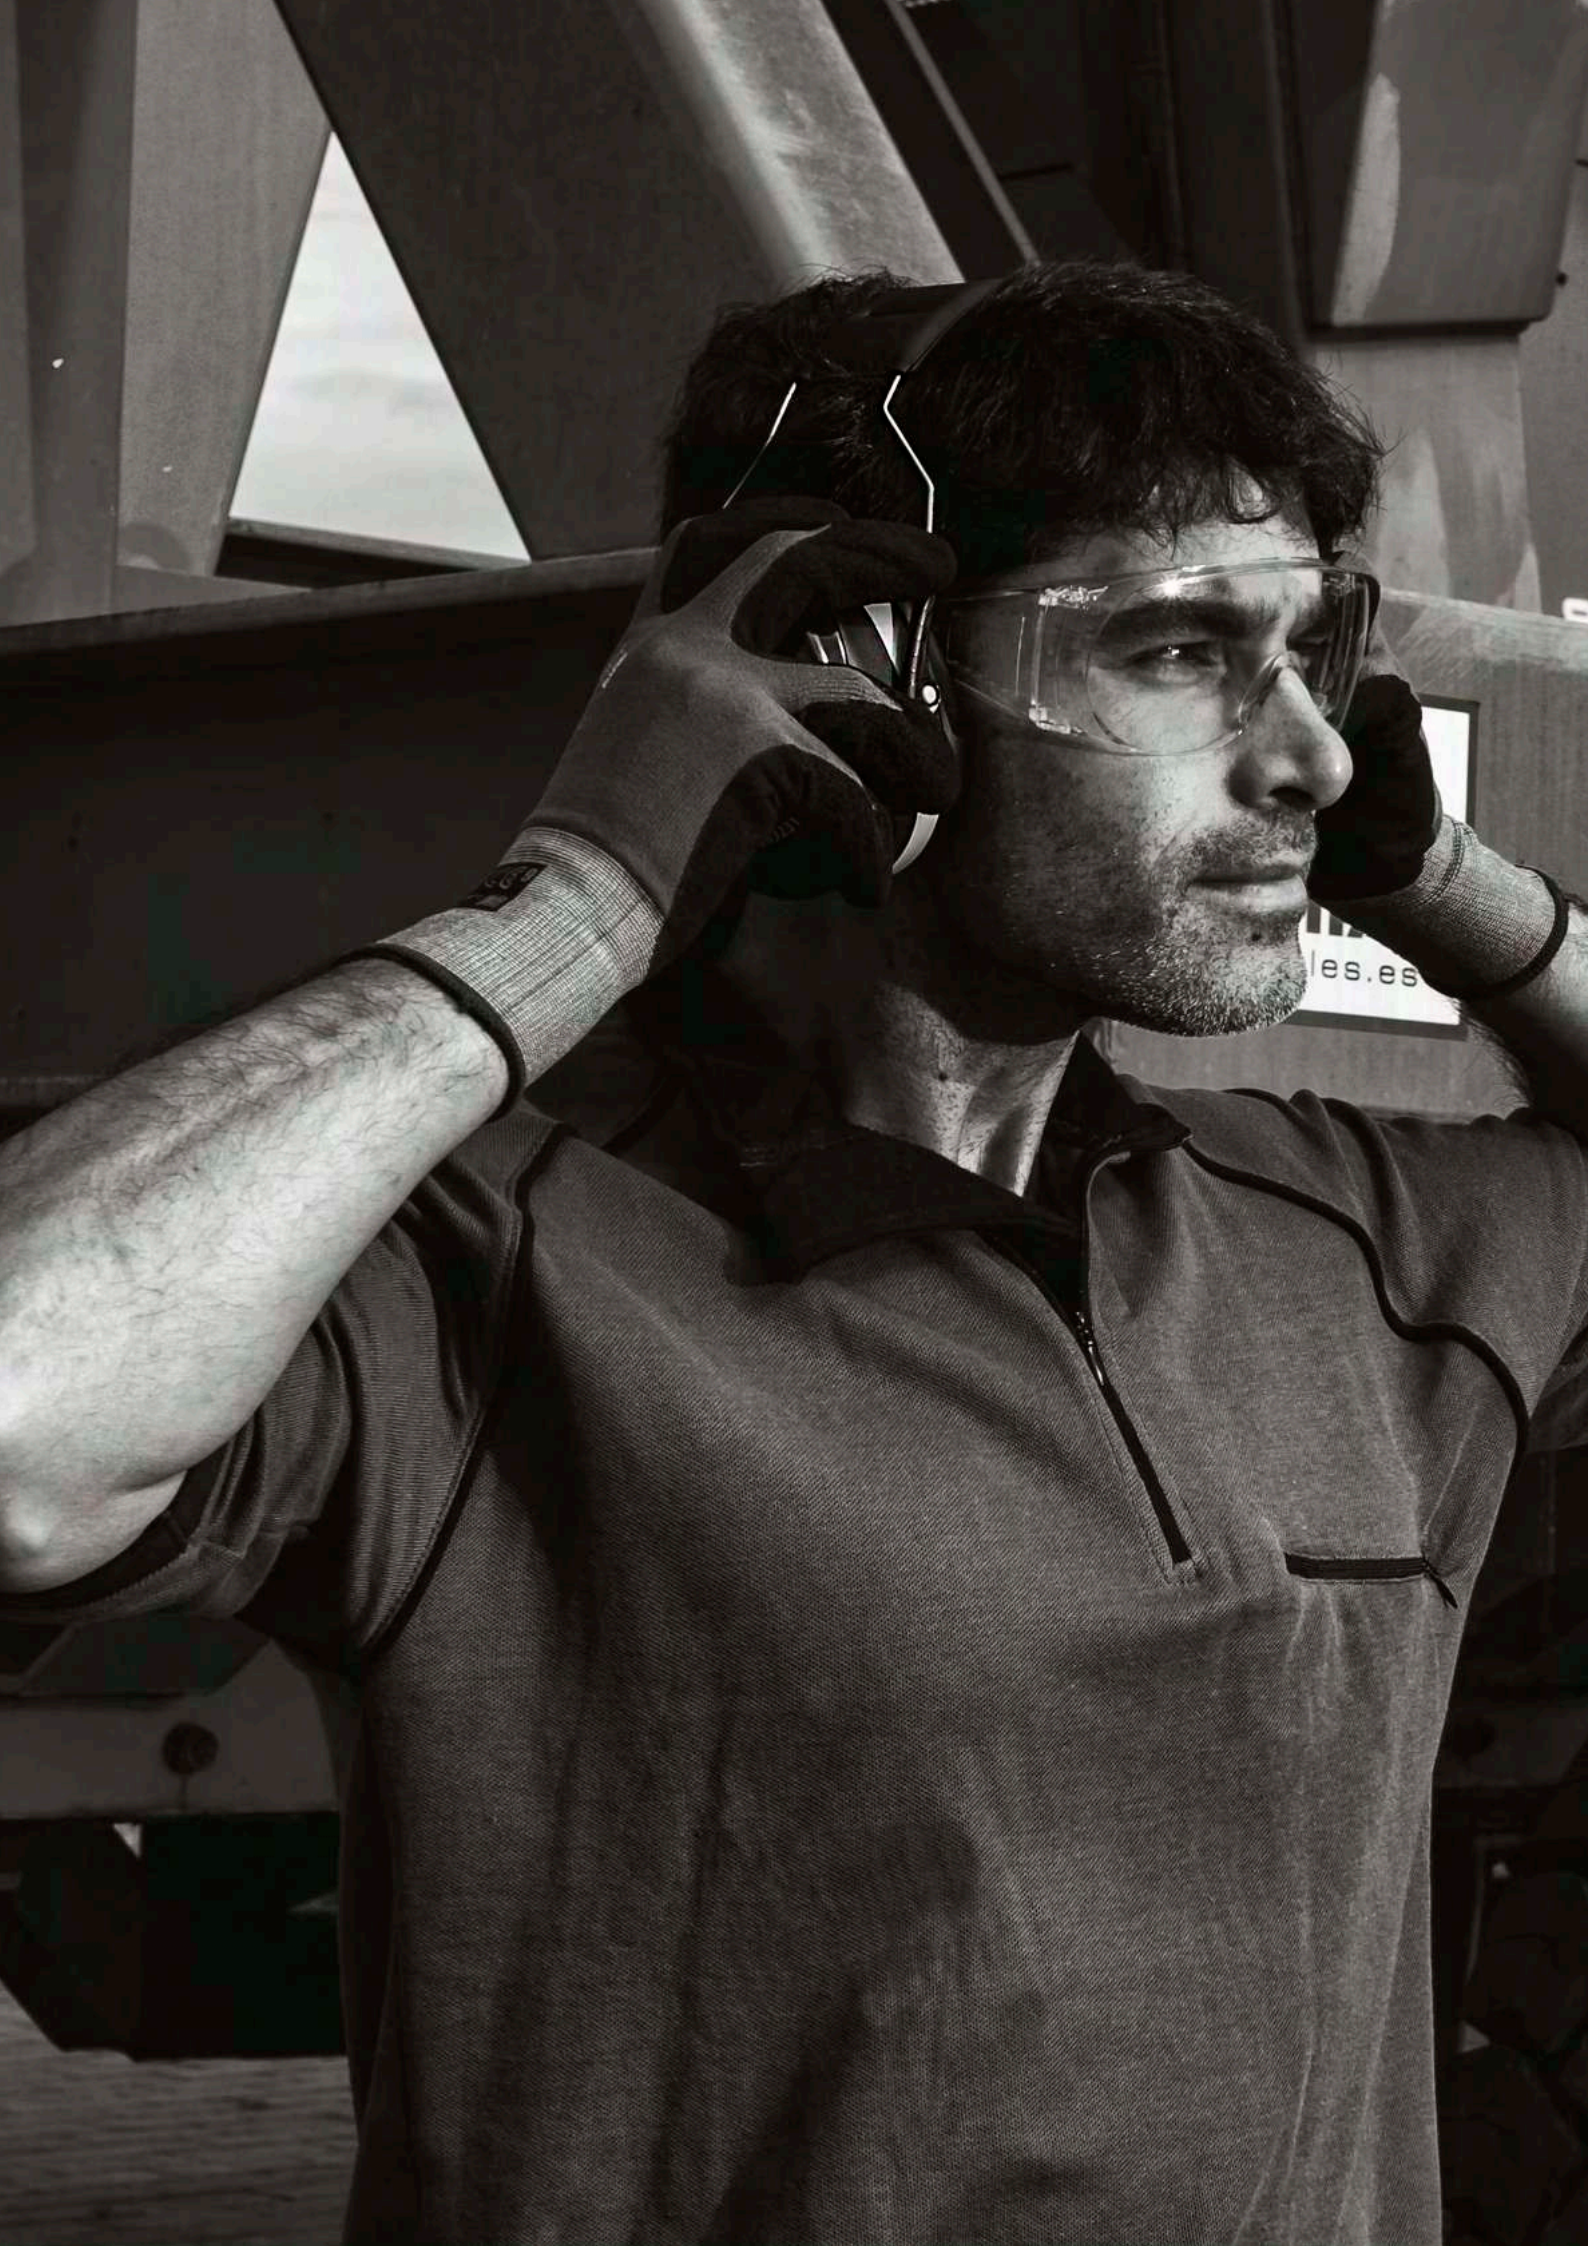

How to choose a hearing protector?

Know the level of attenuation I need and which PPE to combine it with



Protejamos nuestros oídos

Occupational hearing loss is the most common occupational injury

Knowing the values

SNR	It is an attenuation value that is often sufficient to assess the protection we need in a hearing protector.
NRR	A dielectric hearing protector that has no metal components.
HML	This is the specific protection offered by hearing protection products. It is measured in three different frequency ranges H high M medium and L low.
APV	It is the value obtained by subtracting the deviation obtained in different tests from the mean attenuation value.

To know the standards of standardisation

EN352-1	Earmuffs
EN352-3	Earmuffs attachable to helmets
EN352-4	Level-dependent earmuffs equipped with an electromagnetic resetting circuit
EN352-4	Level slope earmuffs equipped with an electromagnetic level reset circuit

Hearing protectors

Valid for long periods of use

metal free



82600. Soneer

Very light and comfortable hearing aid.

- Dielectric
- Metal-free

EN352-1

10 UDS
60 UDS



83000. Whisper

Hearing aid with adjustable headband.

- Injection moulding
- Made of ABS and PVC

EN352-1

10 UDS
60 UDS



83100. Leightning L1N

High-tech headset

- Back of the neck
- Including strap

EN352-1

1 UD
20 UDS



SNR 30 dB



83220. Profy

Very lightweight foldable hearing aid

- Easy to store
- From ABS

EN352-1

10 UDS
60 UDS

SNR 34 dB



83103. Verishield L3

Ear cushioning

- High attenuation
- ABS capsules

EN352-1

1 UD
20 UDS

metal free

SNR 34 dB



82200N. Big Drummer

High-performance hearing aid

- Dielectric
- Metal free

EN352-1

1 UD
20 UDS

metal free

SNR 29 dB



83229. Gunner

Multi-position hearing aid.

- Dielectric
- Metal-free

EN352-1

1 UD
20 UDS

SNR 34 dB



83231. Drakkar

Dual housing technology

- Minimises echo
- Acero inox

EN352-1

1 UD
20 UDS

SNR 37 dB



82140. Vary Soni

Multifunctional hearing aid

- External volume adjustment
- Ideal for environments with high variation in noise levels

EN352-1
EN352-4
EN50022 Class B
EN61000

1 UD
30 UDS



83401. Verishield HV

Very lightweight, high visibility hearing protector. Ideal for workers wearing hearing aids.

EN352-1

- Anti-impact B
- UV protection
- Soft front sweatband

1 UDS
10 UDS



83101. Verishield

Maximum comfort hearing aid.

- Metal band
- With injected vinyl

EN352-1

1 UD
20 UDS



82100. Sync wireless Bluetooth

Hearing aid with Bluetooth® connectivity

- Rechargeable battery
- Approx. 16 hours of transmission
- Recharge in 4 hours
- Includes USB cable and wall charger

1 UD
20 UDS

EN352-4 (A1)
EN 352-8



82000. Sync Stereo

For using devices

- Including 3.5 mm cable
- Sync's Volume Management Technology
- No battery, buttons or switches required
- Connects to most MP3 players MP3 players, mobile phones and other devices devices

EN352-1
EN352-6

1 UD
20 UDS

Attachable protectors




82805. Verishield

Helmet-mounted hearing aid

EN 352-3

- Includes different adapters
- Very light weight 171 g

1 UD
20 UDS

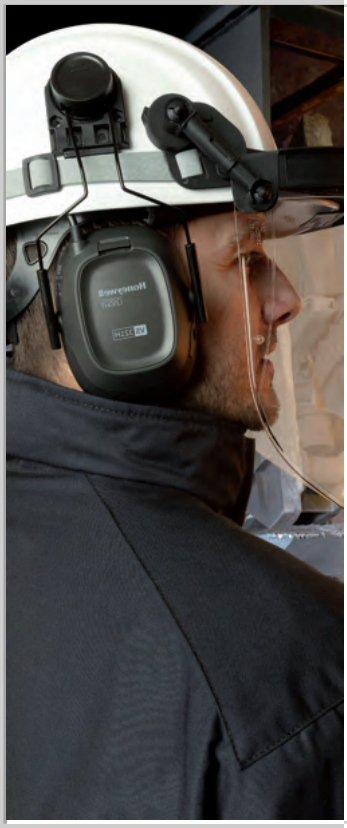

Compatible helmets

82805 FITS THE FOLLOWING HELMETS:

Available in different colours



80610. SP



80520. SR



80620. SV



80540. AR



80530. ER



80640



80660



82305N. Sonico Set

Helmet-mounted hearing aid

EN352-3

- Folding
- Height adjustable

1 UD
20 UDS



SNR
25,9 dB

Compatible helmets

+

82805 FITS THE FOLLOWING HELMETS:

Available in different colours



80610. SP | 80520. SR | 80620. SV | 80540. AR | 80530. ER

Earplugs

SNR 24,5 dB



82755. Track Fit little box

REUSABLE triple flange cap

- With cord
- 8-12 mm

EN352-2

100 pairs
400 pairs

SNR 24,5 dB



82750. Track fit bolsita

REUSABLE triple flange cap

- With cord
- 8-12 mm

EN352-2

100 pairs
400 pairs

SNR 32 dB



82745. Detect Fit

REUSABLE triple flange cap

- With cord
- 8-12 mm

EN352-2

150 pairs
3000 pairs

SNR 32 dB



82753. Mark Fit

REUSABLE plug with cord

- Detachable
- Of TPE

EN352-2

BOXES
50 Pairs

SNR 33 dB



82751. Bilsom

Disposable plug without cord

- PU foam
- Loud noises

EN352-2

BOXES
100 Pairs

SNR 33 dB



82752. Bilsom With cord

Disposable plug with cord

- PU foam
- Loud noises

EN352-2

BOXES
100 Pairs

SNR 37 dB



82430. Pinkie With cord

Disposable plug With cord

- PU foam
- High attenuation

EN352-2

INDIVIDUAL BAG
BOXES 200 PAIR

SNR 37 dB



82440. Pinkie without cord

Disposable plug without cord

- PU foam
- High attenuation

EN352-2

INDIVIDUAL BAG
BOXES 200 PAIR

PRESENTATION



82745. Box of 150 pair



82430/82440. BOXES of 400 pair



82751. BOXES de 200 PAIR



82753. Box of 50 pair



Dispensers

SNR 37 dB



82550. Dispenser

Pinkie Cap Dispenser

- From PU
- Includes 250 pairs

EN352-2

SNR 37 dB



82555. Pinkie Bag

SPAIRe bag for dispenser

- Without cord
- 250 pairs

EN352-2

Bands



82700. Light Band


Hearing protector with headband

- Moisture resistant
- Disposable

EN352-2

1 UD
15 UDS

Replacement earplug 82701

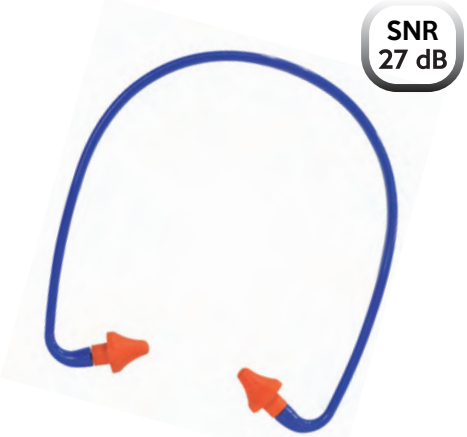

82715. Smart Band

Hearing protector with headband

- Made of PP and PU
- Disposable

EN352-2

1 UD
50 UDS

Replacement earplug 82716



82710. Percap

Hearing protector with headband

- Foldable
- Disposable

EN352-2
EN13819

1 UD
10 UDS

Replacement earplug 82711

HEAD PROTECTION




TROMSØ

THE LIGHTEST OF THE ENTIRE RANGE



80630. Airex FR Series

Very light ABS helmet, ventilated, with dorsal tightening thread

- 6-point textile suspension
- Front stripping band
- Possibility of attaching your own chinstrap
- Weight: 360 g
- With aeration holes

EN397

1 UDS
40 UDS



Available colours

- White
- Yellow
- Royal blue
- Red
- Navy blue

	Accessories	Reference
	Chinstrap	80052
	Carrier bracket for attaching other EPIS	80630-CA





EN397 / SAFETOP SERIES

SP, SR y SV

1 UDS
40 UDS

Safetop series helmets for industry, certified according to EN397 standard. Available with or without back thread, or with short visor. All with front stripping band and attachable to other EPIS or chinstrap.



SP SERIES 80610



SR SERIES 80520

01 02 03 04



SV SERIES 80620



80053

2 PTS

4 PTS



80054

ATTACHABLE CHINSTRAPS

01. SP SERIES 80610. Very light ABS helmet with 4-point plastic suspension. Weight 397 g.
02. SR SERIES 80520. ABS helmet with dorsal adjustment thread. 4-point textile suspension. Weight 400 g. **03. SV SERIES 80620** Ventilated ABS helmet with short visor. Includes dorsal adjustment screw. Weight 388 g. **04. CHINSTRAPS** 80053 (2 points) and 80054 (4 points)



80530. ER Series

HDPE helmet with 4-point chinstrap included and dorsal adjustment screw.

- 6-point textile suspension
- Front stripping band
- Includes chinstrap
- Acoplable a otros EPIS
- Weight: 450 g

EN397

Available colours

1 UDS
20 UDS

REACH COMPLIANT



80540. AR Series

Very light ABS helmet certified for electrical hazards, LD and -30ºC. With dorsal adjustment thread.

- 6-point textile suspension
- Front stripping band
- 2-point chinstrap attachment possible
- Electrical properties VDE 1000V Class 0
- Lateral deformation resistance (LD)
- Weight: 406 g

EN397 EN50365

Available colours

1 UDS
20 UDS

REACH COMPLIANT

80640. Montana

POLYCARBONATE helmet for rope access work with short visor. Includes flip-up goggle and chinstrap.

- Textile suspension
- Front stripping band
- Includes chinstrap
- Can be combined with other EPIS
- Lamp can be fixed to it
- Certified for temperatures -30ºC
- Weight: 400 g
- Operable ventilation window

EN397

Available colours

1 UDS
20 UDS

+ SPARE PARTS



POSSIBILITY OF ATTACHING SMOKED GOGGLES (REF. 80639)

80640-E. Montana dieléctrico

Helmet made of POLYCARBONATE for rope access work with short visor. Includes flip-up goggle and chinstrap.

Certified for electrical risk up to 1000V

- Textile suspension
- Front stripping band
- Includes chinstrap
- Can be combined with other EPIS
- Lamp can be fixed to it
- Certified for temperatures -30ºC
- Weight: 400 g
- Operable ventilation window

EN397 EN50365

Available colours

1 UDS
20 UDS

+ SPARE PARTS





80660. Climber

ABS helmet with chinstrap, certified for electrical hazards and -30ºC. Without visor

- 6-point textile suspension
- Front stripping band
- Includes 4-point chinstrap
- Electrical properties VDE 1000V Class 0
- Ideal for electrical work or work at heights
- Can be fitted with a lamp
- Weight: 480 g

EN397 EN50365

Available colours

1 UDS
20 UDS

REACH COMPLIANT

+ SPARE PARTS





Anti-bump caps

Certified to EN812 standard, they are designed to protect against fixed obstacles. Breathable and lightweight.

1 UDS
12 uds



80470. Blue
80471. Black

01



02

80473



03



80475

EN812 / Impact caps and visors

Anti-impact helmet

Certified according to EN812 standard. Lightweight helmet that protects against impacts. Made of high density polyethylene. Weight: 175 grams. Front harness with sliding band.

1 UDS
50 uds



80560-White

01



80560-Blue

02

03



80560-Yellow

04



80560-Red

SPARE PARTS

SAFETY CLOTHING





Technical clothing
Arapro

EN ISO 11612
EN ISO 11611
EN1149-5
IEC 61482-2
EN17353
EN13688



134. Arapro Coverall

Front zip and Velcro fastening

M L XL 2XL 3XL

1 UD
10 UDS

EXTRA LIGHT FLEXIBLE BREATHABLE WASHABLE

Flame retardant and antistatic technical clothing

- 260 GSM
- High visibility reflective tapes
- Composition 99% cotton and 1% elastane
- Reinforced at stress points
- Knee pads can be attached to the coverall and trousers.
- Suitable for welding work

EN ISO 11612:2015 A1 B1 C1 E2 F1

EN ISO 11611:2015 Class 1 - A1

EN 1149-5:2018

EN 17353:2020

IEC 61482-2:2018 APC=1



Velcro and zip



135. Arapro Jacket

Front fastening with zip and Velcro

S M L XL 2XL 3XL

1 UD
10 UDS



136. Arapro trousers

Elasticated waistband

S M L XL 2XL 3XL

1 UD
10 UDS

Multiple pockets tool holder



CLOTHING


digiTX
BREMANN



Arapro PLUS

Multi-protection clothing
High visibility

- 260 GSM
- Certified against heat and flame
- Composition 99% cotton and 1% elastane
- Multiple tool pockets
- Valid against electric arc
- Protection against chemical risks
- Suitable for welding work


2047:2013
+ A1:2016


EN ISO
13688:2013


EN ISO
11612:2015


EN ISO
11611:2015


EN
61482-1-2:2014


EN
13034:2005
+A1:2009


EN
1149-5:2018


EN
14404:2004
+A1:2010

137. Multi-protection coverall

Front fastening with zip and Velcro

S M L XL 2XL 3XL

1 UD
10 UDS

138. Multi-protection jacket

Front fastening with zip and Velcro

S M L XL 2XL 3XL

1 UD
10 UDS

139. Multi-protection trousers

Front fastening with zip and Velcro

S M L XL 2XL 3XL

1 UD
10 UDS


EXTRA LIGHT


FLEXIBLE


BREATHABLE


WASHABLE

TROMSØ



Double velcro and zip fastening



Inside pocket







Multiple tool pockets



Pockets for knee pad inserts



Work trousers



252. Lemos

100% cotton Oxford weave

- Reinforced seams
- Kneepads in Cordura® fabric
- Loop tool holder
- Elasticated waistband

S M L XL 2XL 3XL

1 UD
10 UDS



168. Trives

100% stretch cotton

Grey-black
Royal-black

- Extra thick, Oxford weave
- Multi-pockets
- Loop tool holder
- Lightweight, soft and breathable

S M L XL 2XL 3XL

1 UD
10 UDS



158. Vigo

Two-tone multi-pocket trousers

- Double stitching
- 65% polyester 35% cotton
- Can be fitted with knee pads
- Elasticated waistband

S M L XL 2XL

1 UD
10 UDS



166. Grove

Reinforced multi-pocket trousers

- With extended protection
- 97% cotton 3% elastane
- Can be fitted with knee pads
- Very comfortable, elastic

S M L XL 2XL 3XL 4XL

1 UD
10 UDS

350G

STRETCH



164. Tharsis

100% cotton Stretch fabric

- Denim type with side pocket
- Elastic, very comfortable
- Rear pockets
- Extra heavy-duty

XS S M L XL 2XL 3XL 4XL

1 UD
10 UDS

200G

STRETCH



Grey-negro

Royal-negro

165. Venlo

Stretch multi-pocket trousers

- Elastic waistband
- 65% pol. 32% cotton and 3% lycra
- Can be fitted with knee pads
- Soft and breathable

S M L XL 2XL 3XL

1 UD
10 UDS



TROMSØ

200G

STRETCH



Grey-black

Royal-black

163. Torrox

Shorts in two colours

- Extra strong seams
- Multi-pockets
- Comfortable and lightweight
- 65% Polyester | 32% Cotton | 3% Lycra

XS S M L XL 2XL 3XL 4XL

1 UD
10 UDS

Work clothes

- 240 GSM
- Concealed snap fasteners
- Metal zip fasteners
- Reinforced seams
- Hidden fasteners and metal PAIRts



142. Arbo

Cotton jacket

S M L XL 2XL

1 UD
10 UDS



143. Orto

Cotton trousers

XS S M L XL 2XL 3XL

1 UD
10 UDS



149. Biville

Cotton shirt

S M L XL 2XL

1 UD
10 UDS



150. Berulfe

Grey-black dungarees

- Elasticated braces
- Quick connect ratchets
- 65% polyester 35% cotton
- Tool holder loop

M L XL 2XL

1 UD
10 UDS



141. Rodo

100% cotton sweatshirt

- Clasp fastener
- Concealed zip closure
- Pen opening
- Reinforced seams

S M L XL 2XL 3XL

1 UD
10 UDS

Work jackets

Sweatshirts and work jackets



154. Nendos

Classic two-tone jacket

- Pen opening
- Metal zip fastener
- Hook-and-loop fastener cuff
- 65% polyester 35% cotton

XS S M L XL 2XL

1 UD
10 UDS



161. Sober

Technical thermal sweatshirt

- Elastic waistband
- Elasticated cuffs
- Stretchy and skin-friendly fabric
- Zip up to the pockets

XS S M L XL 2XL

Grey

Navy blue

1 UD
10 UDS





190G

170. Sadiás

Two-tone technical work polo shirt

- Anti-sweat treatment
- Very light material
- Right-hand zipped pocket
- 50% polyester 50% cotton

S M L XL 2XL

Grey

Navy blue

1 UD
10 UDS



150G

160. Allariz

Technical work T-shirt

- Absorbs sweat and bad odour
- Soft and breathable material
- Very fast drying
- 100% polyester mesh

S M L XL 2XL

Grey

Navy blue

1 UD
10 UDS

Drying **fast**



1 UD
10 UDS

26100. Avia

Quickdry thermal vest with antibacterial function

XS S M L XL 2XL 3XL

Drying **fast**



1 UD
10 UDS

26200. Limia

Quickdry thermal pants with antibacterial function

XS S M L XL 2XL 3XL

PRESENTATION



Welding clothing




SAFETOP
SAFETOP



20110. Best Jacket

1 UD
10 UDS

Welding jacket Best quality
- Kevlar thread seams
- Bovine leather
- Denim fabric on collar with Velcro fastening.

M L XL 2XL 3XL

EN ISO 11611 (CLASS 2)



20100. Standard jacket

1 UD
10 UDS

Standard welding jacket
- Kevlar thread seams
- Denim fabric on collar with Velcro fastening.

S M L XL 2XL 3XL

EN ISO 11611 (CLASS 2)



20090. Leather trousers

1 UD
10 UDS

Best welding trousers.
- Kevlar thread seams
- Velcro fastener

M L XL







20230. Apron Best 90x150 cm

Welding apron long

Calidad Best

- In four pieces
- Strips sewn in kevlar thread
- Fast buckles

EN ISO 11611 (CLASS 2)

1 UD
10 UDS

20001. Blanket 1x1 m

Welding blanket

- Splash protection
- Minimal risks
- With fastening eyelets
- Ideal for protecting objects from welding projections

1 UD
10 UDS



1 UD
25 UDS

20210. Apron Best

High quality welder's apron.
- Quick release buckles
- Adjustable straps

EN ISO 11611 (CLASS 2)



1 UD
25 UDS

20220. Reinforced apron Best

Ventral reinforcement 57x30 cm
- Kevlar thread seams
- Weightr of the reinforced area: 2.30 mm

EN ISO 11611 (CLASS 2)





1 UD
25 UDS

20200. Standard apron

Standard welding apron.
- Quick release buckles
- Adjustable straps

EN ISO 11611 (CLASS 2)



1 UD
25 UDS

20290. Apron Best

Welding apron in 4 pieces.
- Sewn in Kevlar thread
- Rear cross strips

EN ISO 11611 (CLASS 2)

Welding accessories

EN ISO 11611 CLASS 2

1,9 MM



20490. Sleeves Best

Welder's sleeves one size fits all

- Sewn in kevlar thread
- Length: 65 cm
- Red straps crossed at the back

EN ISO 11611 (CLASS 2)

1 PAIR
25 Pairs

1,7 MM



20400. Sleeves Standard

Standard welding sleeves

- Elasticated cuffs
- Length: 63 cm
- Adjustable in the back

EN ISO 11611 (CLASS 2)

1 PAIR
25 Pairs

1,9 MM



20390. Gaiters Best

Gaiters with shin guards

- Shin and instep protection
- Length: 40 cm
- Double velcro fastening
- With reinforced shin guard

EN ISO 11611 (CLASS 2)

1 PAIR
25 Pairs



20300. Gaiters Standard

Welding gaiters

- Shin and instep protection
- Length: 30 cm
- Velcro side fastening

EN ISO 11611 (CLASS 2)

1 PAIR
25 Pairs



20450. Elbow sleeves

Welding sockets standard series

- Wrist to elbow protection
- Length: 42 cm
- Elastics on both sides

EN ISO 11611 (CLASS 2)

1 PAIR
25 Pairs

Disposable coveralls

How to choose the right garment?

Standards

PICTOGRAM	DESCRIPCIÓN	STANDARDS
	Chemical protection. Types 3, 4, 5 and 6	EN14605 Types 3 and 4 EN13982-1 Type 6 EN13034 Type 6
	Electrostatic properties	EN1149-5
	Protection against infectious agents	EN14126
	Protection against radioactive contamination	EN1073-2
	Heat and flame protection	EN ISO 14116

CAT III

-

+ INFO

Tipos 3, 4, 5 o 6





82G

1 UD
50 UDS

22260. SkinGuard-Ultimate

Disposable Coveralls Type 3, 4, 5 and 6

- Dust-tight
- Against chemicals and liquid splashes
- Elasticated cuffs, hood and ankles
- Against infectious agents, biological protection
- Antistatic, against radioactive Particles

M L XL 2XL 3XL

EN ISO 13688
EN14605
EN13982-1
EN13034
EN14126
EN1073-2
EN1149-5
EN14325



22250. SkinGuard-Weld

Disposable Coverall Type 5 and 6 FR

- Disposable Coverall Type 5 and 6 FR
- Against splashes of liquids and chemicals
- Elasticated cuffs, hood and ankles
- Flame-retardant, flame-retardant
- Antistatic, against radioactive Particles

XS S M L XL 2XL

EN ISO 13688 EN1073-2
EN13982 EN1149-5
EN13034
EN ISO 14116



21010 Prot-o-skin

Disposable coverall for minimal risk.

- Polypropylene elastic hood, sleeves and ankles
- Elasticated wrists, waist and ankles
- Stain and PAIRticle resistant
- Breathable
- Disposable

S M L XL 2XL



1 UD
25 UDS

22230. SkinGuard-Plus

Disposable coverall **Type 4, 5 and 6**

- Antistatic, PAIRticle-tight
- Against chemicals and splashes
- Chemical spray protection
- Protection against infectious agents
- Protection against body fluids
- Protection against radioactive contamination
- Elasticated cuffs, hood and ankles

M L XL 2XL

EN ISO 13688	EN14126
EN14605	EN1073-2
EN13982-1	EN1149-5
EN13034	EN14325



1 UD
25 UDS

22220. SkinGuard-Safe

Disposable coverall **Type 5 and 6**

- Antistatic, PAIRticle-tight
- Against chemicals and splashes
- Chemical spray protection
- Protection against infectious agents
- Protection against body fluids
- Protection against radioactive contamination
- Elasticated cuffs, hood and ankles

M L XL 2XL

EN ISO 13688	EN14126
EN13982-1	EN1073-2
EN13034	EN1149-5
	EN14325

Accessories



21035. Disposable apron

Made of polypropylene, 115x75 cm.

1 UD
100 UDS



21033. Disposable gown

Laboratory, 57x104 cm

1 UD
100 UDS



21032. Disposable hood

52x32 cm

1 UD
50 UDS



21034. Sleeve

Disposable

1 PAIR
25 Pairs



21015. Disposable cap

Disposable, made of polypropylene

1 PACK (100 UDS)
10 PACKS



21030. Non-slip shoe covers

Disposable, polypropylene

1 PACK (100 UDS)
10 PACKS



20250. PVC apron

Reusable, 110x70 cm

White
Yellow

1 UD
50 UDS



21971. Shoe covers reusable

With non-slip PVC sole

White
Red

1 PAIR







80420. Standard lumbar support

Elastic girdle with Velcro and straps

S M L XL 2XL

80421. Lumbar support PLUS

- Double elastic girdle
- Comfort Plus
- More elastic
- With extra lumbar support
- Double velcro fastening
- Braces

S M L XL 2XL





20578. Balaclava

In Thinsulate® acrylic fabric

1 UD
12 UDS





80501. Rody

PU foam kneepads

1 PAIR
12 Pairs



80511. ProfiPlus

Knee pads with Velcro and reinforcement

1 PAIR
12 Pairs



80514. Ligier-Pro

Knee pads with reinforcement and Velcro

1 PAIR
12 Pairs



80515. ProfiGrip

Professional knee pads with gel

1 PAIR
12 Pairs



80516. Pro 8

EVA foam knee pads

1 PAIR
12 Pairs

PRESENTATION



Chemmaster

Reusable range with multi-chemical resistance



24110. Buzo Chemmaster

Type 4B Reusable Full Suit

- Made of PVC and nylon. Waterproof
- Hood with elastic
- Double flap with snap button
- Elasticated wrists and ankles
- Welded seams

S M L XL 2XL

EN 14605/A1 Type 4



24105. Chemmaster Apron

Reusable full apron Type 4B

- Made of PVC and nylon. Waterproof
- Measurements 107x92 cm
- Ideal chemical handling
- Automatic buckle at the neck
- One size fits all

EN 14605/A1 Type 4



24120. Chemmaster Scuba Diving

Type 4B Reusable Scuba Diver

- Made of PVC and nylon. Waterproof
- Covers the shoulders and the back of the back.
- Ideal chemical handling
- POLYCARBONATE Visor
- One size fits all

EN 14605/A1 Type 4



24100. Chemmaster Sleeves

Elbow-length sleeves PVP

- Elasticated at both ends
- All seams welded
- Ideal chemical handling
- High mechanical strength
- 380 g/m2

EN 14605/A1 Type 4

VISOR 79046
APRON 20801
LEGGINGS 20802
SCREEN 79045



20800. CryoKit

Special For liquid nitrogen kit

It includes:

- Class A high impact face shield
- Apron 70x90 cm
- G645 gloves (see page XX)
- Gaiters
- Carrying case

* Parts can be purchased by separated, liquid gas protection

EN166 EN170 (Full screen)
1 A T 8 9 2C-1,2 (Visor)
EN420 EN388 EN511 (Gloves)


SAFETOP

Protective footwear

URBAN SERIES

1 PAIR
10 Pairs

metal free

S1P SRC HRO

EN ISO 20345



Sizes 35-48

285. Jonio

Suede leather casual shoe

- Heat resistant sole 300ºC
- Antistatic
- Composite toe cap
- Kevlar midsole
- Anti-slip SRC
- Oil resistant
- Bi-component EVA sole
- Breathable

metal free

SRC S3 HRO

EN ISO 20345



Sizes 35-48

286. Clodio

Microfibre and TPU sport shoe

- Heat resistant sole 300ºC
- Antistatic
- Composite toe cap
- Kevlar midsole
- Anti-slip SRC
- Oil resistant
- Bi-component EVA sole
- Breathable
- Softshell fabric

Sports footwear

Work footwear Sports series

1 PAIR
10 Pairs



228-Red. Perlio

Shoe without metal parts

Sizes 36-47

- Nylon mesh and microfibre
- Antistatic
- Composite toe cap
- Kevlar midsole
- Anti-slip SRA
- Antibacterial
- Oil resistant
- Nylon mesh and microfibre



228-Blue. Perlio

Shoe without metal parts

Sizes 36-47

- Nylon mesh and microfibre
- Antistatic
- Composite toe cap
- Kevlar midsole
- Anti-slip SRA
- Antibacterial
- Oil resistant



240. Baio Blue

Zapato sin Parts metálicas

Sizes 36-47

- Cow suede leather
- Antistatic
- Composite toe cap
- Kevlar midsole
- Anti-slip SRA
- Antibacterial
- Oil resistant



241. Baio Grey

Shoe without metal parts

Sizes 36-47

- Cow suede leather
- Antistatic
- Composite toe cap
- Kevlar midsole
- Anti-slip SRA
- Antibacterial
- Oil resistant


SAFETOP
SAFETOP


SAFETOP



metal free

SRC S1P

EN ISO 20345

246. Mario

Sizes 36-47

Without metal parts. With 3D fabric

- Flyknit fabric, foam interior
- Antistatic
- Composite toe cap
- Kevlar midsole
- Anti-slip SRC
- Antibacterial
- Oil resistant



metal free

SRA S1P

EN ISO 20345

249. Tokio

Sizes 37-47

No metal parts, elastic, no laces, no lacing

- Flyknit fabric, foam interior
- Antistatic
- Composite toe cap
- Kevlar midsole
- Anti-slip SRA
- Antibacterial
- Oil resistant



metal free

SRC S1P

ESD

EN ISO 20345

235. Axio

Sizes 36-47

Shoe without metal parts and EVA sole

- Antistatic and ESD
- Composite toe cap
- Kevlar midsole
- Anti-slip SRC
- Antibacterial
- Oil resistant
- Breathable



SRA S3

EN ISO 20345

231. Campio

Sizes 36-47

Casual shoes in cow leather

- Antistatic
- Composite toe cap
- Kevlar midsole
- Anti-slip SRA
- Water repellent WRU
- Oil resistant

Leather footwear

1 PAIR
10 Pairs

Leather footwear series



229. Incio

Sizes 35-48

Ventilated nubuck leather shoe

- Ventilation holes
- Antistatic
- Steel toe cap
- Steel midsole
- Anti-slip SRC
- Oil resistant
- Highly breathable



248. Erandio

Sizes 37-48

ESD boot in black nubuck with reflective piping in Red

- Antistatic
- Heat resistant sole 300ºC
- Composite toe cap
- Kevlar midsole
- Anti-slip SRC
- Oil resistant
- Water repellent WRU



222. Dumio

Sizes 35-48

Cowhide leather shoe

- Antistatic
- Steel toe cap
- Steel midsole
- Anti-slip SRC
- Oil resistant
- Dual density sole and padded tongue



250. Bakio

Sizes 37-48

ESD shoe in black nubuck with reflective inserts in Red

- Antistatic
- Heat resistant sole up to 300ºC
- Composite toe cap
- Kevlar midsole
- Anti-slip SRC
- Oil resistant
- Water repellent WRU



HRO
S3

EN ISO 20345





242. Cancio

Sizes 37-47

Boot made of Action Nobuck with 3D lining

- Micro-perforated EVA foam padding
- Antistatic
- Heat resistant sole 300ºC
- Composite toe cap
- Kevlar midsole
- Anti-slip SRC
- Oil resistant
- Water repellent WRU

SRC
S1P

EN ISO 20345





221. Abelio

Sizes 36-48

Cowhide leather boot with padded tongue

- Antistatic
- Steel toe cap
- Steel midsole
- Anti-slip SRC
- Oil resistant
- Dual density sole
- Polyester mesh lining

SRC
S3

EN ISO 20345





217. Pacio

Sizes 36-48

Cowhide leather boot with mesh lined interior

- Antistatic
- Steel toe cap
- Steel midsole
- Anti-slip SRC
- Oil resistant
- Dual density sole
- Water repellent WRU

Leather boots

1 PAIR
10 Pairs



SRC
S3

EN ISO 20345

Sizes 37-47

239. Ohio

Buffalo leather mid-calf boot

- Antistatic
- Steel toe cap
- Steel midsole
- Anti-slip SRC
- Oil resistant
- Dual density PU sole
- Polyester interior
- Heat and cold insulating fabric
- Mesh lining
- Water repellent WRU



SRC
S3

EN ISO 20345

220. Nerio

Sizes 36-48

Buckle boot, ideal for welding

- Antistatic
- Steel toe cap
- Steel midsole
- Anti-slip SRC
- Oil resistant
- Dual density sole
- Large dorsal area



SRC
S3

EN ISO 20345

219. Amio

Sizes 36-48

Boot with velcro fastening and inner laces

- Ideal welding
- Antistatic
- Steel toe cap
- Steel midsole
- Anti-slip SRC
- Oil resistant
- Dual density sole
- Water repellent WRU







SRC
S1P

EN ISO 20345





216. Bamio

Sizes 36-48

Boot with laces fastened with loops

- Cowhide leather
- Antistatic
- Steel toe cap
- Steel midsole
- Anti-slip SRC
- Oil resistant
- Polyester mesh interior

215. Lemaio

Sizes 36-47

Trekking boot designed for forestry activities

- Cowhide leather
- Without midsole and toe cap
- Antistatic
- Anti-slip SRC
- Oil resistant
- Polyester mesh interior
- Without toe cap and insole, it is not PPE.

Botas GodryTEX

WATER-RESPELLANT footwear series with inner membrane

Comfort guaranteed
Godry-Tex®
Waterproof / Breathable

1 PAIR
10 Pairs



Sizes 36-47

245. Ludrio

Nubuck split leather work boot

- Water-repellent membrane
- Moisture repellent
- Antistatic
- Composite toe cap
- Kevlar midsole
- Anti-slip SRC
- Oil resistant
- Bi-component EVA sole
- Breathable

SRC
S3

EN ISO 20345



Sizes 37-47

247. Klamath

Mountaineering boot without midsole and toe cap

- Water-repellent membrane
- Moisture repellent
- Antistatic
- Anti-slip SRC
- Oil resistant
- Bi-component EVA sole
- Breathable
- Without toe cap and insole, it is not PPE.

metal free



Sizes 37-47

244. Llodio

Nubuck boot without metal parts

- Water-repellent membrane
- Sole resistant up to 300ºC
- Moisture repellent
- Antistatic
- Composite toe cap
- Kevlar midsole
- Anti-slip SRC
- Oil resistant
- Sole Sole bi-component
- Breathable

SRC
S3
HRO

EN ISO 20345

One size 39-45

Socks

Packs of 3 pairs of socks.
Facilitate perspiration and ventilation of the foot.
Ideal for use with safety boots or steel toe boots.



1 PACK
10 PACKS





21401 21402

21403 21404







FOOTWEAR

PROTECTIVE GLOVES




sanoflex
SAFETOP® dos
CE
cat II
4121X
SAFETOP NET

Hand protection

How to choose the right glove?

Levels of protection

EN ISO 21420 General requirements
EN388 Mechanical risks
EN407 Thermal risks due to heat
EN511 Thermal risks due to cold
EN374 Chemical hazards

EN
ISO
-
21420

ASSESS THE RISK
ASSESS THE GRIP
EVALUATE CONFORT
RATE THE DEXTERITY
RATE THE DANGER



www.safetop.net



EN388:2016+A1:2017 Mechanical risks



	LEVEL 1	LEVEL 2	LEVEL 3	LEVEL 4		
A. Abrasion resistance (cycles)	100	500	2000	8000		
B. Resistance to cutting (slicing)	1,2	2,5	5	10		
C. Tear resistance (N)	10	25	50	75		
D. Puncture resistance (N)	20	60	100	150		
E. Shear strength TDM	NIVEL A	NIVEL B	NIVEL C	NIVEL D	NIVEL E	NIVEL F
F. Impact protection *Optional essay*	2N	5N	10N	15N	22N	30N

EN407:2020 Thermal hazards (heat and/or fire)



A. Flame behavior
B. Contact heat
C. Convective heat
D. Radiant heat
E. Small splashes of molten metal
F. Large masses of molten metal

X: if the value is X, it means that the glove has not been tested for this risk.

EN511:2006 Protection against cold temperatures



	LEVEL 1	LEVEL 2	LEVEL 3	LEVEL 4
A. Resistance to cold	0,10	0,15	0,22	0,30
B. Resistance to cold by contact	0,025	0,050	0,100	0,150
C. Impermeability to water	Level 1: waterproof for at least 30 min			

EN374-5:2016 Protective gloves against microorganisms



Virus protection

EN374-1:2016 Chemical risk. Only one pictogram and 3 types of gloves



TYPE A	Penetration resistance (EN374-2) Breakthrough time >30 min For at least 6 listed products	EN 374 Tipo A AJKLPR
TYPE B	Penetration resistance (EN374-2) Breakthrough time >30 min For at least 3 listed products	EN 374 Tipo B JKL
TYPE C	Penetration resistance (EN374-2) Passage time >10 min For at least 1 product from the list	EN 374 Tipo C

Selection guide

	Reference	Description	EN388:2016	EN407:2004	EN374	Alimentary	Satinized
Leather gloves	G114BS	Brion Suprem	2133X	41214X			
	G115	Sada	3142X				
	G115B	Soesto	2132X				
	G214B	Aba	3132X				
	G114B	Brion	2133X	41214X			
	G114LB	Xalo	4144X				
	G110ES	Camelle	2122				
	G110CV	Entrimo	2122				
	G117B	Nos	3132X	42224X			
	G111	Curtis	3021X				
	G125	Michigan Flex	3022X				
	G110B	Ares	3021X				
	G126	Berkeley Flex	-				
	G120RF	Brick Fit	4144X				
	G120A	Canada Tone	3143X				
	G120	Canada Fit	4143X				
	G120RB	Columbia Task	4144X				
	G120RV	Niagara Task	4144X				
	G124B	Eire Fit	3143X				
Welding gloves	G130	Ontario	3142X	412X4X			
	G132	Dover	3142X	41XX4X			
	G132K	Fene	3122X	41XX4X			
	G130RY	Alborg	4244X	412X4X			
	G130YF	Bangor	3143X	413X4X			
	G131	Essen	3143X	413X4X			
	G131-40	Essen Plus	4244X	413X4X			
	G131RY	Columbus	3233X	413X4X			
	G131KY	Maine	3233X	413X4X			
	G131CF	Camden	4143X	412X4X			
	G131RP	Acadia	4211X	413X4X			
	G133	Boston	2131X	412X4X			
Chemical gloves	G139	Chem Plus	4131X		AKL		
	G350	Heavy Tex	2121X		JKLNPT		
	G354	UltraTex	1110X		KPT		
	G953-20	Finedex Nitrasoft	2001X		JKLOT		
	G144	Power Coat	3101X		JKLOPT		
	G950-20	NeoFit	2110X		AKLMNOPT		
	G950-10	Power Bicolor	2111X		AKLMNPT		
	GT1612WG	Prochem	4121X		KLNOT		
	G944-32	Fisherman	3142X	X2XXXX	AKLMNO	☐	
	GRI560	Rubber	4121X		AKLMNOT		
	G507	Finedex Mangas	2100				
Disposable gloves	G062HR	Diamond HR			KPT	☐	
	061A	Diamond Safe			KPT	☐	
	061B	Diamond Safe negro			KPT	☐	
	049A	Nitri Safe			JKT	☐	
	049PF	Nitri Safe Plus			JKT	☐	
	049N	Nitri Safe Black			JKT	☐	
	G047HR	High Risk NITRILE			AKL	☐	
	G046H	High Risk Látex			KLMPT	☐	
	G045	DexteriTop					
	G045PF	DexteriTop Plus					
Synthetics	G105	SandyTact	4121X				
	G193	Bon Contact	4131X				
	G103	Biatex	4121X	X1XXXX		☐	◆
	155B	Nitrisol	3121X				
	G156B	NitriFit	3131X				
	G156B-12	NitrFit en paquetes de 12	3131X				
	G101	Fit-o-lite	4121X				

		Description	EN388:2016	EN407:2004	EN374	EN511	Alim./Satiniz.
Synthetic gloves	G102	Fit-o-lite Strings	4121X				
	G170	Faether Task	4131X				
	G170B	Faether Task Grey	4131X				
	G170N	Faether Task negro	4131X				
	G170B-12	Faether Task Grey en paquetes de 12	4131X				
	G147	ErgoSafe	4111X				
	G148	ErgoSafe Plus	4111X				
	G157	Maxinite	4111X				
	G138	Red-Armor-Plus	4121X				
	G146	Ergonit	3111X				
	G128	Detroit	-				
	G107	FlexiLatex	2121X				
	G150GB	Tough Wire	2142X				
	G301	HydroFoam	2131X				
	60-10	DuraLux	4131X				
	60-11	DuraLux 3/4	4131X				
	60-12	DuraLux Coated	4131X				
	60-80	OxyLux	4131X				
	60-90	OxyLux Dots	4131X				
	60-20	DigiLux Palm	4121X				
	61-15	TactyLux	4131X				
	60-60	HandyLux Palm	4121X				
	60-32	RacerLux	4121X				
	60-42	Drylux Coated	4131X	X1XXXX			
	62-10	ArmoLux Palm	4131X	X1XXXX			
	62-12	ArmoLux Coated	4131X				
	62-14	ArmoLux Touch Screen	4131X	X1XXXX			
	64-61	FortiLux	4231B				
	64-71	TornoLux-N	4X43F	X1XXXX			
Anti-cut gloves	64-23	DryCut	4X43C				
	64-24	DryCut-N	4131X	X1XXXX			
	64-10	BladeLux	4X43D				
	64-50	PicCut	4X42B				
	64-31	RobustoLux	4X42D				
	64-40	GripCut	4X42D				
	64-60	CutFort	4X42B	X1XXXX			
	GLFK-5	Rubber 5	3X43B				
	GNFD16	Light Task	4X43B				
	G150KV	Task 5	4X42C				
	G151KV	Bladex 5	4X42C				
	G150GD	MetalGrip	3341B				
	G253	NK-Cote	EN1082				
	G253L	NK-Cote Largo	EN1082				
	24160	Alupro	2040	44XX34			
	GSLKW14	Mangas de Formida	1X2XC	X1XXXX			
	G239	PicGuard	4X43E				
	G223	Guante TerryTop	1231X	X2XXXX			
	G406	Manopla TerryTop	2X32C	X2XXXX			
	G020	Triconyl	213X				
	G625	Terry Mix	1X3XC	X1XXXX			
	GZAVG	Glovezilla	4X42B				
	80101	Muñequera	-				
	G080	Light Forde	-				
	G093	TricoFlex	-				
	G095	TricoTex	-				
	G112	Dotty Blue	214XX				
	G114FB	Dorneda Black	-				
	G114F	Dorneda	-				
	G691	IceGrip	221X			120	
	G2006	Winter Pro	4221X		AJKLNOT		
	60-52	ScandiLux	4121X				
	G308	ThermoFoam	2131X			X20	
	G180	CryoChef	2422	X1XXXX		331	
	G184	CryoLite	2122	X2XXXX		341	
	G645	CryoPlus	1242			241	

Leather gloves



EN388 EN407

2133X 42224X

G117B. Nos

Cowhide leather glove

- Elastic on the back
- Length 30 cm (extra long)
- Thermal hazards up to 250ºC
- Extra resistant
- Good feel and dexterity
- Thickness of skin 1.2 mm

EN 420 EN388 EN407

8 9 10 11

12 Pairs (blister)
120 Pairs

THERMAL



EN388 EN407

2133X 41214X

G114BS. Brion Suprem

Top quality cowhide leather glove

- Good feel and flexibility
- Elastic on the back
- Thermal hazards up to 100ºC
- Served in blister packs
- Extra selected leather
- Length 26cm
- Pendant

EN 420 EN388 EN407

7 8 9 10 11

12 Pairs (blister)
120 Pairs

THERMAL



EN388
2122

G110ES. Camelle

Leather and cotton glove White

- Good feel and flexibility
- Elastic cuff
- Mechanical risks
- Served in blister packs
- Grain leather

EN 420 EN 388

7 8 9 10

12 Pairs (blister)
120 Pairs



EN388
2122

G110CV. Entrimo

Leather and cotton glove

- Good feel and flexibility
- With Velcro fastening at the cuff
- Mechanical risks
- Served in blister packs

EN 420 EN 388

7 8 9 10

12 Pairs (blister)
120 Pairs



EN388

8 9 10

3142X

G115. Sada

Full split leather glove

- Elastic inside
- Length 25 cm

EN 420 EN388

12 Pairs
120 Pairs



EN388

9

2132X

G115B. Soesto

Split leather and split leather glove

- Protected seams
- Length 25 cm
- Split leather on back
- Flower on palm and fingers

EN 420 EN388

12 Pairs
120 Pairs



EN388

7 8 9 10 11 12

3132X

G214B. Aba

Bovine grain leather glove

- Elastic on the back
- Length 26 cm

EN 420 EN388

12 Pairs
120 Pairs



EN388 EN407

6 7 8 9 10 11 12

2133X 41214X

THERMAL

White: G114B

Yellow: G114

G114B. Brión

Full grain cowhide leather glove

- Elastic on the back
- Length 26 cm
- Thermal hazards up to 100ºC
- Extra resistant
- Good feel and dexterity
- Served in blister packs
- Individual bag

EN 420 EN388 EN407

12 Pairs (blister)
120 Pairs



EN388

8 9 10

4144X

G114LB. Xalo

Full grain cowhide leather glove

- Palm-thumb reinforcement
- Length 26 cm
- Split cowhide leather reinforcement on palm and thumb

EN 420 EN388

12 Pairs
120 Pairs



EN388

3022X

8 9 10

G125. Michigan Flex

In polyester and grain sheepskin

- Palm and thumb reinforcement
- Length 25 cm

EN 420 EN388

12 Pairs (individual bag)
120 Pairs



EN388

3021X

7 8 9 10

G111. Curtis

In polyester and grain sheepskin

- Elastic on the back
- Length 25 cm

EN 420 EN388

12 Pairs (individual bag)
120 Pairs



EN388

3021X

6 7 8 9 10

G110B. Ares

In cotton and grain sheepskin

- Nail protection
- Length 25 cm

EN 420 EN388

12 Pairs (individual bag)
120 Pairs



G126. Berkeley Flex

In full grain sheepskin

- Velcro on cuff
- Length 25 cm
- Mechanical Type
- Minimal risks

9 10

1 PAIR
120 Pairs



EN388 9
4144X

G120RF. Brick-Fit

Cotton canvas and split cow leather

- Palm reinforcement
- Length 26 cm

EN 420 EN388

12 Pairs (blister)
120 Pairs



EN388 10
3143X

G120A. Canada Tone

Cotton canvas and split cow leather

- Reinforced fingernails and knuckles
- Length 26 cm
- Mustard colour

EN 420 EN388

12 Pairs (blister)
120 Pairs



EN388 10
4143X

G120. Canada Fit

Cotton canvas and split cow leather

- Reinforced fingernails and knuckles
- Length 26 cm

EN 420 EN388

12 Pairs (blister)
120 Pairs



EN388 9 10
4144X

G120RB. Columbia TasK

Cotton canvas and split cow leather

- Palm, index finger and thumb reinforcement
- Length 26 cm
- Extra quality
- Sewn with Kevlar thread

EN 420 EN388

12 Pairs
96 Pairs



EN388 8 9 10
4144X

G120RV. Niagara Task

Cotton canvas and split cow leather

- Palm, index finger and thumb reinforcement
- Length 26 cm

EN 420 EN388

12 Pairs (blister)
120 Pairs



EN388 8 9 10
3143X

G124B. Eire Fit

Grain cow leather and cotton canvas

- Thickness: 1.2 mm on palm
- Length 26 cm

EN 420 EN388

12 Pairs
120 Pairs

Welding gloves



EN388 3142X | EN407 412X4X | 9 10

EN388 | THERMAL | TIG TYPE B

G130. Ontario

Split leather glove

- In two pieces
- Length 35 cm
- Thermal risks
- Type B. Valid For TIG
- Unlined interior
- Protected inner seams

EN420 EN388 EN407 EN12477

12 Pairs
60 Pairs



EN388 3142X | EN407 41XX4X | 8 9 10 11

EN388 | THERMAL | TIG TYPE B

G132. Dover

Full grain cowhide leather glove

- In two pieces
- Length 40 cm
- Thermal risks
- Type B. Valid for TIG
- Kevlar thread seams
- Excellent touch

EN420 EN388 EN407 EN12477 EN1149-2

12 Pairs
120 Pairs



EN388 4143X | EN407 412X4X | 11

EN388 | THERMAL | WELDING

G131CF. Camden

Split cow leather glove

- Top of the range. Protected knuckles
- Length 35 cm
- Thermal risks
- Type A. Valid welding
- Elastic on the inside of the wrist
- Kevlar thread seams

EN420 EN388 EN407 EN12477

12 Pairs
60 Pairs



EN388 3122X | EN407 41XX4X | 9 10

EN388 | THERMAL | TIG TYPE B

12 Pairs
120 Pairs

G132K. Fene

Full grain cowhide leather glove

- In two pieces
- Length 29 cm
- Thermal risks
- Type B. Valid For TIG
- Double palm with reinforcement
- Unlined interior

EN420 EN388 EN407 EN12477 EN1149-2



EN388 4244X | EN407 412X4X | 9

EN388 | THERMAL | WELDING

12 Pairs
60 Pairs

G130RY. Alborg

Split leather glove

- Cotton interior
- Length 28 cm
- Thermal risks
- Type A. Valid welding
- Reinforced palm, thumb and index finger
- Double stitching in kevlar thread

EN420 EN388 EN407 EN12477



EN388 3143X | EN407 413X4X | 10

EN388 | THERMAL | WELDING

12 Pairs
120 Pairs

G130YF. Bangor

Split leather glove

- Elastic at wrist
- Longitud 28 cm
- Thermal risks
- Thermal risks
- Type A. Valid welding
- Knuckle protection

EN420 EN388 EN407 EN12477 EN1149-2



EN388 3143X | EN407 413X4X

35 CM G131-35 (Sizes 9-11)

40 CM G131-40 (SIZE única 10)

EN388 | THERMAL | WELDING

12 Pairs
60 Pairs

G131. Essen

Split cow leather glove

- Available in 35 or 40 cm
- Back in 1 piece and palm in 2 pieces
- Thermal risks
- Type A valid For welding
- Protected hidden seams
- Palm lining

EN420 EN388 EN407
EN12477 EN1149-2



EN388 4244X | EN407 413X4X

10

EN388 | THERMAL | WELDING

12 Pairs
60 Pairs

G131RY. Columbus

Split cow leather glove

- High-end
- Length 40 cm
- Thermal risks
- Type A valid For welding
- Kevlar thread seams
- Reinforced palm, thumb and index finger

EN420 EN388
EN407 EN12477



EN388 3233X | EN407 413X4X

10

EN388 | THERMAL | WELDING

12 Pairs
60 Pairs

G131KY. Maine

Split cow leather glove

- High-end
- Length 40 cm
- Thermal risks
- Type A valid For welding
- Kevlar thread seams
- Reinforced palm and thumb

EN420 EN388
EN407 EN12477



EN388 EN407 **9**

4211X 413X4X

EN388 THERMAL WELDING

12 Pairs
120 Pairs

G131RP. Acadia

Split leather glove

- Elastic at wrist
- Length 35 cm
- Thermal risks
- Type A. Valid welding
- Type A. Valid welding
- Kevlar thread seams
- Lined inside
- Reinforced index finger and thumb

EN420 EN388
EN407 EN12477



Chemical gloves

EN374
Levels of protection

EN374-1 Chemical hazard. Type A, B or C
EN374-2 Penetration resistance
EN374-5 Protection against micro-organisms

A	Methanol	Primary alcohol
B	Acetone	Ketone
C	Acetonitrile	Nitrile
D	Methyl chloride	Chlorinated hydrocarbon
E	Carbon disulphide	Sulphur-containing organic compound
F	Toluol	Aromatic hydrocarbon
G	Diethylamine	Amine
H	Tetrahydrofuran	Heterocyclic ether
I	Ethyl acetate	Ester
J	N-Heptane	Saturated hydrocarbon
K	Caustic soda 40% Caustic soda	Inorganic base
L	Sulphuric acid 96% Nitric acid	Inorganic mineral acid, oxidising
M	Nitric acid 65% Acetic acid	Inorganic mineral acid, oxidising
N	Acetic acid 99	Organic acid
O	Ammonia 25% Hydrogen peroxide	Organic base
P	Hydrogen peroxide 30% Hydrofluoric acid	Peroxide
Q	Hydrofluoric acid 40% Hydrofluoric acid	Inorganic mineral acid
T	Formaldehyde 37% Formaldehyde 37	Aldehyde

EN 374 - Types

AGAINST VIRUSES
IMPERMEABLES
AGAINST CHEMICALS

www.safetop.net



PVC



EN388	EN ISO 374-5	EN ISO 374-1
4131X	VIRUS	AKL Tipo B

G139. Chem Plus

PVC glove with chemical resistance and available in 3 lengths

- Cotton interlock backing
- Smooth finish
- Finger contouring for a better fit
- Thickness: 1,3 mm

12 Pairs
120 Pairs

9 **10**

Available lengths

27 CM G139-27. Long 27 cm

35 CM G139-35. Long 35 cm

40 CM G139-40. Long 40 cm

EN420 EN388 EN374



LATEX-NEOPRENE

EN388 2121X | EN ISO 374-5 VIRUS | EN ISO 374-1 Tipo A JKLNPT | 7 8 9 10

EN388 | CHEMICAL | WATERPROOF | FOOD

12 Pairs
120 Pairs (bag individual)

G350. HeavyTex

Latex and **neoprene** flocked glove

- Waterproof. Seamless base
- Extremely robust
- Length: 32 cm
- Non-slip finish
- Valid for food
- Thickness: 0,68 mm
- Against a multitude of chemicals

EN420 EN388 EN374



LÁTEX

EN388 1110X | EN ISO 374-5 VIRUS | EN ISO 374-1 Tipo A KPT | 7 8 9 10

EN388 | CHEMICAL | WATERPROOF | FOOD

12 Pairs
120 Pairs (bolsa individua)

G354. UltraTex

Latex flocked glove

- Waterproof. Seamless base
- Excellent dexterity and comfort
- Length: 30 cm
- Chlorinated: easy to apply-remove
- Valid for food
- Thickness: 0,40 mm
- Against many chemicals

EN420 EN388 EN374



NITRILE

EN388 2001X | EN ISO 374-5 VIRUS | EN ISO 374-1 Tipo A JKLOT | 7 8 9 10

EN388 | CHEMICAL | WATERPROOF | FOOD

10 Pairs
100 Pairs

G953-20. Finedex Nitrasoft

Unsupported nitrile glove

- Waterproof
- With cotton flocking inside
- Length: 33 cm
- Rough finish on the palm
- Thickness: 0,22 mm
- Against a multitude of chemicals
- Valid for food

EN420 EN388 EN374

NITRILE

EN388	EN ISO 374-5	EN ISO 374-1		
3101X	VIRUS	JKLOPT	Tipo A	7 8 9 10

EN388 CHEMICAL WATERPROOF

10 Pairs
100 Pairs



G144. Power Coat

Unsupported nitrile glove

- Waterproof
- Cotton inner flocking
- Length: 33 cm
- Rough finish on the palm
- Thickness: 0,38 mm
- Against many chemicals

EN420 EN388 EN374

NEOPRENO

EN388	EN ISO 374-5	EN ISO 374-1		
2110X	VIRUS	AKLMNOPT	Tipo A	8 9 10

EN388 CHEMICAL WATERPROOF

10 Pairs
100 Pairs



G950-20. NeoFit

Unsupported neoprene glove

- Waterproof
- Cotton flocked interior
- Length: 33 cm
- Diamond anti-slip finish
- Extra thick: 0.72 mm
- Against many chemicals
- Easy to put on and take off

EN420 EN388 EN374

LÁTEX-NEOPRENO

EN388	EN ISO 374-5	EN ISO 374-1		
2111X	VIRUS	AKLMNPT	Tipo A	8 9 10

EN388 CHEMICAL WATERPROOF

10 Pairs
100 Pairs
(individual bag)



G950-10. Power bicolor

Neoprene and latex glove

- Waterproof. Flocked interior
- Sin soporte forrado recubierto
- Length: 32 cm
- Embossed finish on palm
- Extra thick: 0.72 mm
- Against a multitude of chemicals

EN420 EN388 EN374

EN388
3101X

FLEXIBLE CHEMICAL EN388 FOOD

G951-10. Latex Bicolor

Synthetic rubber glove

- Suitable for food handling..
- Length 32 cm

EN ISO 374 ANSI ABRASION 4 EN 388

7 8 9 10

10 Pairs
100 Pairs



EN388 4121X | EN ISO 374-5 VIRUS | EN ISO 374-1 Tipo A KLNOT | EN421

EN388 CHEMICAL WATERPROOF

GT1612WG. Prochem

Foamed PVC glove

- Waterproof and antistatic
- Length: 30 cm

EN420 EN388 EN ISO 374-5 EN ISO 374-1 EN421

8 9 10 11

12 Pairs
72 Pairs



EN388 3142X | EN407 X2XXXX | EN ISO 374-5 VIRUS | EN ISO 374-3 Tipo A AKLMNO

EN388 THERMAL CHEMICAL WATERPROOF FOOD

G944-32. Fisherman

Latex glove on polyamide

- Waterproof
- Thermal risk up to 250ºC
- EsWeightr: 1,3 mm
- Valid for food
- Rough crepe finish: Grip

EN420 EN388 EN374 EN407

7 8 9 11

10 Pairs
100 Pairs



Flexitril







EN388	EN ISO 374-5	EN ISO 374-1 Tipo A
3101X	VIRUS	AJKOPT

G323. Flexitril Flocked

Synthetic rubber glove

- Suitable for food handling.
- Length 32 cm

EN 388 EN ISO 374 ANSI ABRASION 4

S M L XL 2XL

12 Pairs (blister pack)



EN388	EN407	EN ISO 374-1 Tipo A
4X32C	X1XXXX	JKMOPT

G333. Flexitril Corte 'C'

Cut-resistant glove A3/C with microfoam

- Provides puncture resistance.
- Length 32 cm

EN 388 EN 407 EN ISO 374-1

S M L XL 2XL

12 Pairs (blister pack)



Disposable gloves

Disposable and chemical series

EN374
DISPOSABLE

NITRILE



061A. DiamondSafe orange

- Orange diamond nitrile
- Chemical, industrial or medical
- Length 25 cm. Food
- EN420 EN374 EN455

7 8 9 10

1 dispenser (50 pcs)
10 dispensers (500 pcs)



NITRILE



061B. DiamondSafe black

- Black diamond nitrile
- Chemical, industrial or medical
- Length 25 cm. Food
- EN420 EN374 EN455

7 8 9 10

1 dispenser (50 pcs)
10 dispensers (500 pcs)



NITRILE



049A. NitriSafe

- Nitrile Blue powder free
- Chemical, industrial or medical
- Length 25 cm. Food
- EN420 EN374

7 8 9 10

1 dispenser (100 pcs)
10 dispensers (1000 pcs)



NITRILE



049N. NitriSafe Black

- Black powder-free nitrile
- Chemical, industrial or medical
- Length 25 cm. Food
- EN420 EN374 EN455

7 8 9 10

1 dispenser (100 pcs)
10 dispensers (1000 pcs)



LÁTEX 100%



G046HR. HIGH RISK

- Disposable latex glove
- Protection against micro-organisms
- Dust-free
- Extra-long
- EN420 EN374 EN455 EN16523 ISO 16604

7 8 9 10

1 dispenser (50 pcs)
10 dispensers (500 pcs)




SAFETOP
NitriSof



NITRILE

EN388 BREATHABLE FLEXIBLE LIGHT THERMAL FOOD

EN388 4121X | EN407 X1XXXX

6 7 8 9 10 11

G103. Biatex

Seamless glove with nylon and lycra backing. Foam nitrile coated up to the knuckles.

- Does not produce bacteria
- Breathable and satin-finished
- Certificate For food
- Thermal risks up to 100ºC
- Valid for sensitive skin
- With the OekoTex® guarantee
- Excellent feel and grip
- Extra long 27 cm

EN420 EN388 EN407

12 Pairs (blister)
120 Pairs



NITRILE

EN388 BREATHABLE FLEXIBLE LIGHT

EN388 3121X

6 7 8 9 10 11

155B. Nitrisol

Seamless glove with polyamide backing. Nitrile coated up to the knuckles.

- Does not produce bacteria
- Excellent feel and grip
- Ideal for wet environments
- Length 25 cm

EN420 EN388

12 Pairs (blister)
120 Pairs



EN388 | BREATHABLE | FLEXIBLE | LIGHT

EN388

4131X

6 7 8 9 10

NITRILE

G193. BonContact

Nylon backed glove coated with porous nitrile up to the knuckles.

- No produce bacterias
- Excellent touch
- Highly breathable

EN420 EN388

12 Pares (blister)
120 Pares





EN388

4121X

6 7 8 9 10

NITRILE

G105. SandyTact

Nylon backed glove
coated with sanded nitrile
up to the knuckles.

- Does not produce bacteria
- Excellent touch
- Excellent grip
- Extra-grip

EN420 EN388

12 Pares (blister)
120 Pares

GUANTES



NITRILE

EN388 | BREATHABLE | FLEXIBLE | LIGHT | GRIP

EN388
4121X

6 7 8 9 10 11

G102. Fit-o-lite Strings

Nylon-lycra and nitrile glove

- Extra grip: palm stripes
- Length 26 cm

EN420 EN388

12 Pares (blister)
120 Pares





NITRILE

EN388 | BREATHABLE | FLEXIBLE | LIGHT | GRIP

EN388
4121X

6 7 8 9 10 11

G101. Fit-o-Lite

Nylon-lycra and nitrile glove

- Extra grip: palm stitches
- Length 26 cm

EN420 EN388

12 Pares (blister)
120 Pares



NITRILE

EN388 | BREATHABLE | FLEXIBLE | LIGHT

EN388
3131X

6 7 8 9 10 11

NitriFit

Polyester glove with nitrile palm coating

- Ventilated, breathable back
- Length 26 cm

EN 420 EN388

12 Pairs
120 Pairs


G156B — **G156B. NitriFit**
Served in individual bags

G156B-12 — **G156B-12**
Served in packs of 12

Seamless POLYURETHANE coating

Faether Task

One-piece glove with polyurethane coating and polyester backing
Ideal for mechanics and handling





POLIURETANO



6 7 8 9 10 11

12 Pairs (individual bag)
120 Pairs

G170



G170B

6 7 8 9 10 11

12 Pairs (individual bag)
120 Pairs



6 7 8 9 10

12 Pairs (individual bag)
120 Pairs

G170N

G170B-12
Served in packs of 12

G170B-12

GLOVES



EN388 7 8 9 10
4111X

NITRILE

G147. ErgoSafe

Plush cotton backing

- 3/4 nitrile coated
- Oil resistance

EN420 EN388

12 Pairs
120 Pairs



EN388 7 8 9 10
4111X

NITRILE

G148. ErgoSafe Plus

Plush cotton backing

- All nitrile coated
- Oil resistance

EN420 EN388

12 Pairs
120 Pairs



EN388 7 8 9 10
4111X

NITRILE

G157. Maxinite

Cotton jersey backing

- All nitrile coated
- Oil resistance

EN420 EN388

12 Pairs
120 Pairs



PVC

Available lengths

27 CM	G138-27. Length 27 cm
35 CM	G138-35. Length 35 cm
40 CM	G138-40. Length 40 cm

EN388 7 8 9 10
4121X

G138. Red-Armor-Plus

PVC glove

- Different lengths
- Excellent touch

EN420 EN388

12 Pairs
120 Pairs

- Ideal fats or oils
- With cotton interlock lining
- Smooth finish
- Thickness 1,4 mm

NITRILE



EN388 7 8 9 10
3111X

G146. ErgoNit

Plush cotton backing

- All nitrile coated
- Oil resistance

EN420 EN388

12 Pairs
120 Pairs

G128. Detroit

Mechanic type glove in synthetic leather
synthetic leather and elastic fabric

9

- Adjustable with Velcro
- Length 25 cm
- Reinforcement between thumb and knuckles
- Anti-pressure palm pads

Minimal risks

1 PAIR
120 Pairs





SYNTHETIC LEATHER

Blue: G128B

Red: G128R

Latex

Latex seamless gloves



micro porous LATEX



EN388

2121X

7 8 9 10 11

G107. FlexiLatex

Plush cotton backing

+ Latex coated
+ Oil resistant
+ Satin coated
+ Highly breathable
+ Roughened palm

EN420 EN388

12 Pairs (individual bag)
120 Pairs

LATEX





EN388 2142X

7 8 9 10

G150GB. Tough Wire

Cotton and polyester base


- Latex coated
- Rough finish: extra grip

EN420 EN388

12 Pairs (single bag)
120 Pairs

LATEX





EN388 2131X

7 8 9 10

G301. HydroFoam

Waterproof glove

- All latex coated
- Textured palm and fingers
- Excellent fit
- 2 textures


EN420 EN388

12 Pairs (blister)
120 Pairs

LATEX micro porous



ULTRA CONFORTABLE



EN388 2121X

6 7 8 9 10 11

G319. Rainsoft

Waterproof two-layer latex glove


- Ultra-flexible latex
- Second adhesive layer
- Micro porous on palm and fingers
- High wet grip
- Rough on the palm
- 18 g

EN420 EN388

12 Pairs (blister)
120 Pairs

Digitx

Range of elastic and ultra-thin gloves

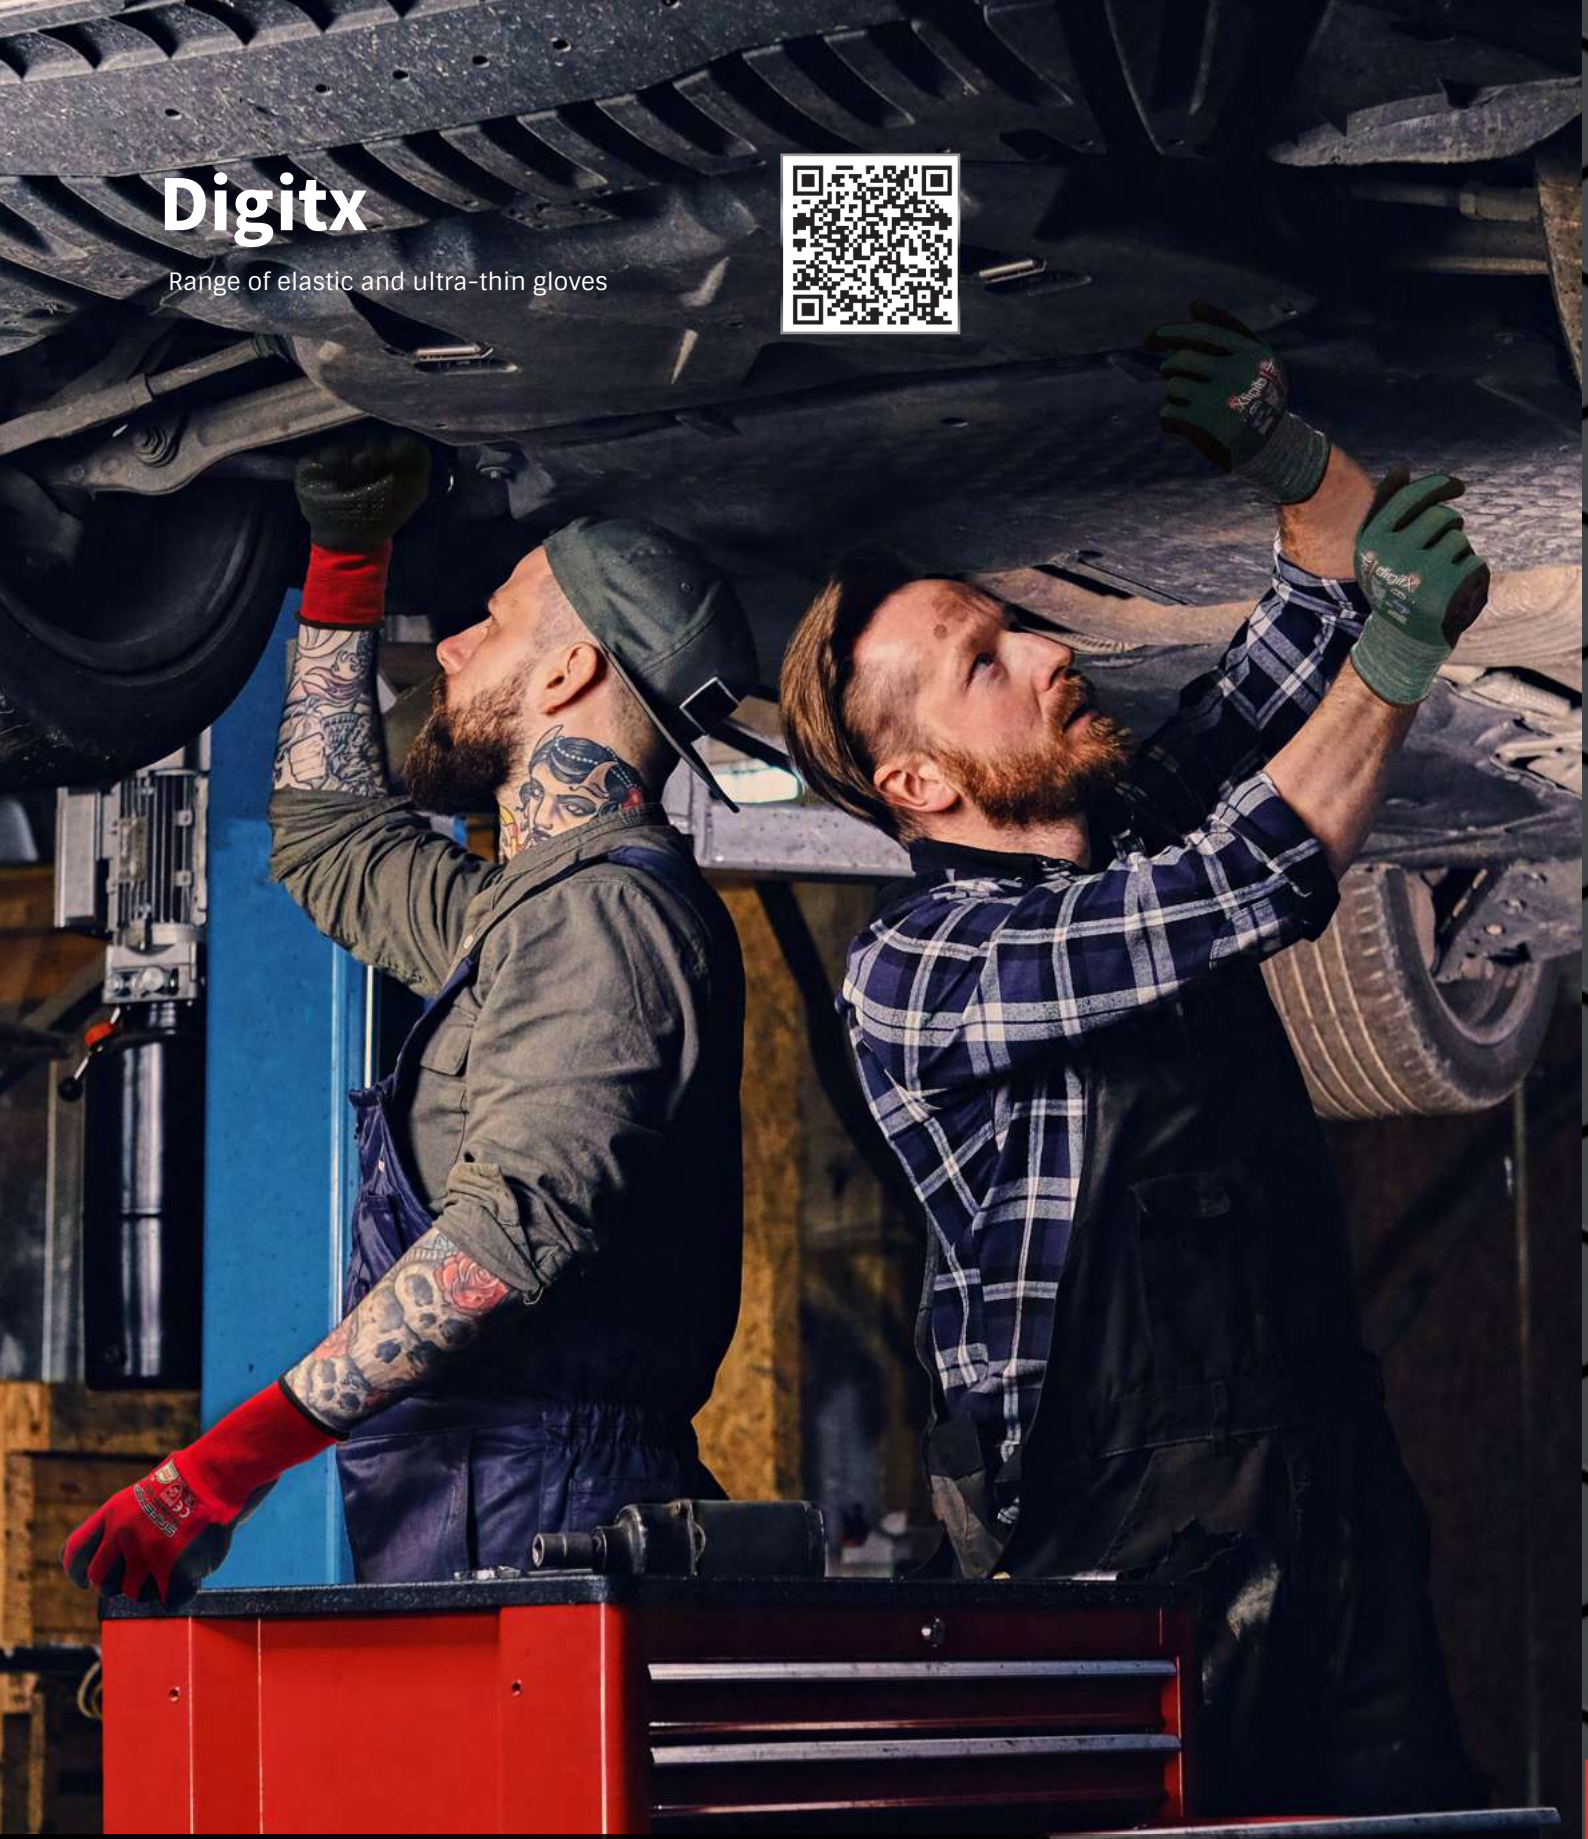

The Digitx Series gloves are characterised by high comfort and flexibility.
Focused on innovation, design and quality, they have been dermatologically tested to offer maximum comfort and skin care.
For maximum comfort and skin care.

www.digitx-gloves.com

Digitx ® gloves

Focused on innovation. Digitx gloves have been created and designed to avoid hand fatigue during repetitive tasks. They are characterised by their dexterity and flexibility. By definition, dexterity refers to the ease with which a task can be easily performed with the hands.

100% HandCare

Digitx gloves have been dermatologically tested to guarantee the softness and care of the skin. skin care.

Confort

The effectiveness of the integrated hygiene function is long-lasting and reliable. It is applied to the products during production and guarantees a long-lasting effect.

Sanizited®

The Sanitized hygiene function protects against fungal and bacterial growth and prevents unpleasant odours. odours. Long-lasting freshness and longer life.

Standard 100 by OekoTex®

The world's leading eco-label assures consumers that textile products have been tested for substances harmful to health.

Patented technology

Creating a feeling of well-being, effectively and durably. This means comfort, long-lasting freshness freshness and more peace of mind.

YOUR SUCCESS IS IN YOUR HANDS

digitX®

digitx-gloves.com

DuraLux Series

21,000 cycles of abrasion resistance

EN388
4131X

CONFIDENCE IN TEXTILES
Tested for harmful substances according to Oeko-Tex® Standard 100



www.digitx-gloves.com



NITRILE



6 7 8 9 10 11

60-10. DuraLux

15G seamless glove
nylon and lycra, nitrile coated
nitrile coated palm

- Does not produce bacteria
- Breathable and satin-finished
- 21,000 Abrasion cycles
- Valid for sensitive skin
- With the OekoTex® guarantee
- Excellent feel
- Extra long cuff

EN420 EN388

12 Pairs (blister)
144 Pairs

NITRILE



6 7 8 9 10 11

60-11. DuraLux 3/4 Coated

15G seamless glove
made of nylon and lycra, coated
3/4 nitrile coated on the back

- Does not produce bacteria
- Transpirable y satinizado
- 21.000 Ciclos abrasión
- Válido pieles sensibles
- Con la garantía OekoTex
- Excelente tacto
- Puño extra largo

EN420 EN388

12 Pairs (blister)
144 Pairs

NITRILE



6 7 8 9 10 11

60-12. DuraLux Coated

15G seamless glove
made of nylon and lycra, fully nitrile coated

- No produce bacterias
- Transpirable y satinizado
- 21.000 Ciclos abrasión
- Válido pieles sensibles
- Con la garantía OekoTex
- Excelente tacto
- Puño extra largo

EN420 EN388

12 Pairs (blister)
144 Pairs

OxyLux

The most comfortable and flexible of the series



EN388
4131X

CONFIDENCE IN TEXTILES
Tested for harmful substances according to Oeko-Tex® Standard 100



EN388 | BREATHABLE | FLEXIBLE | LIGHT

5 6 7 8 9 10 11

60-80. OxyLux NITRILE

15G seamless glove
nylon and lycra, coated
NITRILE up to the knuckles

- Does not produce bacteria
- Breathable and satin-finished
- The most comfortable in its class
- Valid for sensitive skin
- With the OekoTex® guarantee
- Excellent feel and ultra-lightweight
- Extra long cuff

EN420 EN388

12 Pairs (blister)
144 Pairs



EN388 | BREATHABLE | FLEXIBLE | LIGHT | GRIP

6 7 8 9 10 11

60-90. OxyLux Dots NITRILE

Identical glove to the OxyLux but
with dots on the palm for a better
grip. Excellent grip

- Does not produce bacteria
- Breathable and satin-finished
- The most comfortable in its class
- Valid for sensitive skin
- With the OekoTex® guarantee
- Excellent feel and ultra-lightweight
- Extra long cuff


EN420 EN388

12 Pairs (blister)
144 Pairs

DigiLux

Extra fine. Excellent feel

NITRILE



7 8 9 10

EN388
4121X

CONFIDENCE IN TEXTILES
Tested for harmful substances
according to Oeko-Tex® Standard 100

60-20. DigiLux Palm

15G seamless glove
nylon and lycra, coated
NITRILE up to the knuckles

- Does not produce bacteria
- Breathable and satin-finished
- Extra fine (only 19 g)
- Valid for sensitive skin
- With the OekoTex® guarantee
- Excellent feel and ultra-lightweight
- Extra long cuff

EN420 EN388

12 Pairs (blister)
144 Pairs



GLOVES

Digitx

Other gloves in the Digitx series







NITRILE Extra fine





5 6 7 8 9 10 11

61-15. TactyLux

Ultra-thin 18G seamless nylon and lycra glove, coated in NITRILE NITRILE palm

- Maximum tact
- Does not produce bacteria
- Breathable and satin-finished
- Valid for sensitive skin
- With the OekoTex® guarantee
- The lightest: only 14 g
- Very high abrasion resistance
- Extra long cuff

EN420 EN388

12 Pairs (blister)
144 Pairs

NITRILE





6 7 8 9 10 11

60-60. HandyLux Palm


15G seamless glove
nylon and lycra, coated
NITRILE palm

- Anti-tracking
- Does not produce bacteria
- Breathable
- Good wet and dry grip
- Excellent feel
- Flexible and durable
- Extra long cuff

EN420 EN388

12 Pairs (blister)
144 Pairs

NITRILE





7 8 9 10 11

60-32. RacerLux

15G seamless glove
made of nylon and lycra, fully coated with foamed NITRILE

- Water-repellent
- Excellent dexterity
- Easy to put on and take off
- Ideal for intermittent tasks
- Flexible
- Abrasion resistance
- Elasticated cuff

EN420 EN388


12 Pairs (blister)
144 Pairs







NITRILE



6 7 8 9 10 11

12 Pairs (blister)
144 Pairs

60-42. DryLux Coated

15G seamless glove
made of nylon and lycra, fully coated with NITRILE

- Waterproof
- Heat resistant up to 100ºC
- Breathable and satin-finished
- Does not produce bacteria
- Valid for sensitive skin
- Excellent touch
- GRIP: NITRILE roughened on the palm
- Ideal hot oils or liquids
- Extra long cuff


EN420 EN388 EN407

ArmoLux

Maximum grip series thanks to palm stripes



NITRILE





6 7 8 9 10 11

62-10. ArmoLux Palm

13G seamless glove
made of nylon-lycra, coated
NITRILE foamy on the palm


- Optimised grip
- Very good adhesion
- NITRILE stripes on the palm of the hand
- Good breathability
- Heat resistant to 100ºC
- Ideal for humid environments
- Excellent dexterity
- Extra long cuff


EN420 EN388 EN407

12 Pairs (blister)
144 Pairs



NITRILE





7 8 9 10 11

62-12. ArmoLux Coated

Glove 13G seamless.
made of nylon and lycra, fully coated with micro-foam NITRILE


- Optimised grip
- Very good adhesion
- NITRILE stripes on the palm of the hand
- Good breathability
- Ideal fats or oils
- Ideal for humid environments
- Excellent dexterity
- Extra long cuff

EN420 EN388

12 Pairs (blister)
144 Pairs



NITRILE





6 7 8 9 10 11

62-14. ArmoLux TouchScreen

Glove similar to ArmoLux Palm 60-10 but treated for use with with tablets or mobile phones.

- Optimised grip
- Very good adhesion
- NITRILE stripes on the palm of the hand
- Good breathability
- Ideal fats or oils
- Ideal for humid environments
- Excellent dexterity
- Extra long cuff

EN420 EN388

12 Pairs (blister)
144 Pairs


digitX
AmoLux
62-14
CAT II


TornoLux-N
F
digitx-gloves.com
EN388:2016
4X43F
EN407:
2020
X1XXXX
CAT II
G4-71
9
digitX

Anti-Cut Gloves





64-61. Fortilux NITRILE ultrafine

18G glove with nylon backing

- With reinforcement between thumb and forefinger
- NITRILE coated up to the knuckles
- Good grip in dry or wet environments
- Very high tear strength
- 30% lighter than other anti-cuts
- Flexible and comfortable.

EN420 EN388

8 9 10

12 Pairs (blister)
144 Pairs







64-71. TornoLux-N NITRILE

13g nylon glove with anti-cut fibres,
NITRILE coated palm and ventilated back of hand

- Superlative anti-cutting level F
- Very high mechanical strength
- Ideal critical cutting risks
- Thermal hazards up to 100ºC
- Satin-finished and breathable
- Antimicrobial treatment
- Valid for sensitive hands
- With the OekoTex® guarantee

EN420 EN388 EN407

6 7 8 9 10 11

12 Pairs (blister)
144 Pairs



GUANTES



C CUT RISKS | GRIP | WATERPROOF | OIL

EN388 6 7 8 9 10 11

4X43C

64-23. DryCut NITRILE

Anti-cut and waterproof glove C

- All covered by NITRILE
- Ideal oils or wet environment

EN420 EN388

12 Pairs (blister)
144 Pairs



C CUT RISKS | GRIP | WATERPROOF | OIL | THERMAL

EN388 6 7 8 9 10 11

4131C

EN407 X1XXXX

64-24 DryCut-N NITRILE

Anti-cut and anti-heat glove C

- Resists contact heat 100ºC
- Waterproof, ideal for oils
- 18 g extra fine fabric

EN420 EN388 EN407

12 Pairs (blister)
144 Pairs



B CUT RISKS | BREATHABLE

EN388 6 7 8 9 10

4X42B

64-50. PicCut PU

Cut-resistant glove B, PU palm

- NITRILE reinforced thumb
- Without glass fibre
- Extra comfortable non-metallic fabric

EN420 EN388

12 Pairs (blister)
144 Pairs



D CUT RISKS | GRIP

EN388 7 8 9 10

4X42D

64-31. RobustoLux PU

13G anti-cut D, NITRILE on palm

- Thumb reinforced with PU
- Very good grip: non-slip
- Max abrasion-tear resistance

EN420 EN388

12 Pairs (blister)
144 Pairs



D CUT RISKS | GRIP

EN388 7 8 9 10

4X43D

64-10. BladeLux PU

Anti-cut glove D, PU on palm

- Reinforcement pads
- Ideal for handling heavy parts

EN420 EN388

12 Pairs (blister)
144 Pairs



D CUT RISKS | GRIP

EN388 7 8 9 10

4X42D

64-40. GripCut NITRILE

13G anti-cut D, NITRILE on palm

- Anti-slip dots
- Excellent grip and durability
- Max abrasion-tear resistance

EN420 EN388 EN407

12 Pairs (blister)
144 Pairs


S1
10
dyneema
diglitx



B CUT RISKS | GRIP

EN388 8 9 10

3X43B

GLFK-5. Rubber 5 LÁTEX

Composite and latex anti-cut B

- Covered 3/4 rough latex
- Excellent grip

EN420 EN388

12 Pairs (blister)
120 Pairs



B CUT RISKS | BREATHABLE

EN388 7 8 9 10

4X43B

GNFD16. Light Task PU

Nylon, spandex and PU anti-cut B

- PU coated up to the knuckles
- Ultra-thin and breathable

EN420 EN388

12 Pairs (blister)
120 Pairs



C CUT RISKS | BREATHABLE

EN388 7 8 9 10

4X42C

G150KV. Task-5 PU

Silicon fibre and PU anti-cut C

- Granular finish on palm
- Good adhesion in oils

EN420 EN388

12 Pairs (blister)
120 Pairs



C CUT RISKS | GRIP

EN388 8 9 10

4X42C

G151KV. Bladex 5 NITRILE

HPPE and NITRILE fibre anti-cut C

- High abrasion-tear resistance
- Nylon-lycra support

EN420 EN388

12 Pairs (blister)
120 Pairs



B CUT RISKS | GRIP

EN388 7 8 9 10

3341B

G150GD. MetalGrip HPPE

Anti-cut B, HPPE and fibre glass

- Polyester and spandex base
- Very flexible
- Waterbase PU coated

EN ISO 21420 EN388

12 Pairs (blister)
120 Pairs



EN1082 8 9

G253. NK-Cote

Mesh glove for food

- For cut of meat or fish
- Ambidextrous, reversible. 220 mm

EN1082

1 UNIDAD
PRECIO UNIT.



EN1082 9

G253L. NK-Cote largo

Guante de malla For alimentac

- For cut of meat or fish
- Ambidextrous, reversible. 320 mm

EN1082

1 UNIDAD
PRECIO UNIT.



EN388 2040 EN407 44XX34 10

24160. Alupro

Giamte aluminised, ambidextrous

- Anti-cut and anti-caloric 500ºC
- 400 mm. Ideal for cast metal

EN420 EN388 EN407

1 PAIR



EN388 1X2XC EN407 X1XXXX 10

Available lengths

38 CM GSLKW14

45 CM GSLKW14-H45

GSLKW14. Formida sleeves

Anti-cut and anti-caloric sleeves. Available in different sizes

- Contact heat resistant up to 100ºC
- Level C anti-cut. Washable and resistant to sparks or heat.

EN420 EN388 EN407

1 PAIR
12 Pairs



EN388 4X43E 7 8 9 10

G239. PicGuard

Anti-puncture-antitch glove

- 100% polyamide
- Ideal drilling risks

EN420 EN388

1 PAIR



EN388 1231X | EN407 X2XXXX | 10

EN388 | THERMAL

6 Pairs
60 Pairs

G223. TerryTop Glove

Heat-resistant baker's glove

- Heat resistance up to 250ºC
- 100% cotton
- Ideal for bakeries or catering
- Anti-cut and anti-caloric 250ºC
- Ideal for handling hot solids
- Length: 37 cm
- 16 cm cuff

EN420 EN388 EN407



EN388 2X32C | EN407 X2XXXX | 10

EN388 | THERMAL | C CUT RISKS

6 Pairs
36 Pairs

G406. TerryTop Mitt

Anti-heat baker's mitt

- Anti-cut and anti-caloric 250ºC
- Cotton
- Ideal for bakeries or industry
- PVC coating For better sealing
- Ideal for handling hot solids
- Length: 40 cm

EN420 EN388 EN407



EN388 1X3XC | EN407 X1XXXX | 9

EN388 | THERMAL | C CUT RISKS

10 Pairs
100 Pairs

G625. Terry Mix

Anti-cut C and anti-caloric 100ºC

- Cotton and polyester
- Ideal for hot cutting parts

EN420 EN388 EN407



EN388

4X42B

9

B
CUT RISKS

GZAVG. Glovezilla

Anti-vibration glove

- Chloroprene palm
- Ideal vibrating tools

EN420 EN388 EN10819

1 PAIR



10

80101. Wristband

Velcro wrist strap

- Padded palm
- Prevents wrist injuries

Minimal risks

1 PAIR
12 Pairs



9

G080. Light Forde

Very fine cotton glove

- Avoid leaving a footprint
- Sensitive handling

Minimal risks

12 Pairs
120 Pairs



9

G093. TricoFlex

Cotton and polyester glove

- Ambidextrous, elastic
- Valid for use under other gloves

Minimal risks

12 Pairs
300 Pairs



7 9

G095. TricoTex

Polyester glove

- Ambidextrous, elastic
- Valid for use under other gloves

Minimal risks

12 Pairs
300 Pairs



EN388

214XX

8 9 10

G112. Dotty Blue

Nylon with PVC speckles

- Avoid leaving a footprint
- Anti-slip

EN420 EN388

12 Pairs (blister)
120 Pairs

Cold gloves

Thermal risk of cold





G114FB. Dorneda Black

Thermal cotton lined cowhide leather glove

- Good feel and flexibility
- Elastic on the back for better fixation
- Winter inner lining
- Supplied in blister packs
- Minimal risks
- Made of water-repellent leather

9 10 11

12 Pairs
120 Pairs



G114F. Dorneda PIEL

Full grain cowhide leather glove

- Lined with thermal cotton
- Ideal for low temperatures
- **Minimal risks**
- Made of water-repellent leather
- Inner thermal lining
- Presentation individual blister pack

10

6 Pairs
60 Pairs



EN388 2121X | EN511 120 | 8 9 10

G691. IceGrip PVC

PVC and nylon, food grade

- Thinsulate 40 g inner lining
- Length 33 cm. Rough palm

EN420 EN388 EN511

10 Pairs
100 Pairs

EN388 4221X | EN ISO 374-5 VIRUS | EN ISO 374-1 Tipo A AJKLNOT | EN511 121 | 10



G2006. Winter Pro PVC

PVC glove with cotton lining

- Waterproof
- Ideal chemicals and oils
- Length: 26.7 cm
- Rough finish: grip
- Extra thick: 1.4 mm
- Against a multitude of chemicals
- Low temperature certificate

EN420 EN388 EN374 EN511

5 Pairs
50 Pairs



Thermals

With inner lining





EN388 COLD WATERPROOF OIL

EN388
7 8 9 10 11
4121X

60-52. ScandiLux de Digitx NITRILE

Water-repellent NITRILE glove

- All coated
- Special thermal lining
- Ideal in cold or wet environments
- Water and oil repellent

EN420 EN388

12 Pairs (blister)
120 Pairs



EN388 COLD WATERPROOF OIL

EN388 EN511
7 8 9 10 11
2131X X20

G308. ThermoFoam LÁTEX

Microporous waterproof latex glove

- Special thermal lining
- Ideal in cold or wet environments
- Water and oil resistant

EN420 EN388 EN511

12 Pairs (blister)
120 Pairs

Cryogenic

Valid For liquid nitrogen



EN388 2122 | EN511 341 | EN407 X2XXXX | 9 10

G184. CryoLite

Cryogenic water-repellent full grain leather glove

- Certified for extreme cold and liquid nitrogen
- Heat resistant up to 250ºC
- Cold resistant down to -195.82ºC
- Includes polyolefin Porelle membrane

EN420 EN388 EN511 EN407

1 PAIR
5 Pairs



EN388 1242 | EN511 241 | 10

G645. CryoPlus

Cordura and Porella Cryogenic Glove

- Triple polyester internal insulation
- In Cordura fabric, a symbol of durability
- Includes polyolefin Porelle membrane
- Against liquid nitrogen splashes
- Special laboratories
- Length 400mm
- Up to -195.82ºC

EN420 EN388 EN511

1 PAIR
5 Pairs


FALL PROTECTION





Categories of work at height

Standard	*Description*
EN341	Descent device for rescue
EN353-1	Guided type fall arresters on rigid anchor line
EN353-2	Guided type fall arresters on flexible anchor line
EN354	Lanyards
EN355	Energy absorbers
EN358	Belts for fastening/restraint and securing lanyards
EN360	Retractable fall arresters
EN361	Anticaid harnesses
EN362	Connectors
EN567	Blockers
EN795	Anchoring devices
EN813	Seat harnesses
EN1496	Lifting rescue harnesses
EN1497	Arneses de rescate
EN1498	Rescue tapes
EN1891	Braided ropes with sheath, semi-static
EN12278	Pulleys

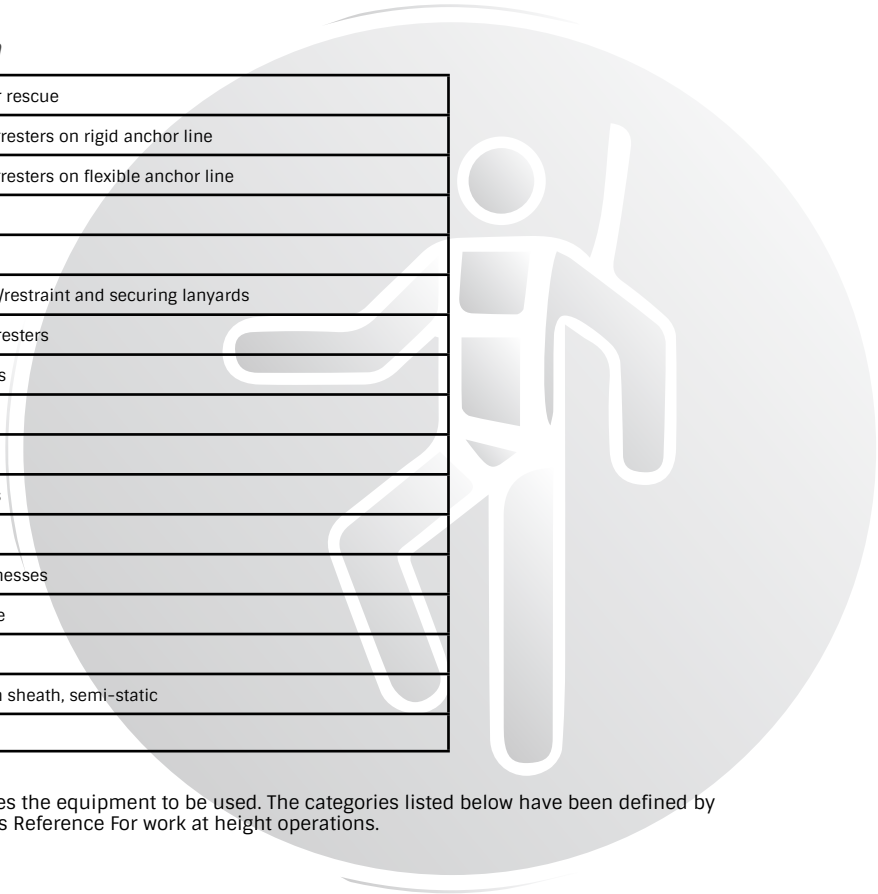

The type of work at height determines the equipment to be used. The categories listed below have been defined by European standards and are used as Reference For work at height operations.

ANTICAIDS

Equipment used to arrest the fall of a worker from an elevated position. The usual fall arrest system consists of the following elements:

* Anchorage devices.
* Fall arrest body harness.
* Fall arrest devices.

RESCATE

The rescue and evacuation of an injured worker at height is a mandatory consideration. The usual rescue system consists of the following elements:

* Rescue and evacuation device.

WORKING POSITION

Equipment that holds an operator in place at the workplace while providing mobility for his hands.
The usual work positioning system consists of the following elements:

* Anchorage devices.
* Full body harness with positioning belt.
* Connecting devices (positioning lanyard).

SUSPENSION WORK

Designed to allow operators to work suspended without foot support while still having the mobility of their hands. The usual suspension system consists of the following elements:

* Anchorage devices.
* Full body fall arrest harness.
* Two ropes.
One equipped with a descender blocker.
One equipped with a sliding fall arrester.

WORK IN RESTRAINT

Equipment used to prevent the worker from being in a position where there is a risk of falling. The usual restraint system consists of the following elements:

* Anchorage devices.
* Restraint belt or full body harness.
* Connecting devices (lanyard restraint element).

Fall arrest systems are elements which, when properly combined and used, serve to prevent falls and minimise their damage in the event that they are unavoidable. For them to be fully useful we must use each element for what it is specified. They are class III protective equipment and there are different standards depending on the use to which the element is to be put.

* Positioning and suspension fall arrest systems are not designed for fall arrest.
They must be used in conjunction with a fall arrest system.

Main components of a fall arrest system

The main components of a fall arrester system are the bases comprising three elements: "ABC". Without one of the components, the safety chain is not secured.

ANCHORING DEVICES

Definition: they are used to connect the connector (lanyard, fall arrester) to the anchorage (structural profile or other anchorage structures).

Anchorage devices can be of 2 types:
* Permanent anchorage devices (e.g. horizontal lifeline, horizontal rail system, etc.).
* Restraint belts do not constitute a fall arrest system.

COMPLETE FALL ARREST HARNESS

Definition: Body pressure device intended to support the body during and after a fall.

* A full body harness must be worn in all situations where there is a risk of falling.
* Restraint belts do not constitute a fall arrest system.

CONNECTING DEVICES

Definition: they are used as intermediate devices linking the worker's harness to the anchorage device (e.g. lanyards, energy absorbers, fall arresters, locking devices, etc.).

Attachment devices can be of two types:
* Fall restraint: a restraint system prevents the worker from being placed in a position of risk.
* Fall restraint: a fall arrest system does not prevent the worker from reaching a hazardous situation, but protects the worker in the event of a fall.

What type of harness should I choose?

TYPE OF HARNESS	Work in restraint	European regulations	Positioning of work	Anti-fall safety	Work in suspension
Positioning belt	EN358	YES	YES	-	-
Anti-fall harness	EN361	YES	-	YES	-
Anti-fall harness	EN361/EN358	YES	YES	YES	-
Multifunctional fall arrest harness	EN358/EN813/EN361	YES	YES	YES	YES

How many attachment points do I need?

1 OR 2 ANTI-FALL POINTS	1 OR TWO FALL ARREST POINTS + 2 ATTACHMENT POINTS	1 OR TWO FALL ARREST POINTS + 2 ANCHORAGE POINTS + 1 POINT SUSPENSION POINT
DORSAL EXTERNAL	SIDE	VENTRAL

Fall Arrest Harnesses

Basic fall arrest harnesses from 1 to 4 points

1PT



80050. Ancares

EN361

1PT



80055. Gredos

EN361

2PTS



80071B. Trevinca

EN361

3PTS



80070B. Teide B

EN361

3PTS



80071. Tibet

EN361
140 kg

SIZE M-XL Ref. 80071

SIZE 2XL Ref. 80071-XXL

Valid for rescue

HARNESSES EN361 Y EN1497



80091J. Nepal J

Full body fall arrest harness that combines the details of premium harnesses

- Multifunctional: For descent or bindings
- Built-in fall indicator
- Click-type quick-release buckles
- For salvage certificate
- Protected marking with rigid label
- Weight: 1315 g
- Padded leg loops
- Easy to install

EN361 EN1497



80088J. Sajama J

ELASTIC full body fall arrest harness with two anchorage points

- A dorsal point and a frontal point
- Metal rings
- Elasticated upper shoulder straps
- Adjustable shoulder and leg straps
- For salvage certificate
- Weight: 1220 g

EN361 EN1497

SAFETOP SERIES

Positioning

Fall arrest harnesses according to EN361 and EN358



4 PTS



80069B. Serpe

EN361 EN358
140 kg

4 PTS



80072. Makalu

EN361 EN358

CINTAS ELÁSTICAS

5 PTS



80073. Caurel

EN361 EN358

ELASTIC TAPES

5 PTS



80080. Robson

EN361 EN358

5 PTS



80074. Kamet

EN361 EN358

SIZE M-XL	Ref. 80074
SIZE 2XL	Ref. 80074-XXL

Seat harnesses

And positioning

5 PTS



80077. Bihor Plus

EN361 EN358 EN813
140 kg

5 PTS



80086. Kailas

EN361 EN358 EN813
140 kg

5 PTS





with
FAST BUCKLES

+SALVAMENTO



80077B. Teleno

EN361 EN358 EN813 EN1497

6 PTS



80087. Kutang

Multifunctional harness for positioning and rope access work

- 1 dorsal point
- 1 front ring
- 2 side rings
- 2 evacuation points
- 2 points on belt
- Padded leg loops
- Adjustable. Great comfort
- Weight: 2550 g

EN361 EN358 EN813
150 kg

5 PTS



80082B. Aoraki

EN361 EN358 EN813

5 PTS



80079. Siwalik

EN361 EN358 EN813
140 kg

5 PTS



80082. Domaio

EN361 EN358 EN813
140 kg

5 PTS

VALID
for RESCUE



80076B. Bihor B

EN361 EN358
EN813 EN1497

5 PTS



80076. Bihor

EN361 EN358
EN813
140 kg

SIZE M-XL	Ref. 80076
SIZE 2XL	Ref. 80076-XXL



Special harnesses

Easy-to-wear waistcoat type



2 PTS

ONLY 1.200 GRAMOS



CORDURA RINGS NON METALLIC

QUICK BUCKLES



SANITY RINGS



SIZE M-XL	Ref. 80089
SIZE XXL	Ref. 80089-XXL

80089. Winx

Ultralight waistcoat harness

- Cordura® front and back attachment points
- Very high resistance
- The only metal parts are adjustable buckles and automatic buckles.
- Excellent fit and mobility
- Circular seams, strength in all directions

EN361

3 PTS



80084. Faro

EN361
140 kg

4 PTS



80060. Ural ELECTRICISTS

EN361 EN358

2 PTS



80040. Snowdon

Harness with high visibility jacket

SIZE M-XL	Ref. 80040
SIZE 2XL	Ref. 80040-XXL

- Waterproof
- Windbreaker
- Zippered pockets
- 2-point harness

EN361
140 kg

2 PTS

Sewn with Kevlar® and Nomex®



80271. Mackinley Flame retardant

EN361

Belts

Positioning





80085. Yangra Plus

Strap-belt with 3 points

- 3 tool loops
- Adjustable
- Including ring adjustment set
- Quilting

EN358 EN813



80075. Yangra

Strap-belt with 3 points

- 3 tool loops
- Adjustable
- Very light
- Quilting

EN358 EN813



80048P. Devesa

2 point girdle belt

- For work on fixation
- Adjustable
- Very light
- Quilting

EN358

Work chairs

Positioning



81302. Safetop Chair

Rescue chair 530x190 mm

- Padded seat
- Adjustable straps
- 3 tool loops
- Aluminium internal structure



81303. Silla SafePlus

Rescue chair 535x270 mm

- 18 mm rigid base
- Lined with polyester fabric
- 4 side adjustment straps
- Adjustable lumbar belt



80143. Tri-Resc

Rescue triangle 670x1310 mm

- Elastic bands
- Polyester
- For evacuation of persons
- Colour Yellow

EN 1498 Class B

Connecting ropes

Different sizes and carabiners



25KN
AP. 19

1M Ref. 80103

1,5M Ref. 80105

Rope with 2 carabiners 80112J

12 mm EN354 EN362



22KN
AP. 16

1M Ref. 80106P-1

22KN
AP. 52

Rope with 2 carabiners 80112J

10,5 mm EN354 EN362



1,7 M

Ref. 80107

ADJUSTABLE

Rope without carabiners

12 mm EN354 EN 358



25KN
AP. 19

1,7 M

Ref. 80108

ADJUSTABLE

25KN
AP. 50

Rope with carabiners

12 mm EN354 EN358



1 M

Ref. 80102

1,5 M

Ref. 80105-SM

Rope without carabiners

12 mm EN354

SAFETOP SERIES

Elastic bands

Different sizes



1 M
Ref. 80160

1,5 M
Ref. 80161

2 M
Ref. 80162

Elastic band

EN354



20KN
AP. 64

1,5 M
Ref. 80164

Elastic band

EN354 EN362

VALID
FOR ALPINISM



0,6 M
Ref. 80276

0,8 M
Ref. 80278

1,5 M
Ref. 80279

Closed sling

EN354 EN566
EN795 (Class B)

VALID
For ALPINISM

15 CM

Ref. 80320



Closed sling

EN354 EN566

VALID
For ALPINISM

VALID
MOBILE DEVICE
ANCHORING



0,8 M

Ref. 80178

1,5 M

Ref. 80179

Closed sling

EN354 EN566 EN795

100 CM

Ref. 80177



Lashing sling

EN795

1,5 M



80226.
Double rope

EN354

REG
1,98 M



80215.
Adjustable rope

EN355 EN354
EN 362

REG
1,98 M



80216.
Adjustable rope

EN355 EN354
EN 362

1,8 M



80163.
Elastic band

EN355 EN362

Positioning

EN358



3 M	Ref. 80240
4 M	Ref. 80241
5 M	Ref. 80242

Positioning rope

Climbing chair in different sizes

- 12 mm rope
- 70 cm cover
- With altochut, adjustable
- With carabiners 80111 and 80112


EN358 EN362



80270. Climbing grill

- 14 mm rope
- 70 cm cover

EN358

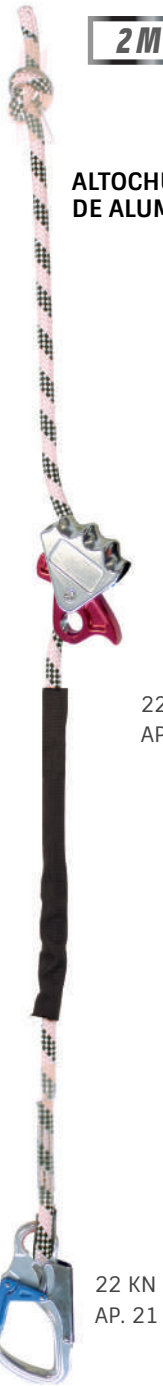

80270B. Climbing grill

- 12 mm rope
- 70 cm cover

EN358



Steel cable grill


- 16 mm rope
- 70 cm cover

EN358

2 M Ref. 80270-A2

3 M Ref. 80270-A3

5 M Ref. 80270-A5

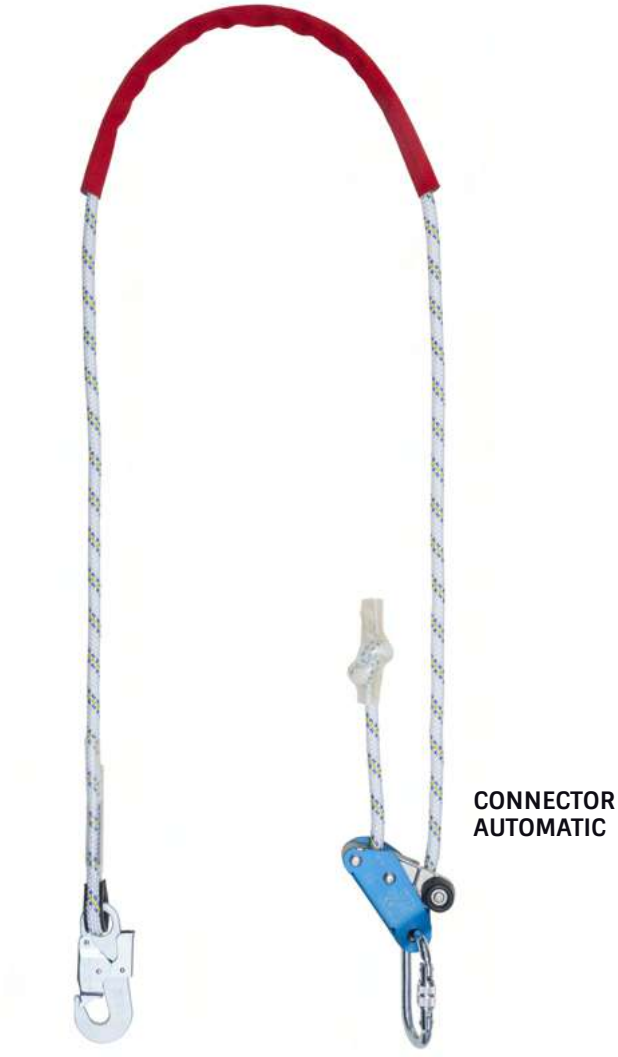

CONNECTOR AUTOMATIC

Climbing grill

- Ø 12
- Max. 140 kg

EN358

0,9 M Ref. 80321

1,2 M Ref. 80322

1,6 M Ref. 80323



80321. Anchor strap

EN795/B

Double strings

Wide range of double ropes, with and without shock absorber and with or without carabiners.

1,80 M



80229J. Super Maxi Double Rope

- Includes energy absorber
- Includes 2 carabiners
- Aluminium carabiners
- Carabiners 110 mm

EN355 EN354 EN362

REG 1,5 - 2 M



80224J. ADJUSTABLE double strap

- Includes energy absorber
- Including steel carabiners
- Carabiner opening 50 mm

EN355 EN354 EN362

1,82 M



80224. Double tape 1,82 m

- Includes energy absorber
- Including steel carabiners
- Carabiner opening 50 mm

EN355 EN354 EN362

1 M



80227BJ. Double tape 1 m

- Includes energy absorber
- Including steel carabiners
- Carabiner opening 50 mm

EN355 EN354 EN362

1,72 M



80227. Double tape 1,72 m

- Includes energy absorber
- Incluye 3 mosquetones de acero
- Ap. mosquetones grandes 50 mm
- Ap. mosquetón rosca 19 mm

EN355 EN354 EN362

2 M



80225. Double flame-retardant rope

- Includes energy absorber
- Including steel carabiners
- Ap. large carabiners 56 mm
- Right carabiner clip 19 mm

EN355 EN354 EN362 EN358

1,50 M



80227-SA. Double rope

- Without energy absorber
- Includes 3 steel carabiners
- Ap. large carabiners 54 mm
- Carabiner hook thread 32 mm

EN354 EN362

2 M



80220. Double Rope Maxi

- Includes energy absorber
- Includes 3 steel carabiners
- Ap. large carabiners 83 mm
- Ap. hook dcho 19 mm

EN355 EN354 EN362

0,9 M



80228B. Double elastic band

- Includes energy absorber
- Includes 3 steel carabiners
- Ap. large carabiners 56 mm
- Ap. hook dcho 19 mm

EN355 EN354 EN362

1,78 M



80228. Double elastic band

- Includes energy absorber
- Includes 3 steel carabiners
- Ap. large carabiners 50 mm
- Carabiner hook 19 mm threaded

EN355 EN354 EN362

1,80 M



80331. Retractable rope

- With energy absorber
- Ultra light
- With aluminium hooks
- With swivel carabiner

150 kg

EN360

1,80 M



80332. Double retractable rope

- With energy absorber
- Ultra light
- With aluminium hooks
- With swivel carabiner

150 kg

EN360

ENERGY ABSORBERS


Absorbers



80217P. Absorber-Pack

- Mini, only 330 mm

EN355

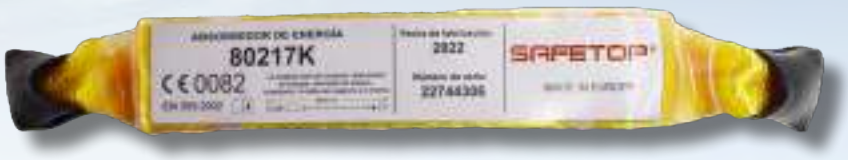


80217K. Ultra-short absorber

- Ultra short, only 235 mm

EN355

Altochuts

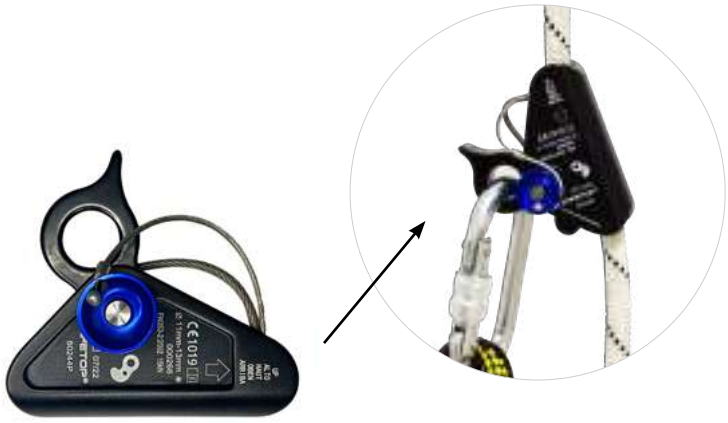

80244P. Altochut aluminium

- For 12 mm rope, aluminium
- Fall arrester, ascender and descender
- Certified as a slider
- Extra light

EN353-2



80248. Altochut multifunction

- For 12 mm rope, aluminium

* For descending
* For positioning
* And as altochut


EN353-2 EN358 EN12841/A



80243. Rope blocker

- For 8-12 mm rope
- Aluminium
- Matt finish

EN567

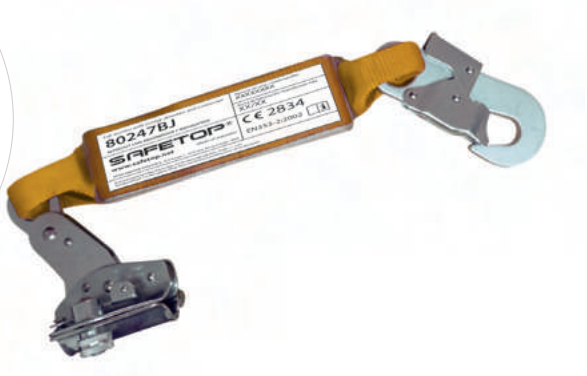

80247BJ. Altochut + absorbedor

- Absorber and altochut
- With carabiner 80111
- For 14-16 mm rope

EN353-2

Horizontals



1 USER

Rope 10.5 mm

- With hook
- Hook opening 19 mm
- Horizontal works

EN795 B

5M	Ref. 80250
10 M	Ref. 80251
20 M	Ref. 80252
30 M	Ref. 80353



UP TO 2 USERS

Sling 2 users

- 20 metre horizontal lanyard
- Supplied with rucksack
- Horizontal works

EN795/B
CEN/TS 14615:2013/C

20 M	Ref. 80266-20
20 M	Ref. 80266-20M With two carabiners 80112J



UP TO 3 USERS

80266. 3-user lanyard

20 M

- 20 metre horizontal lanyard
- Horizontal works

EN795
CEN/TS 14615:2013/B



UP TO 3 USERS

80266-30. 3-user lanyard

30 M

- 30 metre horizontal lanyard
- Without carabiners
- Horizontal works

EN795
CEN/TS 14615:2013/B

Verticals



Rope 12 mm

- Without carabiners
- A knotted end
- Other end with eyelet

EN353-2

10 M	Ref. 80350-10
20 M	Ref. 80350-20
30 M	Ref. 80350-30
40 M	Ref. 80350-40
50 M	Ref. 80350-50
100 M	Ref. 80356



Cuerda 14 mm

- With hook
- Hook opening 19 mm
- Other end with eyelet

EN353-2
EN 358
EN 12841

10 M	Ref. 80151
20 M	Ref. 80152
30 M	Ref. 80153
40 M	Ref. 80154
50 M	Ref. 80155



Rope 12 mm

- 2 screw snap hooks
- Ap. 19 mm, steel
- Aluminium Altochut
- Energy absorber

EN353-2

5M	Ref. 81231-5
10 M	Ref. 81231
20 M	Ref. 81232
30 M	Ref. 81233



Rope 12 mm

- 2 steel hooks
- Steel Altochut
- Absorber


EN353-2

40 M	Ref. 80234
50 M	Ref. 80235
70 M	Ref. 80237
80 M	Ref. 80238


SAFETOP
Fit-o-lite
stringe
G102
4131X

Cable lifelines

Permanent stainless steel wire rope lifelines

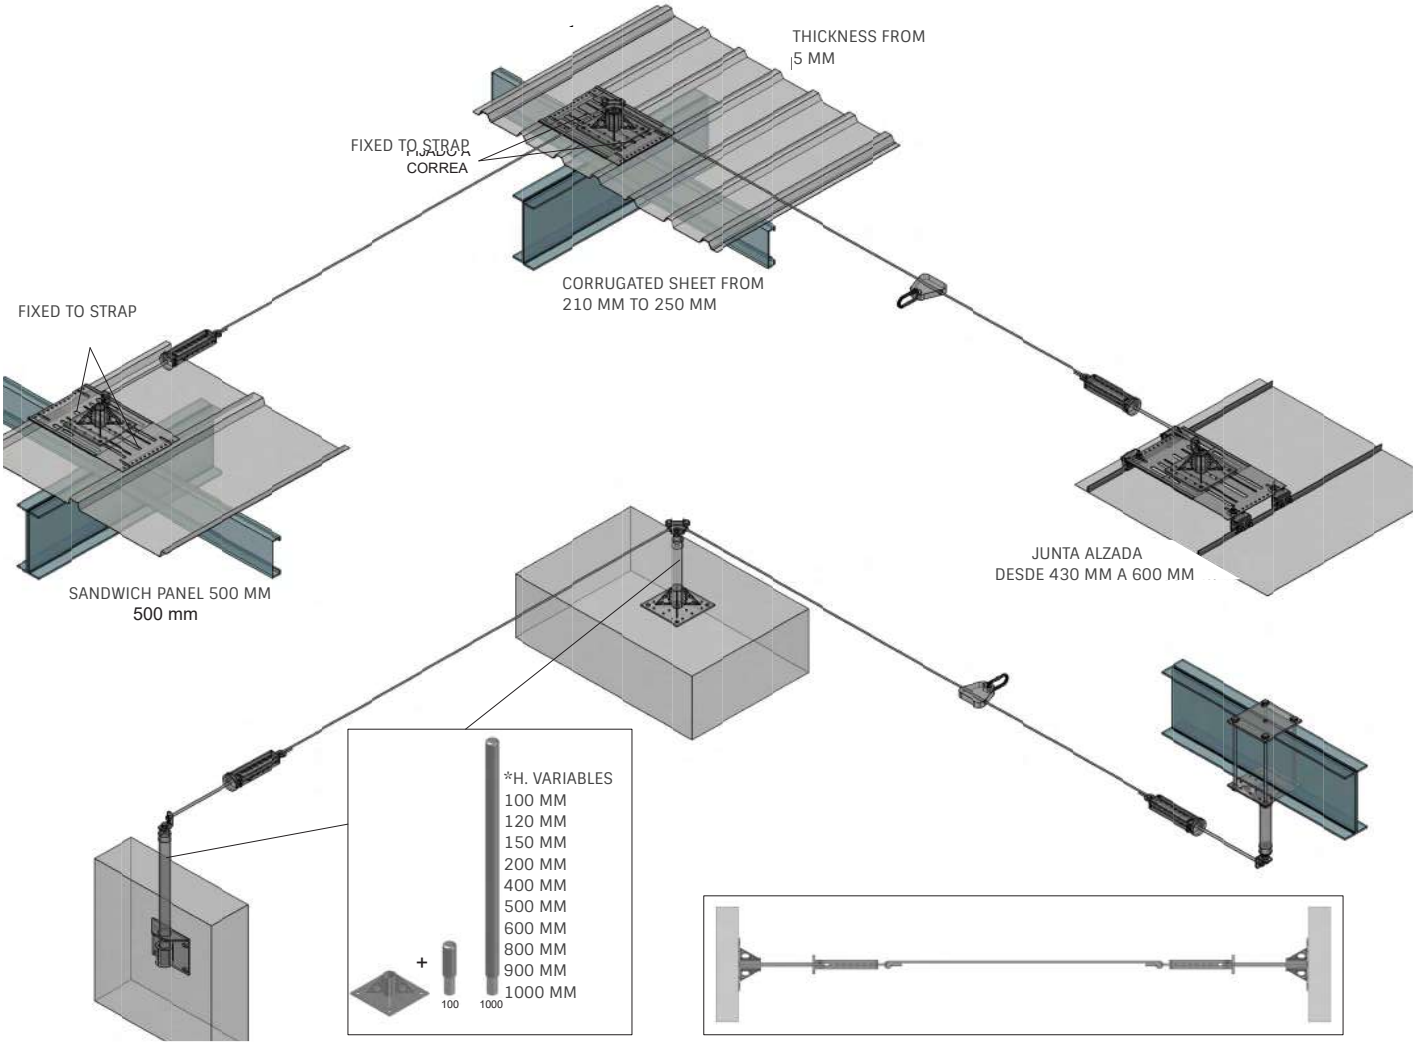

80190. Cable lifeline kit

4 USERS

- Cable lifeline. Installation required.
- Available in 3 lengths: 10 m, 20 m, 30 m with installation kit.
- It is supplied with brackets, separators, cable and other necessary accessories for installation and commissioning.
- Easy assembly with only 1 key.
- Multi-purpose anchoring brackets For different metal roofs.

EN 795
AISI 316 / 304

10 M 80190-10

20 M 80190-20

30 M 80190-30

Rope per metre

Sale per metre



200 M




80301. Rope per metre 11 mm

- SEMI-STATIC braided
- Diameter 11 mm
- Polyester/polyamide
- For vertical works
- Ideal for tree work
- Resistance knot 8:>15Kn

EN1891 (Class A)

Protectors

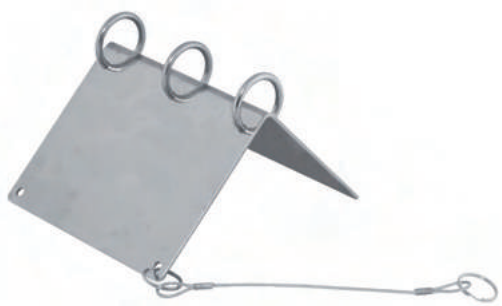

80205. Lifeline Protector

- Stainless steel
- Ideal for roofs or decks
- Dimensions 180x175,5 mm



80208. Set protector

- Made of aluminium and stainless steel
- Set of 3 modules
- Dimensions 119x300 mm



50 CM Ref. 80209

100 CM Ref. 80211

PVC protector

- For ropes case
- PVC
- Prevents wear and tear



Accessories



80202-B. Anti-trauma tapes

Anti-trauma straps built into case

- 100% polyester
- Colour black
- Belt width 20 mm
- Maximum length from 1050 mm to 1200 mm



80149. Ascent pedal

- Adjustable
- With step reinforcement
- Elastic
- Hebilla doble

80202. Anti-trauma tape

- Anti trauma
- Length 120 cm
- Polyamide



80201. Tape scale

Treadmill ladder with five rungs

- 100% poliéster
- Colour black
- Belt width 27 mm
- 145 g





80133. Descender 8

- Manual descender for rescue
- Very light 124 g
- Aluminium



80129. Descender Wings

- Manual descender For rescue
- Very light 132 g
- Aluminium



80127. Pulley for Tyrolean traverse

- For 13 mm rope
- For cable up to 12 mm
- Resistance 25 Kn
- With retaining ball

EN12278



80135 (RIGHT) and 80136 (LEFT)

- Aluminium handles
- For promotion/descent
- For 9 to 13 mm ropes

EN12278

Anchorages



Ref. 80134-P:
Pillow



80134. Permanent anchoring

Made of steel. Suitable for vertical, horizontal or ceiling mounting, 140x53x64 mm.

- For M12 screws
- Resistance 12 kN

EN 795 (Class A1)



80144-12. Permanent anchoring

Made of stainless steel. For vertical or horizontal use, 56x56x50 mm

- For screw M12 (included)
- Resistance 12 kN

EN795 (Class A)



80159. Permanent anchoring

Made of steel. For fixing to vertical, horizontal or inclined structures.

- Galvanised steel
- Resistance 12 kN

EN795 (Class A)



80000. Mobile anchor point

Made of steel. Transportable, suitable for rails from 65 to 120 mm.

- Galvanised steel
- Resistance 10 kN

EN795 (Class B)



80150-12. Permanent anchoring

Made of stainless steel. For vertical or horizontal use, 56x56x50 mm

- For screw M12 (not included)
- Resistance 12 kN

EN795 (Class A)

3 USERS



80158A. Set for steel

Set permanent anchorage set for STEEL structures, 135x140 mm

- Vertical, horizontal or inclined
- Resistance 30 kN, 3 users

EN795 (Class A)

3 USERS



80158H. Set for concrete

Permanent anchoring set for CONCRETE structures, 240x240 mm

- Vertical, horizontal or inclined
- Resistance 30 kN, 3 users

EN795 (Class A)

3 USERS



80145. Anchor plate

Stainless steel, Ø16 mm, 70 mm opening.

- Vertical, horizontal or inclined
- Valid for 3 operators

EN795 (Class A) CEN/TS 16415

VÁLIDAS For SU USO CON LÍNEA DE VIDA HORIZONTAL 80266 (3 USERS)



80277. Adjustable bar

Adjustbale security bar for fitting to frames or windows

- Galvanised steel
- 1,50 x 4 cm

EN795 (Class B)



80274. Anchoring claws

Anchoring device for adapting to aluminium beams

- Two claws, one movable and one fixed
- Aluminium

EN795 (Class B)

Ref. 80189 ***WITH SCREWS***



80188. Anchorage for sheet metal

Multi-user anchor set with rivets included

- Up to 3 users
- Ø 45 mm
- 30 kN
- Available with screws with Reference 80189

EN795 CEN/TS/16415



80184. Square anchor

Fastening element for attaching the ends of the fall arrester to the host structure.

- 30 kN
- 240x240x68 mm
- 360º turn

EN795 (Class A y C)

3 USERS



80165A. Metal structure anchoring set

For fixing concrete structures and steel structures

- 30 kN
- 150x150mm
- Including nuts

EN795 (Class A)

3 USERS



80165H. Concrete anchor set

For fixing concrete structures and steel structures

- 30 kN
- 150x150mm
- Includes HILTI anchors

EN795 (Class A)



2 M Ref. 80147

80146. Permanent anchor point

Steel. Attach the fixed damping component of the linkage to the fixed structure point.

- Ø 8 mm
- 1 m
- 30 kN

EN795 (Class B)

10 M Ref. 80401
20 M Ref. 80402
30 M Ref. 80403



80401. Vertical textile anchor

For vertical use with multiple anchor points every 1.5 m

- Includes carabiner
- Of banded polyester tape
- Exposure to falling water levels

EN795 (Class B)

0,7 M Ref. 80181
1,5 M Ref. 80182
2,5 M Ref. 80183



80181. Anchor strap

Mechanical fixing anchor For ceiling or wall installation

- In reinforced concrete structures
- Insure at Factor 0
- On expansive mechanical dowels

EN795 (Class A)



80187. Anchorage with base and post

Made of steel. For installation against the structure and with fastening element.

- With 40 cm high pole
- 39 mm high structure
- Threaded end

EN795



80191-PA. Surfacer Fastener

Designed for attaching the ends of the fall arrester to a structure

- Possibility of device attachment
- For terrain that does not offer sufficient resistance

EN795 (Class B and C)



80148. Closed anchor point

Made of steel. Anchoring of individual equipment To protect against falls from height

- T-type closure
- Ø 34 mm
- 12 kN

EN795 (Class B)



80191. Slope anchor set

With 1.2m steel spike

- Possibility of device attachment
- For terrain that does not offer sufficient resistance

EN795 (Class B y C)



80191-C

Claw type claw with screw and nut



80191-T

Cable tester



80191-P

Steel pick

Carabiners



80120A. Aluminum carabiner

¼-turn safety locking carabiner

- Aperture 22 mm
- Resistance 22 kN
- ¼ turn

EN362 (Class B) EN12275 (Class H)



80117. Automatic carabiner

Aluminum screw carabiner

- Aperture 22 mm
- Resistance 22 kN

EN362 (Class T)



80113J. SemiMaxi carabiner

Automatic steel carabiner

- Aperture 50 mm
- Resistance 25 kN

EN362 (Class A)





80120J. Aluminum carabiner

Aluminum Trilock carabiner with triple locking mechanism

- Automatic closing
- 22 mm opening
- Resistance: 23 Kn
- Weight: 92 g

EN362 (Class B)



80120B. Screw locking carabiner

Aluminum carabiner with manual locking device

- Manual closing
- 22 mm opening
- Resistance: 23 Kn
- Weight: 87g

EN362 (Class B)





80111. Locking carabiner

Automatic steel carabiner

- Aperture 19 mm
- Resistance 22 kN

EN362 (Class T)



80112J. Screw carabiner

Steel screw carabiner

- Aperture 19 mm
- Resistance 25 kN

EN362 (Class T)



80120. 1/4 turn carabiner

Steel screw carabiner

- Aperture 22 mm
- Resistance 40 kN

EN362 (Class B)



80113A. Mosquetón Maxi

Automatic aluminum carabiner

- Aperture 60 mm
- Resistance 25 kN

EN 362 (Class A)



80114. SuperMaxi carabiner

Automatic aluminum carabiner

- Aperture 110 mm
- Resistance 22 kN

EN 362 (Class A)



80130. Steel fastening

Stainless steel fastening For attaching the fall arrest element to a permanent anchor point

EN362 (Class A and T)

ap. 75mm	ap. 100mm	ap. 140mm
80130	80131	80132

Poles

Y Accessories



+ 80140

+ 80140-5

Telescopic handle

- Fiberglass reinforced
- For placing lifelines
- Rises by tranches
- Must be used with a 80141 hook (not included)
- Served with backpack

5M Ref. 80140-5

8M Ref. 80140

+



80140-U

Head-hook For pole

80140-B

For telescopic pole transport backpack



The pole can be used with anchor hooks, cable installers, acoustic sensors or other devices compatible with the UDI head.

Accessories

For PÉRTIGA



80141. Placement hook

- Hook For telescopic handle
- Steel, opening 65 mm

EN795 (Class B)



80142. Insulated hook

- Hook For telescopic handle
- Steel, INSULATED, opening 65 mm

EN795 (Class B)



0,6 M	Ref. 80296
1 M	Ref. 80296-1

80296. Cable For telescopic handle

- Available in 2 lengths
- Diameter 8 mm, stainless steel, 30 kN
- Two loops: one small and one large

EN795 (Class B)

Retractables



TAPE

6 M	Ref. 80806
10 M	Ref. 80810
15 M	Ref. 80815
20 M	Ref. 80820
25 M	Ref. 80825
35 M	Ref. 80835

Maxiroll. Cable retractable

Galvanized steel wire rope retractile

- Valid for vertical and horizontal use
- Different lengths: from 6 to 35 m (20 to 115 ft.)
- Maximum working load 120 Kg
- Bottom swivel connector

EN 360 EN362 PPE-R/11.060_V1
120 kg



TAPE 15 M

80336-15. Kompakt Plus 15

15 m tape retractable

- Extra resistant cutfiber
- Extra light. Absorber not included
- Swivel lower carabiner

EN360



TAPE 6 M

80336. Kompakt Plus

6 m tape retractable

- Extra resistant cutfiber
- Extra light. Includes absorber
- Swivel lower carabiner

EN360



TAPE 6 M

80336-SA. Kompakt Plus SA

6 m tape retractable

- Extra resistant cutfiber
- Extra light. Without absorber
- Swivel lower carabiner

EN360


MAXIROLL
RETRACTABLE LIFELINE · RETRACTIL
RETRACTABLE LIFELINE · RÉTRACTIL
CABLE LENGTH / LONGITUD CABLE
WIRE DIAMETER / DIÁMETRO CABLE
SERIAL Nº DE SERIE
EN360:2002
RÚ PPE-R/1.1/
SAFETOP
0598
4,8 mm
6 m
80906
dôgrix
Dyflex Coated
cat II

Retractables



10 M	80410-MX
15 M	80415-MX
20 M	80420-MX

CABLE

Stainless steel miniroll

Stainless steel cable retractor

- Different sizes
- Very light and compact
- Swivel lower carabiner

Cable
140 kg
EN360



CABLE 3 M

80207. Retractable Lite

3 m cable retractable

- Swivel top ring
- Includes fall indicator
- Swivel lower carabiner

140 kg
EN360 EN362



6 M	Ref. 81806
10 M	Ref. 81810

CABLE

Traktiroll. Cable retractable

Cable retractable with swivel connectors

- High-strength ABS
- Different lengths: from 6 to 10 m
- Aluminum swivel carabiner
- Internal shock absorber system
- Stainless steel swivel top

100 kg
EN360



CINTA 3 M

80333. Roller-X. 3m tape retractable

Tape retractable with swivel connectors

- Comfortable rubber handle
- Parte superior giratoria de acero inoxidable
- Aluminum swivel carabiner
- Internal shock absorber system

100 kg
EN360



CINTA 2 M

80330. Roller

Tape retractable 2m

- With automatic locking function
- Micro energy absorber
- Swivel lower carabiner

EN360
140 kg



CINTA 2,25 M

80230-N. Roltex

Tape retractable 2,25m

- Ultra-resistant housing
- Built-in energy absorber
- Includes screw top carabiner

EN360
140 kg

Tripods

80371. Safetop Tripod

- Aluminum tripod
- Includes head
- Without transport backpack

EN795 (Class B)



+ COMPATIBLE EQUIPMENT



81372. Safetop lathe

Attaches to the head and to the leg without accessories



80305. Torno Safe

Attaches to the head. To attach it to the leg, will require part 80305-AD



80307. Torno Safe-15



*** Winch and retractable not included.**

2 USERS

MANUFACTURED TO ORDER

80373-2. Tripod spider

- Transportable tripod
- Composed of beam and tripod
- Valid for 2 users, 1000 Kg load
- Incorporates a steel head

EN795 (Class B)



80375. Confined space kit

- Aluminum tripod and winch kit
- 25 m lathe, with crank handle
- Includes carrying backpack

EN795 (Class B)
EN1496 (Class A)



80374. Mobile tripod

- 4 detachable and adjustable cuffs
- Valid for 2 users, 1000 Kg load
- Includes two steel pulleys

EN795 (Class B)






80377. Tripod

- Aluminum tripod
- Height 1.35-2.40 m
- Maximum load 100 Kg

EN795 (Class B)

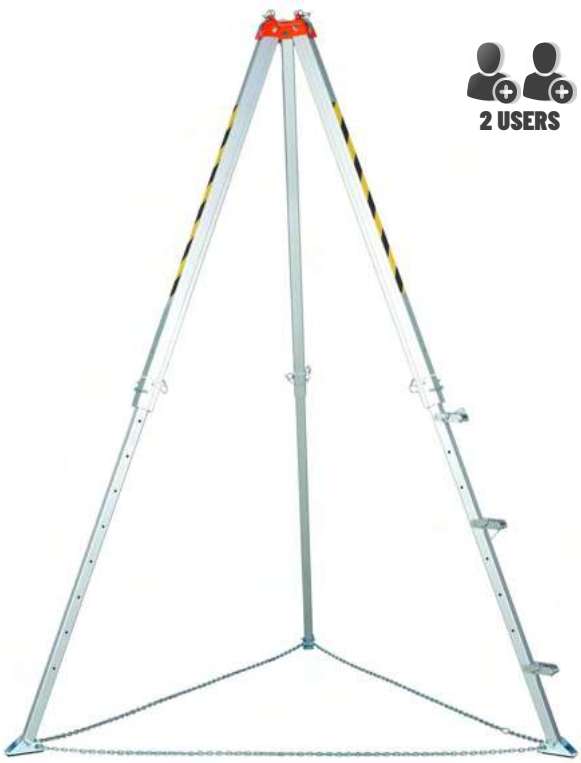

80371-4. Tripod

- Aluminum tripod
- Height 1.79-2.89 m
- Maximum load 13 kN
- Suitable for coupling rescuer

EN795 (Class B)
EN1496 (Class B)



Head with bearings

3 users

Use VERTICAL

MAX Max. load 1000kg

Max. user load 200 kg





Steps aluminum



Feet with rubber pads

80372. Tripod + load

- Lightweight aluminum tripod
- Includes coated head
- Stair treads with keyways
- Steel feet with pads
- Automatic locking pin
- Equipped with 3 anchor points

EN795 (Class B)

Pulleys for tripod



80017. Pulley for tripod

- Aluminum pulley
- Dimensions 85x45 mm
- For ropes <13 mm



80018. Single pulley

- Single aluminum pulley
- Has salvage application
- Dimensions 122x80x38 mm
- Valid for multiple pulleys
- For ropes <15 mm



80027. Pulley for tripod

- Galvanized steel pulley
- Dimensions 133x56x128 mm
- For 12 mm ropes



80019. Double pulley

- Aluminum double pulley
- Dimensions 162x80x63 mm
- For ropes <15 mm



80021. For tripod pulley

- Aluminum pulley
- Dimensions 176x96x88 mm
- For ropes <18 mm



80020. Mini pulley

- Aluminum Pulley For loads
- Dimensions 80x44x37 mm
- For ropes up to 13.5 mm

Lathes

with crank handle



CABLE 25 M

81372. For tripod lathe

- Steel cable reel 25 m
- 6.3 mm diameter
- Rescue device
- Promotion/relegation team
- Accionamiento manual

EN1496 (Type B)
140 kg

+ COMPATIBLE EQUIPMENT



80371. Tripod Safetop
See page 271



80374. Tripod mobile
See page 272



80373-2. Tripod chandelier
See page 271



CABLE 25 M

80305. Torno-Safe 25

- Steel cable reel 25 m
- With rescue lifting device
- Swivel lower carabiner
- High-strength aluminum housing
- Valid as retractable or for rescue

EN1496 (Type B)
EN360
140 kg

+ COMPATIBLE EQUIPMENT

It attaches to the head.
To attach it to the leg, part 80305-AD will require part 80305-AD



80371. Tripod Safetop
See page 271



80374. Tripod mobile
See page 272



80373-2. Spider tripod
See page 271



25 M 80308-25

35 M 80308-35

80308. Rescue Roll

- Retractable cable with hand crank
- Valid as retractable or for rescue
- Includes energy absorber
- Including tripod leg 80377
- Swivel lower carabiner

EN1496 (Type B)
EN360
150 kg

+ COMPATIBLE EQUIPMENT

Attaches to head or tripod leg (adapter included)



80377. Tripod Safetop
See page 273



CABLE 15 M

80307. Torno-Safe15

- 15 m cable retractable, with crank handle
- Valid as retractable or for rescue
- High-strength aluminum housing
- Swivel lower carabiner
- Manual operation

EN1496 (Type B)
EN360

+ COMPATIBLE EQUIPMENT



80371. Tripod Safetop
See page 271



80374. Tripod mobile
See page 272



80373-2. Tripod chandelier
See page 271

Rescue



80311-40. Descent system

- For descent and rescue, 40 m
- Thickness of rope 11 mm
- Max load 200 Kg

EN341 (Class C)



80204. Stirrup strap


- Device for rescue ascents
- 3 attachment points
- Length: 90x34 cm

EN354



80360. Rolling ladder

- 11 m staircase, 37 steps
- Polyamide ropes
- Aluminum rungs
- Max load 120 Kg

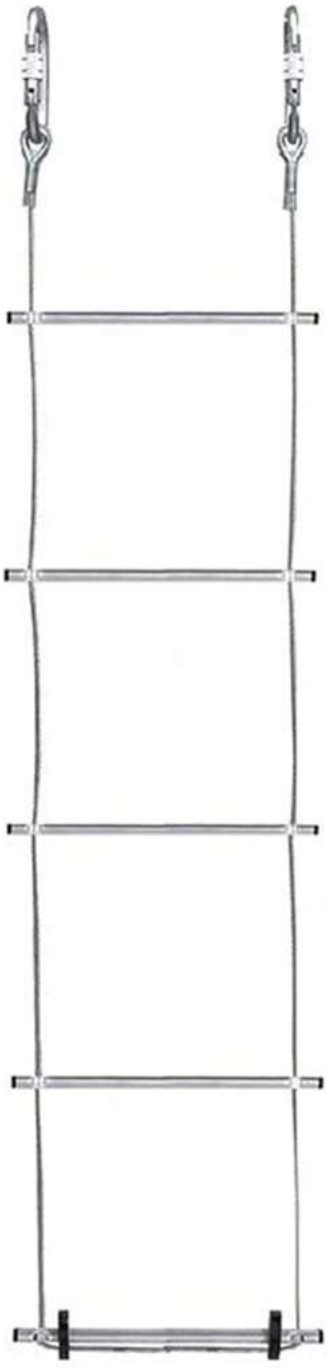

80361. Rolling ladder

- 15 m stairway
- Steel wire rope 4 mm
- Aluminum rungs
- Max load 140 Kg

PN-83/W-52501

Rescue



80380. Rescue stretcher

- Foldable in two directions
- Very easy to transport
- Aluminum structure
- Length: 2.1 m approx.



80381. Rescue kit

- Designed For confined spaces
- Max. load capacity 500 Kg
- Includes:

* Backpack for transport
* Straps for horizontal transport
* 10.5 mm rope - vertical transportation
* Steel carabiner 27 mm opening
* 4 additional supports



Trepolines





80138. Trepolines for wood

For wooden poles

- Waterproof coated fabric
- Aluminium structure

PN-E-55000





80138A. Trepolines for concrete

For vibrated concrete poles

- Waterproof coated fabric
- Steel structure

PN-E-55000

Backpacks

Extra heavy duty backpacks designed
for carrying fall arrest equipment





37x32 cm **80124**

80125 44x37x14 cm

50x38x23 cm **80122**

80125B 47x33x24 cm





Accessories



80199. Tool holders

Medidas 180x80 mm



80198. Tool holders

De poliéster, aprox 95 cm



80167. Working bag

Medidas 300x400 mm



80168. Working bag

Medidas 240x280 mm



1800x230 mm **80123**

For tripod bag

- For tripod bag 2 m
- Dimensions: 1800x230x200 mm
- Waterproof



620x300 mm **80169**

Equipment and rescue bag

- Blue PVC bag
- Dimensions: 620x300 mm
- Ultra resistant



340x230 mm **80170**

Equipment bag

- Adjustable inner lining and height
- Tightening strap with pin
- Waterproof and ultra-resistant



270x620 mm **80173**

Equipment bag

- Multiple gripping points
- Adjustment straps with chest strap
- Large capacity bag



FALL KITS




All our models HERE


Free formation

YouTube

SAFETOP - PPE Manufacturer and Distributor

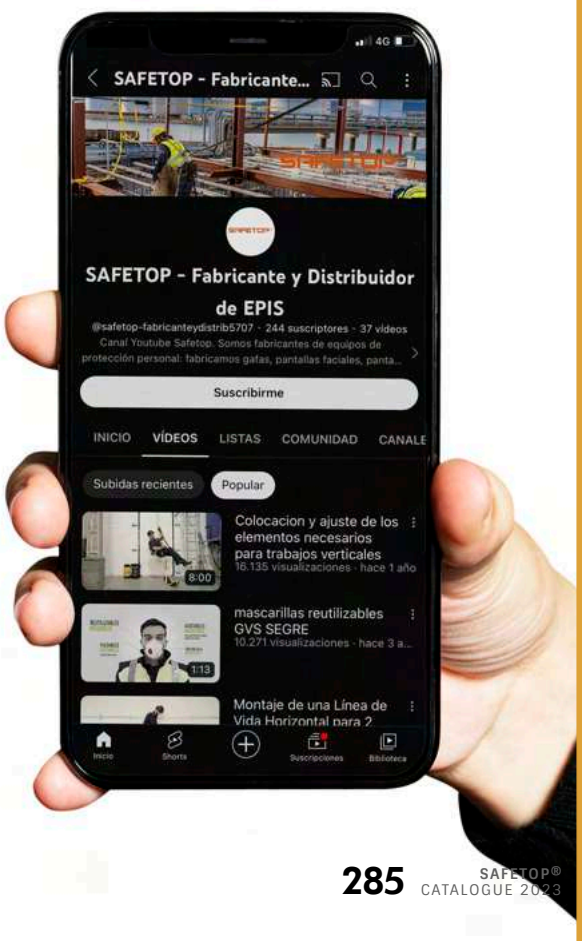

Exhibitors

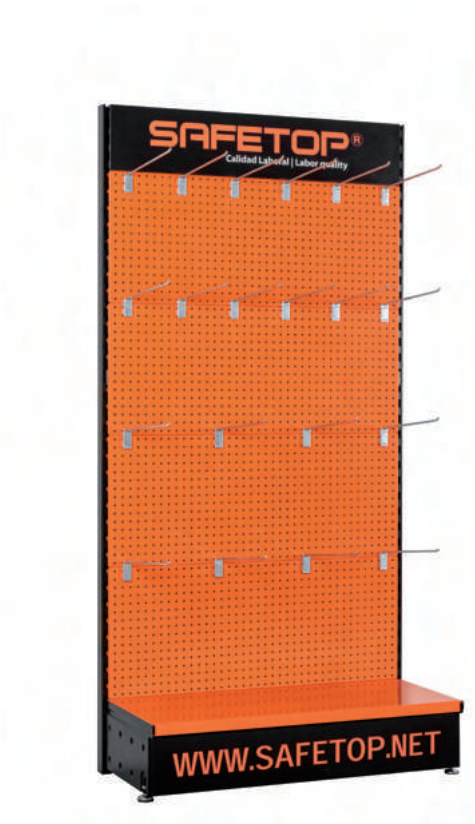



80X180 cm	00621	00614	1600x600x300 mm
500x540x180 mm	00617	00615	500x540x180 mm









1700x550x350 mm	00610	00640	90x55 mm
450x300x250 mm	00611	00612	37x17 cm







* Ask us for a quote For a Safetop personal protection area in shop



SAFETOP®

Winning company
of four **Ardán 2022 awards**
for Business Excellence

indicador ARDAN 2022 AP alta productividad Zona Franca Vigo

indicador ARDAN 2022 AR alto rendimiento Zona Franca Vigo

indicador ARDAN 2022 BG bien gestionada Zona Franca Vigo

indicador ARDAN 2022 GR generadora de riqueza Zona Franca Vigo